Bill No. 2021-03

ORDINANCE NO. 4055

AN ORDINANCE APPROVING AN AGREEMENT BETWEEN THE CITY OF CLINTON AND PHILLIPS HARDY, INC, FOR THE CLINTON REGIONAL AIRPORT APRON PROJECT - PHASES 2 & 3.

WHEREAS, the City has selected Phillips Hardy, Inc. to construct apron improvements at the Clinton Regional Airport; and

WHEREAS, the City intends to accomplish the project as described in the attached agreement;

NOW, THEREFORE BE IT HEREBY ORDAINED by the City Council of Clinton, Missouri as follows:

1. The contract with Phillips Hardy, Inc. for the Airport Apron Project - Phases 2 & 3, Project No. 19-022A-1 is hereby approved for the amount of $1,032,285.65.
2. The Mayor is authorized to execute the contract on behalf of the City of Clinton.

This ordinance shall become effective immediately upon its passage and approval as provided by law.

Read the first time this 20th day of April, 2021.
Read a second time and passed this 4th day of May, 2021.

ATTEST:

Wendee Seaton, City Clerk

Greg Lowe, Presiding Officer

8 Ayes - Gene Henry, Roger House, Cameron Jackson, Carla Moberly, Rick Pereles, Becky Raysik, Debbie Smith and Daniel Wilson

0 Nays

0 Absent/Not Voting

Greg Lowe, Mayor

SPECIFICATIONS AND CONTRACT DOCUMENTS

Clinton Regional Airport

Clinton, Missouri

Apron Design Phases 2 Through 6
ISSUED FOR CONSTRUCTION

MoDOT Project No. 19-022A-1
Garver Project No. 19A15701

Prepared For:

City of Clinton



May 2021

GARVER

GarverUSA.com

APRON DESIGN PHASE 2 THROUGH 6
GARVER PROJECT NO. 19A15701
MODOT PROJECT NO. 19-022A-1

I hereby certify that the applicable portions of this project plans and specifications were prepared by me or under my direct supervision and that I am a duly Licensed Engineer under the laws of the State of Missouri.

SEAL AND SIGNATURE	APPLICABLE DIVISION OR PROJECT RESPONSIBILITY
Jason C. Fuehne, P.E.  Digitally Signed: 5/25/2021	Project Manager Civil Engineer
William B. Gilbreath, P.E.  Digitally Signed: 5/25/2021	Electrical Engineer

GARVER, LLC CERTIFICATE OF AUTHORIZATION:

MO ENGINEERING CERTIFICATE/LICENSE NO. 2008013090

Expiration Date: December 31, 2021

BID DOCUMENTS & TECHNICAL SPECIFICATIONS

TABLE OF CONTENTS

SECTION 1
NOTICE TO BIDDERS 3

SECTION 2
INSTRUCTIONS TO BIDDERS 7

SECTION 3
GENERAL PROVISIONS 9

SECTION 4
SUPPLEMENTARY PROVISIONS 71

Part A - FEDERAL AND STATE PROVISIONS 71

Part B - DBE ADMINISTRATION 95

Part C - LOCAL PROVISIONS 101

Part D - FEDERAL AND STATE WAGE RATES 115

SECTION 5
TECHNICAL SPECIFICATIONS 158

APPENDIX
ADVISORY CIRCULARS 160

CONSTRUCTION SAFETY AND PHASING PLAN 164

PROPOSAL/FORMS
PROPOSAL FORM 185

PERFORMANCE BOND 206

PAYMENT BOND 208

CONTRACT AGREEMENT 210

SECTION 1
NOTICE TO BIDDERS

CITY OF CLINTON, MISSOURI
CLINTON REGIONAL AIRPORT
State Block Grant Project No. **19-022A-1**

Sealed bids subject to the conditions and provisions presented herein will be received until **2:00 PM (CDT), Wednesday, March 24th, 2021** and then publicly opened and read at **Clinton City Hall, 105 E. Ohio, Clinton, Missouri 64735** for furnishing all labor, materials, equipment and performing all work necessary to **construct the new General Aviation Apron pavement. Work includes, but is not limited to, a base bid of approximately 4,000 square yards of concrete pavement, 2,000 cubic yards of earthwork, airfield electrical work, and associated items and a bid alternate of an additional approximate 2,400 square yards of concrete pavement and associated items.**

Digital Copies of the bid documents including project drawings and technical specifications are on file and may be inspected at Planroom.GarverUSA.com

A complete set of bid documents may be obtained from http://Planroom.GarverUSA.com/ for a non-refundable fee of $30. These documents may be downloaded by selecting this project from the "Plan Room" link, and by entering Quest Project Number **7625172** on the "Browse Projects" page. For assistance and free membership registration, contact QuestCDN at 952.233.1632 or info@questcdn.com. Addendums to the bid package will be issued through the online Garver Plan Holders List; therefore, all prime bidders shall be responsible for downloading the bid documents from the Garver online plan room in order to be included in the Plan Holders List. Prime bidders should be registered on the Garver Plan Holders List in order to submit a bid on the project.

An Optional Pre-Bid Conference will be held at **10:00 AM (CDT), on Thursday, March 11th, 2021** via virtual meeting. Pre-Bid Conference attendance is optional for bidders on this project. Information regarding the virtual meeting will be sent out to all plan holders one week prior to the meeting time. Potential bidders not on the plan holder list prior to the pre-bid conference can request access to the pre-bid conference by contacting Jason Fuehne at JCFuehne@GarverUSA.com.

Contract Time. The owner has established a contract performance time of **Sixty (60) calendar days for the base bid and an additional thirty (30) calendar days for the additive alternate** from the date of the Notice-to-Proceed. All project work shall be substantially completed within the stated timeframe. This project is subject to liquidated damages as prescribed in the project manual.

Bid Security. No bid will be considered unless accompanied by a certified check or cashier's check on any bank or trust company insured by the Federal Deposit Insurance Corporation, payable to **City of Clinton, Missouri**, for not less than five (5) percent of the total amount of the bid, or by a bid bond secured by an approved surety or sureties, payable to the owner, for not less than five (5) percent of the total amount of the bid.

Bonding Requirements. The successful bidder will be required to furnish separate performance and payment bonds each in an amount equal to 100% of the contract price at the time of contract execution.

Award of Contract. All proposals submitted in accordance with the instructions presented herein will be subject to evaluation. Bids may be held by the **City of Clinton, Missouri** for a period not to exceed **ninety (90) calendar days** from the date of the bid opening for the purpose of conducting the bid evaluation.

Award of contract will be based on the lowest aggregate sum proposal submitted from those bidders that are confirmed as being responsive and responsible. If more than one base bid is listed in the Proposal Form, the bidder may bid on Base Bid No. 1 and/or Base Bid No. 2. The owner reserves the right to select any one of the combinations of the base bid(s) and alternate bid(s), which in the judgment of the owner, best serves the owner's interest. The right is reserved, as the **City of Clinton, Missouri** may require, to reject any bid and all bids.

Award of contract is contingent upon the owner receiving Federal-funding assistance under the State Block Grant Program.

Federal Provisions. This project is subject to the following Federal provisions, statutes and regulations:

Equal Employment Opportunity - Executive Order 11246 and 41 CFR Part 60: The Bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Opportunity Construction Contract Specifications" set forth within the supplementary provisions. The successful Bidder shall not discriminate against any employee or applicant for employment because of race, color, religion, sex, or national origin. The Contractor will take affirmative action to ensure that applicants are employed, and that employees are treated during employment without regard to their race, color, religion, sex, or national origin.

Notice of Requirement for Affirmative Action to Ensure Equal Employment Opportunity:

1. The Bidder's attention is called to the "Equal Opportunity Clause" and the "Standard Federal Equal Employment Opportunity Construction Contract Specifications" set forth within the supplementary provisions.

2. The goals and timetables for minority and female participation, expressed in percentage terms for the contractor's aggregate workforce in each trade on all construction work in the covered area, are as follows:

Timetables
Goals for minority participation for each trade: **10.0** %.
Goals for female participation in each trade: 6.9%.

These goals are applicable to all of the contractor's construction work (whether or not it is Federal or federally-assisted) performed in the covered area. If the contractor performs construction work in a geographical area located outside of the covered area, it shall apply the goals established for such geographical area where the work is actually performed. With regard to this second area, the contractor is also subject to the goals for both its federally involved and non-federally involved construction.

The contractor's compliance with the Executive Order and the regulations in 41 CFR Part 60-4 shall be based on its implementation of the Equal Opportunity Clause, specific affirmative action obligations required by the specifications set forth in 41 CFR 60-4.3(a), and its efforts to meet the goals. The hours of minority and female employment and training must be substantially uniform throughout the length of the contract, and in each trade, and the contractor shall make a good faith effort to employ minorities and women evenly on each of its projects. The transfer of minority or female employees or trainees from Contractor to Contractor or from project to project for the sole purpose of meeting the Contractor's goals shall be a violation of the contract, the Executive Order and the regulations in 41 CFR Part 60-4. Compliance with the goals will be measured against the total work hours performed.

3. The Contractor shall provide written notification to the Director of the Office of Federal Contract Compliance Programs (OFCCP) within 10 working days of award of any construction subcontract in excess of $10,000 at any tier for construction work under the contract resulting from this solicitation. The notification shall list the name, address, and telephone number of the subcontractor; employer identification number of the subcontractor; estimated dollar amount of the subcontract; estimated starting and completion dates of the subcontract; and the geographical area in which the subcontract is to be performed.

1. As used in this notice and in the contract resulting from this solicitation, the "covered area" is **City of Clinton, Henry County, Missouri**.

Certification of Nonsegregated Facilities – 41 CFR Part 60: A certification of Nonsegregated Facilities must be submitted prior to the award of a federally-assisted construction contract exceeding $10,000 which is not exempt from the provisions of the Equal Opportunity Clause.

Contractors receiving federally assisted construction contract awards exceeding $10,000 which are not exempt from the provisions of the Equal Opportunity Clause will be required to provide for the forwarding of the notice to prospective subcontractors for supplies and construction contracts where the subcontracts exceed $10,000 and are not exempt from the provisions of the Equal Opportunity Clause. The penalty for making false statements in offers is prescribed in 18 U.S.C. 1001.

Disadvantaged Business Enterprise – 49 CFR Part 26: The requirements of 49 CFR Part 26, Regulations of the U.S. Department of Transportation, apply to this contract. It is the policy of MoDOT and the **City of Clinton** to practice nondiscrimination based on race, color, sex or national origin in the award or performance of this

contract. All firms qualifying under this solicitation are encouraged to submit bids/proposals regardless of their business size or ownership. Awards of this contract will be conditioned upon satisfying the requirements of this section. These requirements apply to all bidders, including those who qualify as a DBE. The owner's award of this contract is condition upon the bidder satisfying the good faith effort requirements of 49 CFR §26.53. A DBE contract goal of **seven (7%)** percent has been established for this contract. The *non-DBE* bidder shall subcontract **seven (7%)** percent of the dollar value of the base bid(s), excluding any additive alternates, to disadvantaged business enterprises (DBE) or make good faith efforts to meet the DBE contract goal. *The bidder and any subcontractor who qualifies as a DBE who subcontracts work to another non-DBE firm must subtract the amount of the non-DBE contract from the total DBE work counted toward the goal, as defined in 49 CFR Part 26.55*.

The apparent successful competitor will be required to submit the following information as a condition of bid responsiveness: (1) the names and addresses of DBE firms that will participate in the contract; (2) a description of the work that each DBE firm will perform; (3) the dollar amount of the participation of each DBE firm participating; (4) written statement from bidder that attests their commitment to use the DBE firm(s) listed under (1) above to meet the owner's project goal; and (5) if the contract goal is not met, evidence of good faith efforts undertaken by the bidder, as described in Appendix A to 49 CFR Part 26.

The apparent successful competitor must provide written confirmation of participation from each of the DBE firms listed in their commitment with the proposal documents as a condition of bid responsiveness.

Davis-Bacon Act, as amended – 29 CFR Part 5: The Contractor is required to comply with wage and labor provisions and to pay minimum wages in accordance with the current schedule of wage rates established by the United States Department of Labor included in the supplementary provisions.

In addition, the contractor will also be required to comply with the wage and labor requirements and pay minimum wages in accordance with the schedule of wage rates established by the Missouri Division of Labor Standards included in the Supplementary Provisions.

The highest rate between the two (Federal and State) for each job classification shall be considered the prevailing wage.

Debarment, Suspension, Ineligibility and Voluntary Exclusion – 49 CFR Part 29: The bidder certifies, by submission of a proposal or acceptance of a contract, that neither it nor its principals are presently debarred, suspended, proposed for debarment, declared ineligible, or voluntarily excluded from participation in this transaction by any Federal department or agency.

Foreign Trade Restriction – 49 CFR Part 30: The Bidder and Bidder's subcontractors, by submission of an offer and/or execution of a contract, is required to certify that it:

a. is not owned or controlled by one or more citizens of a foreign country included in the list of countries that discriminate against U.S. firms published by the Office of the United States Trade Representative (USTR);

b. has not knowingly entered into any contract or subcontract for this project with a person that is a citizen or national of a foreign country on said list, or is owned or controlled directly or indirectly by one or more citizens or nationals of a foreign country on said list; or

c. has not procured any product nor subcontracted for the supply of any product for use on the project that is produced in a foreign country on said list.

Buy American Certificate – Aviation Safety and Capacity Act of 1990: This contract is subject to the "Buy American Preferences" of the Aviation Safety and Capacity Act of 1990. Prospective Bidders are required to certify that steel and manufactured products have been produced in the United States and to clearly identify those items produced or manufactured outside of the United States.

Additional Provisions:
Modification to the project documents may only be made by written addendum by the Owner or Owner's authorized Representative.

The proposal must be made on the forms provided within the bound project manual. Bidders must supply all required information prior to the time of bid opening.

SECTION 2
INSTRUCTIONS TO BIDDERS

This section contains excerpts of the bidding requirements from Section 20 of the General Provisions. The bidder's attention is directed to Section 20 for complete details.

1. **THE EXECUTED PROPOSAL FORM MUST BE SUBMITTED IN ACCORDANCE WITH THE PROJECT MANUAL.**

2. The apparent low bidder shall submit "evidence of competency" and "evidence of financial responsibility" to the owner no later than 3 business days after the specified date for opening bids.

3. Each bidder shall certify in the Proposal Form at the time of bid submittal that they acknowledge receipt of all issued addenda.

4. No bid will be considered unless accompanied by a certified check or cashier's check on any bank or trust company insured by the Federal Deposit Insurance Corporation, payable to the owner, for not less than five (5) percent of the amount of the bid, or by a bid bond secured by an approved surety or sureties (licensed to conduct surety business in the state of Missouri), payable to the owner, for not less than five (5) percent of the amount of the bid.

5. Proposals shall be sent to arrive at the time and date specified in Section 1, Notice to Bidders. Proposals received after the specified time and date will not receive consideration and will be returned unopened. Prior to submittal, the proposal shall be placed in a sealed opaque envelope and addressed to:

   City of Clinton
   Clinton City Hall, 105 E. Ohio St.
   Clinton, MO 64735

   The upper left hand corner of the envelope should be marked as follows:

   Sealed Bid Proposal
   Bid of NAME OF BIDDER
   For construction improvements at **CLINTON REGIONAL AIRPORT**
   State Block Grant Project No.: **19-022A-1**
   To be opened at: **2:00 PM (CDT), Wednesday, March 24th, 2021**

For a modification to a previously submitted proposal, insert "Modification to Proposal" in place of "Sealed Bid Proposal".

6. The Owner reserves the right to reject any or all bids, as determined to be in the best interest of the Owner. Causes for rejection of proposals include but are not limited to:

   - Submittal of more than one proposal from the same partnership, firm or corporation;
   - Failure by Bidder to submit the bid prior to the stated time and date for receipt of bids;
   - Failure by Bidder to furnish satisfactory bid guarantee;
   - Failure by Bidder to provide all information required of the bid forms;
   - Failure by Bidder to comply with the requirements of bid instructions;
   - Failure by Bidder to complete the applicable Buy American Certification;
   - Failure by the Bidder to demonstrate good faith efforts in obtaining participation by certified DBE firms;
   - Determination by the Owner that Bidder is not qualified to accomplish the project work;
   - Determination by the Owner that the Bidder has placed conditions on or qualified their proposal;
   - Discovery of any alteration, interlineations or erasure of any project requirement by the Bidder;
   - Inclusion of the Bidder as an Excluded Party in the System for Award Management;
   - Evidence of collusion among bidders.

7. The **City of Clinton, Missouri** will issue a State sales tax exemption certificate to the successful Bidder and the successful Bidder will not be required to pay State sales tax on materials and supplies purchased for use on this project. The successful Bidder will be responsible for payment of all other taxes.

8. **INTERPRETATIONS AND ADDENDA**
No oral interpretation will be made to any Bidder as to the meaning of the Contract Documents or any part thereof. Every request for such an interpretation shall be made in writing to Garver, 7301 W 129th St. Suite 330, Overland Park, KS 66213, or by email to Jason Fuehne (jcfuehne@garverusa.com). Any inquiry received forty-eight (48) hours prior to the opening of bids will be given consideration. Every interpretation made to a Bidder will be in the form of an Addendum to the contract Documents, and when issued, will be sent to the Plan Holders list located in the electronic plan room at least twenty-four (24) hours before bids are opened. It shall be the Bidder's responsibility to make inquiry to the electronic plan room as to the Addenda issued. All such Addenda shall become part of the Contract and all Bidders shall be bound by such Addenda, whether or not received by the Bidders.

SECTION 3
GENERAL PROVISIONS

INDEX TO GENERAL PROVISIONS

SECTION 10 **DEFINITION OF TERMS**

SECTION 20 **PROPOSAL REQUIREMENTS AND CONDITIONS**

20-01 Bidder Qualifications
20-02 Bid Documents/Project Manual
20-03 Modifications to Project Documents
20-04 Errors and Discrepancies in Project Documents
20-05 Clarifications and Interpretations
20-06 Issuance of Proposal Forms
20-07 Interpretation of Estimated Proposal Quantities
20-08 Examination of Plans, Specifications, and Site Conditions
20-09 Preparation of the Bid Proposal
20-10 Bid Guaranty
20-11 Submission of Bid Proposal
20-12 Modification or Withdrawal of Bid Proposal
20-13 Bid Opening
20-14 Disqualification of Bid Proposals

SECTION 30 **AWARD AND EXECUTION OF CONTRACT**

30-01 Evaluation of Proposals
30-02 Cancellation of Award
30-03 Notice of Award of Contract
30-04 Return of Bid Guaranty
30-05 Contract Agreement
30-06 Performance and Payment Bonds
30-07 Certificates of Insurance
30-08 Approval of Contract

SECTION 40 **SCOPE OF WORK**

40-01 Intent of Contract
40-02 Alteration of Work and Quantities
40-03 Omitted Items
40-04 Extra Work
40-05 Maintenance of Traffic
40-06 Removal of Existing Structures
40-07 Rights In and Use of Materials Found in the Work
40-08 Final Cleaning Up

SECTION 50 **CONTROL OF WORK**

50-01 Authority of the Engineer
50-02 Conformity with Plans and Specifications
50-03 Coordination of Contract, Plans, and Specifications
50-04 Cooperation of Contractor
50-05 Cooperation Between Contractors
50-06 Construction Layout and Stakes
50-07 Automatically Controlled Equipment

50-08 Authority and Duties of Inspectors
50-09 Inspection of the Work
50-10 Removal of Unacceptable and Unauthorized Work
50-11 Load Restrictions
50-12 Maintenance During Construction
50-13 Failure to Maintain the Work
50-14 Partial Acceptance
50-15 Final Acceptance
50-16 Claims for Adjustments and Disputes

SECTION 60 CONTROL OF MATERIALS

60-01 Source of Supply and Quality Requirements
60-02 Samples, Tests, and Cited Specifications
60-03 Certification of Compliance
60-04 Plant Inspection
60-05 Engineer's Field Office
60-06 Storage of Materials
60-07 Unacceptable Materials
60-08 Owner Furnished Materials

SECTION 70 LEGAL REGULATIONS AND RESPONSIBILITY TO PUBLIC

70-01 Laws to be Observed
70-02 Permits, Licenses, and Taxes
70-03 Patented Devices, Materials, and Processes
70-04 Restoration of Surfaces Disturbed by Others
70-05 Federal Aid Participation
70-06 Sanitary, Health, and Safety Provisions
70-07 Public Convenience and Safety
70-08 Barricades, Warning Signs, and Hazard Markings
70-09 Use of Explosives
70-10 Protection and Restoration of Property and Landscape
70-11 Responsibility for Damage Claims
70-12 Third Party Beneficiary Clause
70-13 Opening Sections of the Work to Traffic
70-14 Contractor's Responsibility for Work
70-15 Contractor's Responsibility for Utility Service and Facilities of Others
70-16 Furnishing Rights-of-Way
70-17 Personal Liability of Public Officials
70-18 No Waiver of Legal Rights
70-19 Environmental Protection
70-20 Archaeological and Historical Findings

SECTION 80 PROSECUTION AND PROGRESS

80-01 Subletting of Contract
80-02 Notice to Proceed
80-03 Prosecution and Progress
80-04 Limitation of Operations
80-04.1 Operational Safety on Airport During Construction
80-05 Character of Workers, Methods, and Equipment
80-06 Temporary Suspension of the Work
80-07 Determination and Extension of Contract Time
80-08 Failure to Complete on Time
80-09 Default and Termination of Contract

80-10 Termination for National Emergencies
80-11 Work Area, Storage Area, and Sequence of Operations

SECTION 90 MEASUREMENT AND PAYMENT

90-01 Measurement of Quantities
90-02 Scope of Payment
90-03 Compensation for Altered Quantities
90-04 Payment for Omitted Items
90-05 Payment for Extra and Force Account Work
90-06 Partial Payments
90-07 Payment for Materials on Hand
90-08 Payment of Withheld Funds
90-09 Acceptance and Final Payment
90-10 Construction Warranty
90-11 Project Closeout

SECTION 100 CONTRACTOR QUALITY CONTROL PROGRAM

100-01 General
100-02 Description of Program
100-03 Quality Control Organization
100-04 Project Progress Schedule
100-05 Submittals Schedule
100-06 Inspection Requirements
100-07 Quality Control Testing Plan
100-08 Documentation
100-09 Corrective Action Requirements
100-10 Surveillance by the Engineer
100-11 Noncompliance

SECTION 110 METHOD OF ESTIMATING PERCENTAGE OF MATERIAL WITHIN SPECIFICATION LIMITS (PWL)

110-01 General
110-02 Method of Computing PWL

SECTION 10
DEFINITION OF TERMS

Whenever the following terms are used in these specifications, in the contract, or in any documents or other instruments pertaining to construction where these specifications govern, the intent and meaning shall be interpreted as follows:

10-01 AASHTO. The American Association of State Highway and Transportation Officials, the successor association to AASHO.

10-02 ACCESS ROAD. The right-of-way, the roadway and all improvements constructed thereon connecting the airport to a public highway.

10-03 ADVERTISEMENT. A public announcement, as required by local law, inviting bids for work to be performed and materials to be furnished.

10-04 AIP. The Airport Improvement Program, a grant-in-aid program, administered by the Federal Aviation Administration.

10-05 AIR OPERATIONS AREA. For the purpose of these specifications, the term air operations area shall mean any area of the airport used or intended to be used for the landing, takeoff, or surface maneuvering of aircraft. An air operations area shall include such paved or unpaved areas that are used or intended to be used for the unobstructed movement of aircraft in addition to its associated runway, taxiway, or apron.

10-06 AIRPORT. Airport means an area of land or water which is used or intended to be used for the landing and takeoff of aircraft; an appurtenant area used or intended to be used for airport buildings or other airport facilities or rights of way; and airport buildings and facilities located in any of these areas, and includes a heliport.

10-07 ASTM. The American Society for Testing and Materials.

10-08 AWARD. The acceptance, by the Owner, of the successful bidder's proposal.

10-09 BIDDER. Any individual, partnership, firm, or corporation, acting directly or through a duly authorized representative, who submits a proposal for the work contemplated.

10-10 BUILDING AREA. An area on the airport to be used, considered, or intended to be used for airport buildings or other airport facilities or rights-of-way together with all airport buildings and facilities located thereon.

10-11 CALENDAR DAY. Every day shown on the calendar.

10-12 CHANGE ORDER. A written order to the Contractor covering changes in the plans, specifications, or proposal quantities and establishing the basis of payment and contract time adjustment, if any, for the work affected by such changes. The work, covered by a change order, shall be within the scope of the contract.

10-13 CONTRACT. The written agreement covering the work to be performed. The awarded contract shall include, but is not limited to: The Advertisement; The Contract Form; The Proposal; The Performance Bond; The Payment Bond; any required insurance certificates; The Specifications; The Plans; and any addenda issued to bidders.

10-14 CONTRACT ITEM (PAY ITEM). A specific unit of work for which a price is provided in the contract.

10-15 CONTRACT TIME. The number of calendar days or working days, stated in the proposal, allowed for completion of the contract, including authorized time extensions. If a calendar date of completion is stated in the proposal, in lieu of a number of calendar or working days, the contract shall be completed by that date.

10-16 CONTRACTOR. The individual, partnership, firm, or corporation primarily liable for the acceptable performance of the work contracted and for the payment of all legal debts pertaining to the work who acts directly or through lawful agents or employees to complete the contract work.

10-17 DRAINAGE SYSTEM. The system of pipes, ditches, and structures by which surface or subsurface waters are collected and conducted from the airport area.

10-18 ENGINEER. The individual, partnership, firm, or corporation duly authorized by the Owner to be responsible for engineering inspection of the contract work and acting directly or through an authorized representative.

10-19 EQUIPMENT. All machinery, together with the necessary supplies for upkeep and maintenance, and also all tools and apparatus necessary for the proper construction and acceptable completion of the work.

10-20 EXTRA WORK. An item of work not provided for in the awarded contract as previously modified by change order or supplemental agreement, but which is found by the Engineer to be necessary to complete the work within the intended scope of the contract as previously modified.

10-21 FAA. The Federal Aviation Administration of the U.S. Department of Transportation. When used to designate a person, FAA shall mean the Administrator or his/her duly authorized representative.

10-22 FEDERAL SPECIFICATIONS. The Federal Specifications and Standards, Commercial Item Descriptions, and supplements, amendments, and indices thereto are prepared and issued by the General Services Administration of the Federal Government.

10-23 FORCE ACCOUNT. Not used.

10-24 INSPECTOR. An authorized representative of the Engineer assigned to make all necessary inspections and/or tests of the work performed or being performed, or of the materials furnished or being furnished by the Contractor.

10-25 INTENTION OF TERMS. Whenever in these specifications or on the plans, the words "directed," "required," "permitted," "ordered," "designated," "prescribed," or words of like import are used, it shall be understood that the direction, requirement, permission, order, designation, or prescription of the Engineer is intended; and similarly, the words "approved," "acceptable," "satisfactory," or words of like import, shall mean approved by, or acceptable to, or satisfactory to the Engineer, subject in each case to the final determination of the Owner.

Any reference to a specific requirement of a numbered paragraph of the contract specifications or a cited standard shall be interpreted to include all general requirements of the entire section, specification item, or cited standard that may be pertinent to such specific reference.

10-26 LABORATORY. The official testing laboratories of the Owner or such other laboratories as may be designated by the Engineer.

10-27 LIGHTING. A system of fixtures providing or controlling the light sources used on or near the airport or within the airport buildings. The field lighting includes all luminous signals, markers, floodlights, and illuminating devices used on or near the airport or to aid in the operation of aircraft landing at, taking off from, or taxiing on the airport surface.

10-28 MAJOR AND MINOR CONTRACT ITEMS. A major contract item shall be any item that is listed in the proposal, the total cost of which is equal to or greater than 20 percent of the total amount of the award contract. All other items shall be considered minor contract items.

10-29 MATERIALS. Any substance specified for use in the construction of the contract work.

10-30 NOTICE TO PROCEED. A written notice to the Contractor to begin the actual contract work on a previously agreed to date. If applicable, the Notice to Proceed shall state the date on which the contract time begins.

10-31 OWNER. The term "Owner" shall mean the party of the first part or the contracting agency signatory to the contract. For AIP contracts, the term "sponsor" shall have the same meaning as the term "Owner." Where the term "Owner" is capitalized in this document, it shall mean airport owner or sponsor only.

10-32 PAVEMENT. The combined surface course, base course, and subbase course, if any, considered as a single unit.

10-33 PAYMENT BOND. The approved form of security furnished by the Contractor and his/her surety as a guaranty that the Contractor will pay in full all bills and accounts for materials and labor used in the construction of the work.

10-34 PERFORMANCE BOND. The approved form of security furnished by the Contractor and his/her surety as a guaranty that the Contractor will complete the work in accordance with the terms of the contract.

10-35 PLANS. The official drawings or exact reproductions which show the location, character, dimensions and details of the airport and the work to be done and which are to be considered as a part of the contract, supplementary to the specifications.

10-36 PROJECT. The agreed scope of work for accomplishing specific airport development with respect to a particular airport.

10-37 PROPOSAL. The written offer of the bidder (when submitted on the approved proposal form) to perform the contemplated work and furnish the necessary materials in accordance with the provisions of the plans and specifications.

10-38 PROPOSAL GUARANTY. The security furnished with a proposal to guarantee that the bidder will enter into a contract if his/her proposal is accepted by the Owner.

10-39 RUNWAY. The area on the airport prepared for the landing and takeoff of aircraft.

10-40 SPECIFICATIONS. A part of the contract containing the written directions and requirements for completing the contract work. Standards for specifying materials or testing which are cited in the contract specifications by reference shall have the same force and effect as if included in the contract physically.

10-41 SPONSOR. See definition above of "Owner."

10-42 STRUCTURES. Airport facilities such as bridges; culverts; catch basins, inlets, retaining walls, cribbing; storm and sanitary sewer lines; water lines; underdrains; electrical ducts, manholes, handholes, lighting fixtures and bases; transformers; flexible and rigid pavements; navigational aids; buildings; vaults; and other manmade features of the airport that may be encountered in the work and not otherwise classified herein.

10-43 SUBGRADE. The soil that forms the pavement foundation.

10-44 SUPERINTENDENT. The Contractor's executive representative who is present on the work during progress, authorized to receive and fulfill instructions from the Engineer, and who shall supervise and direct the construction.

10-45 SUPPLEMENTAL AGREEMENT. A written agreement between the Contractor and the Owner covering (1) work that would increase or decrease the total amount of the awarded contract, or any major contract item, by more than 25 percent, such increased or decreased work being within the scope of the originally awarded contract; or (2) work that is not within the scope of the originally awarded contract.

10-46 SURETY. The corporation, partnership, or individual, other than the Contractor, executing payment or performance bonds that are furnished to the Owner by the Contractor.

10-47 TAXIWAY. For the purpose of this document, the term taxiway means the portion of the air operations area of an airport that has been designated by competent airport authority for movement of aircraft to and from the airport's runways or aircraft parking areas.

10-48 WORK. The furnishing of all labor, materials, tools, equipment, and incidentals necessary or convenient to the Contractor's performance of all duties and obligations imposed by the contract, plans, and specifications.

10-49 WORKING DAY. A working day shall be any day other than a legal holiday, Saturday, or Sunday on which the normal working forces of the Contractor may proceed with regular work for at least 6 hours toward completion of the contract. When work is suspended for causes beyond the Contractor's control, it will not be counted as a working day. Saturdays, Sundays and holidays on which the Contractor's forces engage in regular work will be considered a working day.

END OF SECTION 10

SECTION 20
PROPOSAL REQUIREMENTS AND CONDITIONS

20-01 BIDDER QUALIFICATIONS. The apparent low bidder shall furnish the Owner satisfactory evidence of his/her competency and financial capability to perform the proposed work. The Bidder shall demonstrate that they are a responsible firm that possesses the skills, abilities, and integrity to faithfully perform the project work. Evidence of competency shall consist of statements covering the Bidder's past experience on similar work, a listing of plant and equipment immediately available for use on the project, and a listing of key personnel that are available for the project. The listing for plant and equipment shall identify the type, the capacity and the present condition of the item.

Evidence of financial responsibility shall consist of a confidential statement or report of the Bidder's financial resources and liabilities as of the last calendar year. A public accountant must certify such statements and reports. If the Bidder is presently pre-qualified with the Missouri Department of Transportation (MoDOT), evidence of this pre-qualification may serve as evidence of financial responsibility in lieu of the certified financial statements and reports.

The apparent low bidder shall submit "evidence of competency" and "evidence of financial responsibility" to the owner no later than 3 business days after the specified date for opening bids.

20-02 BID DOCUMENTS/PROJECT MANUAL. The bid documents are comprised of the following: Notice to Bidders; Instructions to Bidders; General Provisions; Supplementary Provisions; Technical Specifications; Project Drawings; Proposal Form; Performance and Payment Bonds; Form of Contract Agreement; any authorized addenda issued by the Owner; and any document incorporated in whole or in part by reference therein.

All documents comprising the Bid Documents are complementary to one another and together establish the complete terms, conditions and obligations of the successful bidder.

Those individual elements of the Contract Documents that are bound together shall also be referred to as the Project Manual. **THE EXECUTED PROPOSAL FORM MUST BE SUBMITTED IN ACCORDANCE WITH THE PROJECT MANUAL.**

Prospective bidders may obtain a copy of the project manual and project drawings from the designated office identified within this Notice to Bidders.

20-03 MODIFICATIONS TO PROJECT DOCUMENTS. Modifications to the project documents may only be made by written addendum issued by the Owner or the Engineer. Verbal explanations, interpretations or comments made by the Owner or Owner's representative shall not be binding. Addenda will be transmitted to all known official plan holders. Each bidder shall certify in the Proposal Form at the time of bid submittal, that they acknowledge receipt of all issued addenda.

20-04 ERRORS AND DISCREPANCIES IN PROJECT DOCUMENTS. Should Bidder find an error, discrepancy, ambiguity or omission in the project documents prior to submittal of a proposal, the Bidder is obligated to contact the Owner or Engineer with written notice of the error, discrepancy, ambiguity or omission. The written notice shall identify the nature and location of the error, discrepancy, ambiguity or omission. Corrections or modifications to the project documents will only be made by written addendum as prescribed herein. By submittal of a Bid Proposal, Bidder represents that they have thoroughly reviewed the project documents and that they have not identified any error, discrepancy, ambiguity or omission that would affect cost, progress or performance of the project work.

20-05 CLARIFICATIONS AND INTERPRETATIONS. A Bidder requiring a clarification or interpretation of the project documents shall make a written request to the Owner or Engineer. The Owner or Engineer must receive the written request a minimum of seven (7) calendar days prior to the date of the bid opening.

20-06 ISSUANCE OF PROPOSAL FORMS. The Owner reserves the right to refuse to issue a proposal form to a prospective bidder should such bidder be in default for any of the following reasons:

a. Failure to comply with any prequalification regulations of the Owner, if such regulations are cited, or otherwise included, in the proposal as a requirement for bidding.

b. Failure to pay, or satisfactorily settle, all bills due for labor and materials on former contracts in force (with the Owner) at the time the Owner issues the proposal to a prospective bidder.

c. Contractor default under previous contracts with the Owner.

d. Unsatisfactory work on previous contracts with the Owner.

20-07 INTERPRETATION OF ESTIMATED PROPOSAL QUANTITIES. An estimate of quantities of work to be done and materials to be furnished under these specifications is stated within the project manual. This estimate is a result of careful calculations and is believed to be correct. The estimated quantities are given only as a basis for comparison of proposals and the award of the contract. The Owner does not expressly or impliedly agree that the actual quantities involved will correspond exactly with the estimated quantities. The Bidder shall not plead misunderstanding or deception because of such estimates of quantities, or of the character, location, or other conditions pertaining to the work. Payment to the Contractor will be made only for the actual quantities of work performed or materials furnished in accordance with the plans and specifications. It is understood that the quantities may be increased or decreased as hereinafter provided in the subsection titled "Alteration of Work and Quantities" of the general provisions without in any way invalidating the unit bid prices.

20-08 EXAMINATION OF PLANS, SPECIFICATIONS, AND SITE CONDITIONS. The Bidder is expected to carefully examine the site of the proposed work, the proposal, drawings, specifications, terms and conditions of the proposed agreement and the form of agreement. The Bidder shall satisfy themselves as to the character, quality, and quantities of work to be performed, materials to be furnished, and as to the requirements of the proposed contract. The submission of a proposal shall be prima facie evidence that the Bidder has made such examination and is satisfied as to the conditions to be encountered in performing the work and as to the requirements of the proposed contract, plans, and specifications.

Boring logs and other records of subsurface investigations and tests, as appropriate, may be available for inspection by the Bidder. It is understood and agreed that such subsurface information, whether included in the project drawings, specifications, or otherwise made available to the Bidder, was obtained and is intended for the Owner's design and estimating purposes only. Such information has been made available for the convenience of all bidders. It is further understood and agreed that the Bidder is solely responsible for all assumptions, deductions, or conclusions which he or she may make or obtain from his or her examination of the boring logs and other records of subsurface investigations and tests that are furnished by the Owner.

20-09 PREPARATION OF THE BID PROPOSAL. All bid proposals shall be made on the forms provided by the Owner within the bound Project Manual. No bidder may submit more than one proposal. Each bidder shall specify in the bid, in figures, a unit price for each of the separate items listed in the bid proposal, except a unit price entry will not be necessary for those items having a quantity of one, and only the amount for that item need be entered. Zero will be considered a valid bid. The Bidder shall not enter zero in any "Unit Price" field unless zero is the intended bid for that item. A unit price left blank, with or without an extension, other than items having a quantity of one, will be considered as zero by the owner. The Bidder shall show the products of the respective unit prices and quantities in the amount column provided for that purpose. These extensions shall be totaled and in case of errors or discrepancies in extensions, the unit prices shall govern. All entries in the bid shall be in ink. If, in the sole discretion of the Owner, an obvious and apparent clerical error exists in the unit bid price for an item due to a misplaced decimal, but the extension appears to be correct and as intended in all respects, the Owner may correct the unit price bid in accordance with the extension listed. All errors in extensions or totals will be corrected by the Owner and such corrected extensions and totals will be used in comparing bids.

Bids shall not contain interlineations, alterations or erasures, except a bidder may alter or correct a unit price, lump sum price or extension entered on the Proposal Form by crossing out the figure with ink and entering a new unit price, lump sum bid or extension above or below in ink with his/her initials.

The proposal shall be signed and dated by an authorized representative of the Bidder. All signatures shall be made with an ink pen. The Bidder's representative shall have the legal authority to obligate and bind the Bidder to the terms and conditions of the contract. The Bidder shall legibly state the name of the Bidder's representative, the legal name of the Bidder, and the address of the Bidder including City, State and Zip Code.

- For bids by corporations, an officer of the corporation shall sign the bid, the State of incorporation shall be identified and the corporate seal affixed.

- For bids submitted by an agent, evidence of the power of attorney shall be attached to the bid.

- For bids submitted by a partnership or joint venture, the proposal shall identify the name of all firms and the authorized parties of all firms. A copy of the partnership/joint agreement shall be provided to the owner as an attachment to the proposal.

20-10 BID GUARANTY. No bid will be considered unless accompanied by a certified check or cashier's check on any bank or trust company insured by the Federal Deposit Insurance Corporation, payable to the Owner, for not less than five (5) percent of the amount of the bid, or by a bid bond secured by an approved surety or sureties (licensed to conduct surety business in the state of Missouri), payable to the Owner, for not less than five (5) percent of the amount of the bid.

20-11 SUBMISSION OF BID PROPOSAL. Proposals shall be sent to arrive at the time and date specified in Section 1, Notice to Bidders. Proposals received after the specified time and date will not receive consideration and will be returned unopened. Prior to submittal, the proposal shall be placed in a sealed opaque envelope and addressed as specified in Section 2, Instructions to Bidders, paragraph 5.

20-12 MODIFICATION OR WITHDRAWAL OF BID PROPOSAL. Bidder may modify or withdraw his/her proposal at any point up to the specified time and date identified for receipt of proposals. Any request for bid withdrawal or modification by the Bidder that is received after the specified time and date for receipt of proposals will be returned unopened to the sender.

Any modification to a Bidder's proposal, subject to the time constraint noted herein, must be made on the proposal forms contained in the project manual. The Bidder's authorized representative must sign the modification. The modification shall be placed in a sealed envelope, and the statement "Modification to Proposal" shall be legibly marked in the upper left hand corner. Withdrawal of a proposal may be made, subject to the time constraint noted herein, only with written confirmation under signature of the Bidder.

20-13 BID OPENING. All proposals submitted prior to the stated time and date for receipt of bids will be publicly opened and read aloud by the Owner or the Owner's representative. Bidders, their authorized agents, and other interested parties are invited to attend. Proposals submitted after the stated time and date for receipt of bids will be automatically rejected without consideration and will be returned unopened.

20-14 DISQUALIFICATION OF BID PROPOSALS. The Owner reserves the right to reject any or all bids, as determined to be in the best interest of the Owner. Causes for rejection of proposals include but are not limited to:

- Submittal of more than one proposal from the same partnership, firm or corporation;
- Failure by Bidder to submit the bid prior to the stated time and date for receipt of bids;
- Failure by Bidder to furnish satisfactory bid guarantee;
- Failure by Bidder to provide all information required of the bid forms;
- Failure by Bidder to comply with the requirements of bid instructions;
- Failure by Bidder to complete the applicable Buy American Certification;
- Failure by the Bidder to demonstrate good faith efforts in obtaining participation by certified DBE firms;
- Determination by the Owner that Bidder is not qualified to accomplish the project work;
- Determination by the Owner that the Bidder has placed conditions on or qualified their proposal;
- Discovery of any alteration, interlineations or erasure of any project requirement by the Bidder;
- Inclusion of the Bidder as an Excluded Party in the System for Award Management;
- Evidence of collusion among bidders.

END OF SECTION 20

SECTION 30
AWARD AND EXECUTION OF CONTRACT

30-01 EVALUATION OF PROPOSALS. Proposals may be held by the Owner for purposes of review and evaluation by the Owner for a period not to exceed **ninety (90) calendar days** from the stated date for receipt of bids. The Owner will tabulate all bids and verify proper extension of unit costs. The Bidder shall honor their proposal for the duration of this period of review and evaluation. The bid guaranty will be held by the Owner until this period of review has expired or a contract has been formally executed.

30-02 CANCELLATION OF AWARD. At any time prior to execution of a contract agreement, the Owner reserves the right to cancel the award for any reason without liability to the Bidder, with the exception of the return of the bid guaranty, at any time prior to execution of the contract.

30-03 NOTICE OF AWARD OF CONTRACT. It is the intent of the Owner, after a period of review and evaluation, to award a contract to the responsible bidder that submits the lowest responsive proposal. The successful bidder will be informed their bid has been accepted through the Owner's issuance of a Notice of Award. The Notice of Award shall not be construed as a binding agreement. The proper execution of a contract agreement shall serve as the binding agreement.

Award of this contract is conditioned upon MoDOT concurring in award of contract. The issuance of the Notice of Award will not be made until MoDOT has concurred in award.

Unless specifically stated, the owner reserves the right to accept alternates in any order or combination, which in the judgment of the Owner, best serves the Owner's interest.

30-04 RETURN OF BID GUARANTY. The bid guaranty of the successful Bidder will be returned upon successful execution of the contract documents as specified herein. Failure by the successful Bidder to execute the contract documents within the specified time shall result in forfeiture of the bid guaranty. The bid guaranty of the second and third lowest responsible bidders will be retained for a period of **ninety (90) calendar days** pending the execution of the contract documents by the successful bidder. Except as noted above, the bid guaranty of unsuccessful bidders will be returned at the point their proposal is rejected.

30-05 CONTRACT AGREEMENT. The successful Bidder shall execute the contract agreement in accordance with the accepted bid proposal within thirty (30) days of the date of the Notice of Award. Failure to execute the contract agreement within the specified time frame may result in the bid being awarded to the next low bidder and shall result in the forfeiture of the Bidder's bid guarantee as a liquidated damage.

30-06 PERFORMANCE AND PAYMENT BONDS. The successful Bidder shall furnish separate performance and payment bonds each in the amount of 100% of the contract price. The bonds shall be made payable to the Owner as security for faithful performance of the contract and for the payment of all persons, firms or corporations to whom the Bidder may become legally indebted for labor, materials, tools, equipment or services in the performance of the project work. The form of the bond shall be that provided within the project manual. The current power of attorney for the person signing the bond as a representative of the surety shall be attached to the bonds.

The executed bonds shall be delivered to the Owner within fifteen (15) calendar days from the date of contract execution. Bonds should not be executed prior to execution of the contract agreement. The bonds shall be issued by a solvent Surety, which is certified to operate within the State the project work is located and which is listed in the current issue of the U.S. Treasury Circular 570. If specifically requested by the Owner, the successful Bidder shall obtain and submit information on the surety's financial strength rating.

30-07 CERTIFICATES OF INSURANCE. The successful Bidder shall furnish to the Owner all required certificates of insurance as specified within the project manual.

30-08 APPROVAL OF CONTRACT. Upon receipt of the Contract Agreement, Contract Bonds and Certificate of Insurance as executed by the successful Bidder, the Owner will complete execution of the contract conditioned upon the Owner's judgment that it remains in their best interest to enter into the Agreement.

Delivery of the fully executed Contract Agreement to the successful Bidder shall constitute the Owner's approval to be bound by the successful Bidder's proposal and all terms and conditions of the Contract Agreement.

Upon satisfactory execution of the contract by the successful Bidder and the Owner, all references to "Bidder" in the bid documents become equivalent to the term "Contractor".

END OF SECTION 30

SECTION 40
SCOPE OF WORK

40-01 INTENT OF CONTRACT. The intent of the contract is to provide for construction and completion, in every detail, of the work described. It is further intended that the Contractor shall furnish all labor, materials, equipment, tools, transportation, and supplies required to complete the work in accordance with the plans, specifications, and terms of the contract.

40-02 ALTERATION OF WORK AND QUANTITIES. The Owner reserves and shall have the right to make such alterations in the work as may be necessary or desirable to complete the work originally intended in an acceptable manner. Unless otherwise specified herein, the Engineer shall be and is hereby authorized to make such alterations in the work as may increase or decrease the originally awarded contract quantities, provided that the aggregate of such alterations does not change the total contract cost or the total cost of any major contract item by more than 25 percent (total cost being based on the unit prices and estimated quantities in the awarded contract). Alterations that do not exceed the 25 percent limitation shall not invalidate the contract nor release the surety, and the Contractor agrees to accept payment for such alterations as if the altered work had been a part of the original contract. These alterations that are for work within the general scope of the contract shall be covered by "Change Orders" issued by the Engineer. Change orders for altered work shall include extensions of contract time where, in the Engineer's opinion, such extensions are commensurate with the amount and difficulty of added work.

Should the aggregate amount of altered work exceed the 25 percent limitation hereinbefore specified, such excess altered work shall be covered by supplemental agreement. If the Owner and the Contractor are unable to agree on a unit adjustment for any contract item that requires a supplemental agreement, the Owner reserves the right to terminate the contract with respect to the item and make other arrangements for its completion.

All supplemental agreements shall be approved by the Missouri Department of Transportation's Aviation Section and shall include valid wage determinations of the U.S. Department of Labor and Missouri Division of Labor Standards when the amount of the supplemental agreement exceeds $2,000. However, if the Contractor elects to waive the limitations on work that increases or decreases the originally awarded contract or any major contract item by more than 25 percent, the supplemental agreement shall be subject to the same U.S. Department of Labor and Missouri Division of Labor Standards wage determination as was included in the originally awarded contract.

All supplemental agreements shall require consent of the Contractor's surety and separate performance and payment bonds.

40-03 OMITTED ITEMS. The Engineer may, in the Owner's best interest, omit from the work any contract item, except major contract items. Major contract items may be omitted by a supplemental agreement. Such omission of contract items shall not invalidate any other contract provision or requirement.

Should a contract item be omitted or otherwise ordered to be nonperformed, the Contractor shall be paid for all work performed toward completion of such item prior to the date of the order to omit such item. Payment for work performed shall be in accordance with the subsection titled PAYMENT FOR OMITTED ITEMS of Section 90.

40-04 EXTRA WORK. Should acceptable completion of the contract require the Contractor to perform an item of work for which no basis of payment has been provided in the original contract or previously issued change orders or supplemental agreements, the same shall be called "Extra Work." Extra Work that is within the general scope of the contract shall be covered by written change order. Change orders for such Extra Work shall contain agreed unit prices for performing the change order work in accordance with the requirements specified in the order, and shall contain any adjustment to the contract time that, in the Engineer's opinion, is necessary for completion of such Extra Work.

When determined by the Engineer to be in the Owner's best interest, the Engineer may order the Contractor to proceed with Extra Work by force account as provided in the subsection titled PAYMENT FOR EXTRA AND FORCE ACCOUNT WORK of Section 90.

Extra Work that is necessary for acceptable completion of the project, but is not within the general scope of the work covered by the original contract shall be covered by a Supplemental Agreement, as hereinbefore defined in the subsection titled SUPPLEMENTAL AGREEMENT of Section 10.

Any claim for payment of Extra Work that is not covered by written agreement (change order or supplemental agreement) shall be rejected by the Owner.

40-05 MAINTENANCE OF TRAFFIC. It is the explicit intention of the contract that the safety of aircraft, as well as the Contractor's personnel and equipment, is the most important consideration. It is understood and agreed that the Contractor shall provide for the free and unobstructed movement of aircraft in the air operations areas of the airport with respect to his/her own operations and the operations of all his/her subcontractors as specified in the subsection titled LIMITATION OF OPERATIONS of Section 80. It is further understood and agreed that the Contractor shall provide for the uninterrupted operation of visual and electronic signals (including power supplies thereto) used in the guidance of aircraft while operating to, from, and upon the airport as specified in the subsection titled CONTRACTOR'S RESPONSIBILITY FOR UTILITY SERVICE AND FACILITIES OF OTHERS in Section 70.

With respect to his/her own operations and the operations of all his/her subcontractors, the Contractor shall provide marking, lighting, and other acceptable means of identifying: personnel; equipment; vehicles; storage areas; and any work area or condition that may be hazardous to the operation of aircraft, fire-rescue equipment, or maintenance vehicles at the airport.

When the contract requires the maintenance of vehicular traffic on an existing road, street, or highway during the Contractor's performance of work that is otherwise provided for in the contract, plans, and specifications, the Contractor shall keep such road, street, or highway open to all traffic and shall provide such maintenance as may be required to accommodate traffic. The Contractor shall furnish, erect, and maintain barricades, warning signs, flagpersons, and other traffic control devices in reasonable conformity with the manual of Uniform Traffic Control Devices for Streets and Highways (published by the United States Government Printing Office), unless otherwise specified herein. The Contractor shall also construct and maintain in a safe condition any temporary connections necessary for ingress to and egress from abutting property or intersecting roads, streets or highways. Unless otherwise specified herein, the Contractor will not be required to furnish snow removal for such existing road, street, or highway.

The Contractor shall make his/her own estimate of all labor, materials, equipment, and incidentals necessary for providing the maintenance of aircraft and vehicular traffic as specified in this subsection.

The cost of maintaining the aircraft and vehicular traffic specified in this subsection shall not be measured or paid for directly, but shall be included in the various contract items.

40-06 REMOVAL OF EXISTING STRUCTURES. All existing structures encountered within the established lines, grades, or grading sections shall be removed by the Contractor, unless such existing structures are otherwise specified to be relocated, adjusted up or down, salvaged, abandoned in place, reused in the work or to remain in place. The cost of removing such existing structures shall not be measured or paid for directly, but shall be included in the various contract items.

Should the Contractor encounter an existing structure (above or below ground) in the work for which the disposition is not indicated on the plans, the Engineer shall be notified prior to disturbing such structure. The disposition of existing structures so encountered shall be immediately determined by the Engineer in accordance with the provisions of the contract.

Except as provided in the subsection titled RIGHTS IN AND USE OF MATERIALS FOUND IN THE WORK of this section, it is intended that all existing materials or structures that may be encountered (within the lines, grades, or grading sections established for completion of the work) shall be utilized in the work as otherwise provided for in the contract and shall remain the property of the Owner when so utilized in the work.

40-07 RIGHTS IN AND USE OF MATERIALS FOUND IN THE WORK. Should the Contractor encounter any material such as (but not restricted to) sand, stone, gravel, slag, or concrete slabs within the established lines, grades, or grading sections, the use of which is intended by the terms of the contract to be either embankment or waste, he may at his/her option either:

a. Use such material in another contract item, providing such use is approved by the Engineer and is in conformance with the contract specifications applicable to such use; or

b. Remove such material from the site, upon written approval of the Engineer; or

c. Use such material for his/her own temporary construction on site; or

d. Use such material as intended by the terms of the contract.

Should the Contractor wish to exercise option a., b., or c., he shall request the Engineer's approval in advance of such use.

Should the Engineer approve the Contractor's request to exercise option a., b., or c., the Contractor shall be paid for the excavation or removal of such material at the applicable contract price. The Contractor shall replace, at his/her own expense, such removed or excavated material with an agreed equal volume of material that is acceptable for use in constructing embankment, backfills, or otherwise to the extent that such replacement material is needed to complete the contract work. The Contractor shall not be charged for his/her use of such material so used in the work or removed from the site.

Should the Engineer approve the Contractor's exercise of option a., the Contractor shall be paid, at the applicable contract price, for furnishing and installing such material in accordance with requirements of the contract item in which the material is used.

It is understood and agreed that the Contractor shall make no claim for delays by reason of his/her exercise of option a., b., or c.

The Contractor shall not excavate, remove, or otherwise disturb any material, structure, or part of a structure which is located outside the lines, grades, or grading sections established for the work, except where such excavation or removal is provided for in the contract, plans, or specifications.

40-08 FINAL CLEANING UP. Upon completion of the work and before acceptance and final payment will be made, the Contractor shall remove from the site all machinery, equipment, surplus and discarded materials, rubbish, temporary structures, and stumps or portions of trees. He shall cut all brush and woods within the limits indicated and shall leave the site in a neat and presentable condition. Material cleared from the site and deposited on adjacent property will not be considered as having been disposed of satisfactorily, unless the Contractor has obtained the written permission of such property owner.

END OF SECTION 40

SECTION 50
CONTROL OF WORK

50-01 AUTHORITY OF THE ENGINEER. The Engineer shall decide any and all questions which may arise as to the quality and acceptability of materials furnished, work performed, and as to the manner of performance and rate of progress of the work. The Engineer shall decide all questions that may arise as to the interpretation of the specifications or plans relating to the work. The Engineer shall determine the amount and quality of the several kinds of work performed and materials furnished which are to be paid for under the contract.

The Engineer does not have the authority to accept pavements that do not conform to FAA specification requirements.

50-02 CONFORMITY WITH PLANS AND SPECIFICATIONS. All work and all materials furnished shall be in reasonably close conformity with the lines, grades, grading sections, cross sections, dimensions, material requirements, and testing requirements that are specified (including specified tolerances) in the contract, plans or specifications.

If the Engineer finds the materials furnished, work performed, or the finished product not within reasonably close conformity with the plans and specifications, but that the portion of the work affected will, in his/her opinion, result in a finished product having a level of safety, economy, durability, and workmanship acceptable to the Owner, he/she will advise the Owner of his/her determination that the affected work be accepted and remain in place. In this event, the Engineer will document his/her determination and recommend to the Owner a basis of acceptance that will provide for an adjustment in the contract price for the affected portion of the work. The Engineer's determination and recommended contract price adjustments will be based on good engineering judgment and such tests or retests of the affected work as are, in his/her opinion, needed. Changes in the contract price shall be covered by contract modifications (change order or supplemental agreement) as applicable.

If the Engineer finds the materials furnished, work performed, or the finished product are not in reasonably close conformity with the plans and specifications and have resulted in an unacceptable finished product, the affected work or materials shall be removed and replaced or otherwise corrected by and at the expense of the Contractor in accordance with the Engineer's written orders.

For the purpose of this subsection, the term "reasonably close conformity" shall not be construed as waiving the Contractor's responsibility to complete the work in accordance with the contract, plans, and specifications. The term shall not be construed as waiving the Engineer's responsibility to insist on strict compliance with the requirements of the contract, plans, and specifications during the Contractor's prosecution of the work, when, in the Engineer's opinion, such compliance is essential to provide an acceptable finished portion of the work.

For the purpose of this subsection, the term "reasonably close conformity" is also intended to provide the Engineer with the authority, after consultation with MoDOT and/or the FAA, to use good engineering judgment in his/her determinations as to acceptance of work that is not in strict conformity, but will provide a finished product equal to or better than that intended by the requirements of the contract, plans and specifications.

The Engineer will not be responsible for the Contractor's means, methods, techniques, sequences, or procedures of construction or the safety precautions incident thereto.

50-03 COORDINATION OF CONTRACT, PLANS, AND SPECIFICATIONS. The contract, plans, specifications, and all referenced standards cited are essential parts of the contract requirements. A requirement occurring in one is as binding as though occurring in all. They are intended to be complementary and to describe and provide for a complete work. In case of discrepancy, calculated dimensions will govern over scaled dimensions; contract technical specifications shall govern over contract general provisions, plans, cited standards for materials or testing, and cited FAA advisory circulars; contract general provisions shall govern over plans, cited standards for materials or testing, and cited FAA Advisory Circulars; plans shall govern over cited standards for materials or testing and cited FAA Advisory Circulars. If any paragraphs contained in the Special Provisions conflict with General Provisions or Technical Specifications, the Special Provisions shall govern.

The Contractor shall not take advantage of any apparent error or omission on the plans or specifications. In the event the Contractor discovers any apparent error or discrepancy, he shall immediately call upon the Engineer for his/her interpretation and decision, and such decision shall be final.

50-04 COOPERATION OF CONTRACTOR. The Contractor will be supplied with five copies each of the plans and specifications. He shall have available on the work at all times one copy each of the plans and specifications. Additional copies of plans and specifications may be obtained by the Contractor for the cost of reproduction.

The Contractor shall give constant attention to the work to facilitate the progress thereof, and he shall cooperate with the Engineer and his/her inspectors and with other contractors in every way possible. The Contractor shall have a competent superintendent on the work at all times who is fully authorized as his/her agent on the work. The superintendent shall be capable of reading and thoroughly understanding the plans and specifications and shall receive and fulfill instructions from the Engineer or his/her authorized representative.

50-05 COOPERATION BETWEEN CONTRACTORS. The Owner reserves the right to contract for and perform other or additional work on or near the work covered by this contract.

When separate contracts are let within the limits of any one project, each Contractor shall conduct his/her work so as not to interfere with or hinder the progress of completion of the work being performed by other Contractors. Contractors working on the same project shall cooperate with each other as directed.

Each Contractor involved shall assume all liability, financial or otherwise, in connection with his/her contract and shall protect and save harmless the Owner from any and all damages or claims that may arise because of inconvenience, delays, or loss experienced by him because of the presence and operations of other Contractors working within the limits of the same project.

The Contractor shall arrange his/her work and shall place and dispose of the materials being used so as not to interfere with the operations of the other Contractors within the limits of the same project. He shall join his/her work with that of the others in an acceptable manner and shall perform it in proper sequence to that of the others.

50-06 CONSTRUCTION LAYOUT AND STAKES. This work shall consist of providing the necessary surveying and staking for the successful prosecution of the work.

The Engineer shall establish horizontal and vertical control only. Such stakes and markings as the Engineer may set for either his/her own or the Contractor's guidance shall be preserved by the Contractor. In case of negligence on the part of the Contractor, or his/her employees, resulting in the destruction of such stakes or markings, an amount equal to the cost of replacing the same may be deducted from subsequent estimates due the Contractor at the discretion of the Engineer.

The Contractor must establish all layout required for the construction of the work. The Contractor will be required to furnish all lines, grades and measurements from the control points necessary for the proper prosecution and control of the work contracted for under these specifications. All surveying work performed by the Contractor shall be sufficient and accurate to construct the work in accordance with the contract documents. Any delays or additional costs to the project which result from insufficient or inaccurate staking or time lost to corrective action will be considered as a non-excusable and non-compensable delay.

The Contractor must give copies of survey notes to the Engineer for each area of construction and for each placement of material as specified to allow the Engineer to make periodic checks for conformance with plan grades, alignments and grade tolerances required by the applicable material specifications. All surveys must be provided to the Engineer prior to commencing work items that will cover or disturb the survey staking as set by the Contractor's surveyor. All documents shall be labeled with the project, Contractor name, survey party supervisor and the date work was performed. Survey(s) and notes shall be provided in the following format(s): AutoCAD and Microsoft Excel. In the case of error, on the part of the Contractor, their surveyor, employees or subcontractors, resulting in established grades, alignment or grade tolerances that do not concur with those specified or shown on the plans, the Contractor is solely responsible for correction, removal, replacement and all associated costs at no additional cost to the Owner.

All surveying and measurements necessary for computing pay quantities will be performed by the Engineer. The Contractor shall notify the Engineer at least two working days prior to disturbing any areas used to calculate pay quantities.

Adjustments necessary to provide accurate staking or match improvements to existing features shall be immediately brought to the attention of the Engineer. The Engineer shall determine the nature of the discrepancy and will make

revisions as necessary. The Contractor shall perform any re-staking required by such revision. Any reimbursement due the Contractor for additional staking due to errors in the plans will be in accordance with Section 40-04.

No direct payment will be made, unless otherwise specified in contract documents, for this labor, materials, or other expenses therewith. The cost thereof shall be included in the price of the bid for the various items of the Contract.

Unless otherwise approved by the Engineer, Construction Staking and Layout includes but is not limited to:

a. Clearing and Grubbing perimeter staking
b. Rough Grade slope stakes at 100-foot (30-m) stations
c. Drainage Swales slope stakes and flow line blue tops at 50-foot (15-m) stations

Subgrade blue tops at 25-foot (7.5-m) stations and 25-foot (7.5-m) offset distance (maximum) for the following section locations:

a. Runway – minimum five (5) per station
b. Taxiways – minimum three (3) per station
c. Holding apron areas – minimum three (3) per station
d. Roadways – minimum three (3) per station

Base Course blue tops at 25-foot (7.5-m) stations and 25-foot (7.5-m) offset distance (maximum) for the following section locations:

a. Runway – minimum five (5) per station
b. Taxiways – minimum three (3) per station
c. Holding apron areas – minimum three (3) per station

Pavement areas:

a. Edge of Pavement hubs and tacks (for stringline by Contractor) at 100-foot (30-m) stations.
b. Between Lifts at 25-foot (7.5-m) stations for the following section locations:
    (1) Runways – each paving lane width
    (2) Taxiways – each paving lane width
    (3) Holding areas – each paving lane width
c. After finish paving operations at 50-foot (15-m) stations:
    (1) All paved areas – Edge of each paving lane prior to next paving lot
d. Shoulder and safety area blue tops at 50-foot (15-m) stations and at all break points with maximum of 50-foot (15-m) offsets.
e. Fence lines at 100-foot (30-m) stations minimum.
f. Electrical and Communications System locations, lines and grades including but not limited to duct runs, connections, fixtures, signs, lights, Visual Approach Slope Indicators (VASIs), Precision Approach Path Indicators (PAPIs), Runway End Identifier Lighting (REIL), Wind Cones, Distance Markers (signs), pull boxes and manholes.
g. Drain lines, cut stakes and alignment on 25-foot (7.5-m) stations, inlet and manholes.
h. Painting and Striping layout (pinned with 1.5 inch PK nails) marked for paint Contractor. (All nails shall be removed after painting).
i. Laser, or other automatic control devices, shall be checked with temporary control point or grade hub at a minimum of once per 400 feet (120 m) per pass (that is, paving lane).

The establishment of Survey Control and/or reestablishment of survey control shall be by a State Licensed Land Surveyor.

Controls and stakes disturbed or suspect of having been disturbed shall be checked and/or reset as directed by the Engineer without additional cost to the Owner.

50-07 AUTOMATICALLY CONTROLLED EQUIPMENT. Whenever batching or mixing plant equipment is required to be operated automatically under the contract and a breakdown or malfunction of the automatic controls occurs, the equipment may be operated manually or by other methods for a period of 48 hours following the breakdown or malfunction, provided this method of operations will produce results which conform to all other requirements of the contract.

50-08 AUTHORITY AND DUTIES OF INSPECTORS. Inspectors employed by the Owner shall be authorized to inspect all work done and all material furnished. Such inspection may extend to all or any part of the work and to the preparation, fabrication, or manufacture of the materials to be used. Inspectors are not authorized to revoke, alter, or waive any provision of the contract. Inspectors are not authorized to issue instructions contrary to the plans and specifications or to act as foreman for the Contractor.

Inspectors employed by the Owner are authorized to notify the Contractor or his/her representatives of any failure of the work or materials to conform to the requirements of the contract, plans, or specifications and to reject such nonconforming materials in question until such issues can be referred to the Engineer for his/her decision.

50-09 INSPECTION OF THE WORK. All materials and each part or detail of the work shall be subject to inspection by the Engineer. The Engineer shall be allowed access to all parts of the work and shall be furnished with such information and assistance by the Contractor as is required to make a complete and detailed inspection.

If the Engineer requests it, the Contractor, at any time before acceptance of the work, shall remove or uncover such portions of the finished work as may be directed. After examination, the Contractor shall restore said portions of the work to the standard required by the specifications. Should the work thus exposed or examined prove acceptable, the uncovering or removing and the replacing of the covering or making good of the parts removed will be paid for as extra work; but should the work so exposed or examined prove unacceptable, the uncovering or removing and the replacing of the covering or making good of the parts removed will be at the Contractor's expense.

Any work done or materials used without supervision or inspection by an authorized representative of the Owner may be ordered removed and replaced at the Contractor's expense, unless the Owner's representative failed to inspect after having been given reasonable notice in writing that the work was to be performed.

Should the contract work include relocation, adjustment, or any other modification to existing facilities not the property of the (contract) Owner, authorized representatives of the owners of such facilities shall have the right to inspect such work. Such inspection shall in no sense make any facility owner a party to the contract, and shall in no way interfere with the rights of the parties to this contract.

50-10 REMOVAL OF UNACCEPTABLE AND UNAUTHORIZED WORK. All work that does not conform to the requirements of the contract, plans, and specifications will be considered unacceptable, unless otherwise determined acceptable by the Engineer as provided in the subsection titled CONFORMITY WITH PLANS AND SPECIFICATIONS of this section.

Unacceptable work, whether the result of poor workmanship, use of defective materials, damage through carelessness, or any other cause found to exist prior to the final acceptance of the work, shall be removed immediately and replaced in an acceptable manner in accordance with the provisions of the subsection titled CONTRACTOR'S RESPONSIBILITY FOR WORK of Section 70.

No removal work made under provision of this subsection shall be done without lines and grades having been given by the Engineer. Work done contrary to the instructions of the Engineer, work done beyond the lines shown on the plans or as given, except as herein specified, or any extra work done without authority, will be considered as unauthorized and will not be paid for under the provisions of the contract. Work so done may be ordered removed or replaced at the Contractor's expense.

Upon failure on the part of the Contractor to comply forthwith with any order of the Engineer made under the provisions of this subsection, the Engineer will have authority to cause unacceptable work to be remedied or removed and replaced and unauthorized work to be removed and to deduct the costs (incurred by the Owner) from any monies due or to become due the Contractor.

50-11 LOAD RESTRICTIONS. The Contractor shall comply with all legal load restrictions in the hauling of materials on public roads beyond the limits of the work. A special permit will not relieve the Contractor of liability for damage that may result from the moving of material or equipment.

The operation of equipment of such weight or so loaded as to cause damage to structures or to any other type of construction will not be permitted. Hauling of materials over the base course or surface course under construction shall be limited as directed. No loads will be permitted on a concrete pavement, base, or structure before the expiration of the curing period. The Contractor shall be responsible for all damage done by his/her hauling equipment and shall correct such damage at his/her own expense.

50-12 MAINTENANCE DURING CONSTRUCTION. The Contractor shall maintain the work during construction and until the work is accepted. This maintenance shall constitute continuous and effective work prosecuted day by day, with adequate equipment and forces so that the work is maintained in satisfactory condition at all times.

In the case of a contract for the placing of a course upon a course or subgrade previously constructed, the Contractor shall maintain the previous course or subgrade during all construction operations.

All costs of maintenance work during construction and before the project is accepted shall be included in the unit prices bid on the various contract items, and the Contractor will not be paid an additional amount for such work.

50-13 FAILURE TO MAINTAIN THE WORK. Should the Contractor at any time fail to maintain the work as provided in the subsection titled MAINTENANCE DURING CONSTRUCTION of this section, the Engineer shall immediately notify the Contractor of such noncompliance. Such notification shall specify a reasonable time within which the Contractor shall be required to remedy such unsatisfactory maintenance condition. The time specified will give due consideration to the exigency that exists.

Should the Contractor fail to respond to the Engineer's notification, the Owner may suspend any work necessary for the Owner to correct such unsatisfactory maintenance condition, depending on the exigency that exists. Any maintenance cost incurred by the Owner shall be deducted from monies due or to become due the Contractor.

50-14 PARTIAL ACCEPTANCE. If at any time during the prosecution of the project the Contractor substantially completes a usable unit or portion of the work, the occupancy of which will benefit the Owner, he may request the Engineer to make final inspection of that unit. If the Engineer finds upon inspection that the unit has been satisfactorily completed in compliance with the contract, he may accept it as being completed, and the Contractor may be relieved of further responsibility for that unit. Such partial acceptance and beneficial occupancy by the Owner shall not void or alter any provision of the contract.

50-15 FINAL ACCEPTANCE. Upon due notice from the Contractor of presumptive completion of the entire project, the Engineer and Owner will make an inspection. If all construction provided for and contemplated by the contract is found to be completed in accordance with the contract, plans, and specifications, such inspection shall constitute the final inspection. The Engineer shall notify the Contractor in writing of final acceptance as of the date of the final inspection.

If, however, the inspection discloses any work, in whole or in part, as being unsatisfactory, the Engineer will give the Contractor the necessary instructions for correction of same and the Contractor shall immediately comply with and execute such instructions. Upon correction of the work, another inspection will be made which shall constitute the final inspection, provided the work has been satisfactorily completed. In such event, the Engineer will make the final acceptance and notify the Contractor in writing of this acceptance as of the date of final inspection.

50-16 CLAIMS FOR ADJUSTMENT AND DISPUTES. If for any reason the Contractor deems that additional compensation is due him/her for work or materials not clearly provided for in the contract, plans, or specifications or previously authorized as extra work, he/she shall notify the Engineer in writing of his/her intention to claim such additional compensation before he/she begins the work on which he/she bases the claim. If such notification is not given or the Engineer is not afforded proper opportunity by the Contractor for keeping strict account of actual cost as required, then the Contractor hereby agrees to waive any claim for such additional compensation. Such notice by the Contractor and the fact that the Engineer has kept account of the cost of the work shall not in any way be construed as proving or substantiating the validity of the claim. When the work on which the claim for additional compensation is based has been completed, the Contractor shall, within 10 calendar days, submit his/her written claim to the Engineer who will present it to the Owner for consideration in accordance with local laws or ordinances.

Nothing in this subsection shall be construed as a waiver of the Contractor's right to dispute final payment based on differences in measurements or computations.

END OF SECTION 50

SECTION 60
CONTROL OF MATERIALS

60-01 SOURCE OF SUPPLY AND QUALITY REQUIREMENTS. The materials used on the work shall conform to the requirements of the contract, plans, and specifications. Unless otherwise specified, such materials that are manufactured or processed shall be new (as compared to used or reprocessed).

In order to expedite the inspection and testing of materials, the Contractor shall furnish complete statements to the Engineer as to the origin, composition, and manufacture of all materials to be used in the work. Such statements shall be furnished promptly after execution of the contract but, in all cases, prior to delivery of such materials.

Note statement of origin should clearly address compliance with Buy American Provisions of Contract.

At the Engineer's option, materials may be approved at the source of supply before delivery is stated. If it is found after trial that sources of supply for previously approved materials do not produce specified products, the Contractor shall furnish materials from other sources.

The Contractor shall furnish airport lighting equipment that conforms to the requirements of cited materials specifications. In addition, where an FAA specification for airport lighting equipment is cited in the plans or specifications, the Contractor shall furnish such equipment that is:

a. Listed in FAA Advisory Circular (AC) 150/5345-53, Airport Lighting Equipment Certification Program, that is in effect on the date of advertisement; and,

b. Produced by the manufacturer as listed in the Addendum to AC 150/5345-53.

60-02 SAMPLES, TESTS, AND CITED SPECIFICATIONS. Unless otherwise designated, all materials used in the work shall be inspected, tested, and approved by the Engineer before incorporation in the work. Any work in which untested materials are used without approval or written permission of the Engineer shall be performed at the Contractor's risk. Materials found to be unacceptable and unauthorized will not be paid for and, if directed by the Engineer, shall be removed at the Contractor's expense. Unless otherwise designated, tests in accordance with the cited standard methods of ASTM, AASHTO, Federal Specifications, Commercial Item Descriptions, and all other cited methods, which are current on the date of advertisement for bids, will be made by and at the expense of the Engineer. The testing organizations performing on site field tests shall have copies of all referenced standards on the construction site for use by all technicians and other personnel, including the Contractor's representative at his/her request. Unless otherwise designated, samples will be taken by a qualified representative of the Engineer. All materials being used are subject to inspection, test, or rejection at any time prior to or during incorporation into the work. Copies of all tests will be furnished to the Contractor's representative at his/her request.

The Contractor shall employ a testing organization to perform all Contractor required tests. The Contractor shall submit to the Engineer resumes on all testing organizations and individual persons who will be performing the tests. The Engineer will determine if such persons are qualified. All the test data shall be reported to the Engineer after the results are known. A legible, handwritten copy of all test data shall be given to the Engineer daily, along with printed reports, in an approved format on a weekly basis. After completion of the project, and prior to final payment, the Contractor shall submit a final report to the Engineer showing all test data reports, plus an analysis of all results showing ranges, averages, and corrective action taken on all failing tests.

60-03 CERTIFICATION OF COMPLIANCE. The Engineer may permit the use, prior to sampling and testing, of certain materials or assemblies when accompanied by manufacturer's certificates of compliance stating that such materials or assemblies fully comply with the requirements of the contract. The certificate shall be signed by the manufacturer. Each lot of such materials or assemblies delivered to the work must be accompanied by a certificate of compliance in which the lot is clearly identified.

Materials or assemblies used on the basis of certificates of compliance may be sampled and tested at any time, and if found not to be in conformity with contract requirements, will be subject to rejection whether in place or not.

The form and distribution of certificates of compliance shall be as approved by the Engineer.

When a material or assembly is specified by "brand name or equal" and the Contractor elects to furnish the specified "brand name," the Contractor shall be required to furnish the manufacturer's certificate of compliance for each lot of such material or assembly delivered to the work. Such certificate of compliance shall clearly identify each lot delivered and shall certify as to:

a. Conformance to the specified performance, testing, quality or dimensional requirements; and,

b. Suitability of the material or assembly for the use intended in the contract work.

Should the Contractor propose to furnish an "or equal" material or assembly, he/she shall furnish the manufacturer's certificates of compliance as hereinbefore described for the specified brand name material or assembly. However, the Engineer shall be the sole judge as to whether the proposed "or equal" is suitable for use in the work.

The Engineer reserves the right to refuse permission for use of materials or assemblies on the basis of certificates of compliance.

60-04 PLANT INSPECTION. The Engineer or his/her authorized representative may inspect, at its source, any specified material or assembly to be used in the work. Manufacturing plants may be inspected from time to time for the purpose of determining compliance with specified manufacturing methods or materials to be used in the work and to obtain samples required for the Engineer's acceptance of the material or assembly.

Should the Engineer conduct plant inspections, the following conditions shall exist:

a. The Engineer shall have the cooperation and assistance of the Contractor and the producer with whom he/she has contracted for materials.

b. The Engineer shall have full entry at all reasonable times to such parts of the plant that concern the manufacture or production of the materials being furnished.

c. If required by the Engineer, the Contractor shall arrange for adequate office or working space that may be reasonably needed for conducting plant inspections. Office or working space should be conveniently located with respect to the plant.

It is understood and agreed that the Owner shall have the right to retest any material that has been tested and approved at the source of supply after it has been delivered to the site. The Engineer shall have the right to reject only material which, when retested, does not meet the requirements of the contract, plans, or specifications.

60-05 ENGINEER'S FIELD OFFICE. *See Specification C-105.* ~~The Contractor shall furnish for the duration of the project one building for the use of the field engineers and inspectors as a field office. This facility shall be an approved weatherproof building meeting the current State Highway Specifications (for example, Class I Field Office or Type C Structure). This building shall be located conveniently near to the construction and shall be separate from any building used by the Contractor. A landline telephone and answering machine shall be provided. The Contractor shall be responsible for payment of the basic monthly charge and local calls only. Any Long Distance Tolls shall be the responsibility of the caller. The Contractor shall furnish **{FAX machine, photocopy machine, water, sanitary facilities, heat, air conditioning, and electricity}**. No direct payment will be made for this building or labor, materials, ground rental, or other expense in connection therewith. The cost hereof shall be included in the price bid for the various items of the contract. The Contractor and his/her superintendent shall provide all reasonable facilities to enable the Engineer to inspect the workmanship and materials entering into the work.~~

60-06 STORAGE OF MATERIALS. Materials shall be so stored as to assure the preservation of their quality and fitness for the work. Stored materials, even though approved before storage, may again be inspected prior to their use in the work. Stored materials shall be located so as to facilitate their prompt inspection. The Contractor shall coordinate the storage of all materials with the Engineer. Materials to be stored on airport property shall not create an obstruction to air navigation, nor shall they interfere with the free and unobstructed movement of aircraft. Unless otherwise shown on the plans, the storage of materials and the location of the Contractor's plant and parked equipment or vehicles shall be as directed by the Engineer. Private property shall not be used for storage purposes without written permission of the owner or lessee of such property. The Contractor shall make all arrangements and bear all expenses for the storage of materials on private property. Upon request, the Contractor shall furnish the Engineer a copy of the property owner's permission.

All storage sites on private or airport property shall be restored to their original condition by the Contractor at his/her entire expense, except as otherwise agreed to (in writing) by the owner or lessee of the property.

60-07 UNACCEPTABLE MATERIALS. Any material or assembly that does not conform to the requirements of the contract, plans, or specifications shall be considered unacceptable and shall be rejected. The Contractor shall remove any rejected material or assembly from the site of the work, unless otherwise instructed by the Engineer.

Rejected material or assembly, the defects of which have been corrected by the Contractor, shall not be returned to the site of the work until such time as the Engineer has approved its used in the work.

60-08 OWNER FURNISHED MATERIALS. The Contractor shall furnish all materials required to complete the work, except those specified herein (if any) to be furnished by the Owner. Owner-furnished materials shall be made available to the Contractor at the location specified herein.

All costs of handling, transportation from the specified location to the site of work, storage, and installing Owner-furnished materials shall be included in the unit price bid for the contract item in which such Owner-furnished material is used.

After any Owner-furnished material has been delivered to the location specified, the Contractor shall be responsible for any demurrage, damage, loss, or other deficiencies that may occur during the Contractor's handling, storage, or use of such Owner-furnished material. The Owner will deduct from any monies due or to become due the Contractor any cost incurred by the Owner in making good such loss due to the Contractor's handling, storage, or use of Owner-furnished materials.

END OF SECTION 60

SECTION 70
LEGAL REGULATIONS AND RESPONSIBILITY TO PUBLIC

70-01 LAWS TO BE OBSERVED. The Contractor shall keep fully informed of all Federal and state laws, all local laws, ordinances, and regulations and all orders and decrees of bodies or tribunals having any jurisdiction or authority which in any manner affect those engaged or employed on the work, or which in any way affect the conduct of the work. He/she shall at all times observe and comply with all such laws, ordinances, regulations, orders, and decrees; and shall protect and indemnify the Owner and all his/her officers, agents, or servants against any claim or liability arising from or based on the violation of any such law, ordinance, regulation, order, or decree, whether by himself or his/her employees.

70-02 PERMITS, LICENSES, AND TAXES. The Contractor shall procure all permits and licenses, pay all charges, fees, and taxes, and give all notices necessary and incidental to the due and lawful prosecution of the work.

70-03 PATENTED DEVICES, MATERIALS, AND PROCESSES. If the Contractor is required or desires to use any design, device, material, or process covered by letters of patent or copyright, he shall provide for such use by suitable legal agreement with the patentee or owner. The Contractor and the surety shall indemnify and save harmless the Owner, any third party, or political subdivision from any and all claims for infringement by reason of the use of any such patented design, device, material or process, or any trademark or copyright, and shall indemnify the Owner for any costs, expenses, and damages which it may be obliged to pay by reason of an infringement, at any time during the prosecution or after the completion of the work.

70-04 RESTORATION OF SURFACES DISTURBED BY OTHERS. The Owner reserves the right to authorize the construction, reconstruction, or maintenance of any public or private utility service, FAA or National Oceanic and Atmospheric Administration (NOAA) facility, or a utility service of another government agency at any time during the progress of the work. To the extent that such construction, reconstruction, or maintenance has been coordinated with the Owner, such authorized work (by others) is indicated as follows:

~~Owner (Utility or Other Facility)~~
~~Location (See Plan Sheet No.)~~
~~Person to Contact (Name, Title, Address and Phone)~~

Except as listed above, the Contractor shall not permit any individual, firm, or corporation to excavate or otherwise disturb such utility services or facilities located within the limits of the work without the written permission of the Engineer.

Should the owner of the public or private utility service, FAA, or NOAA facility, or a utility service of another government agency be authorized to construct, reconstruct, or maintain such utility service or facility during the progress of the work, the Contractor shall cooperate with such owners by arranging and performing the work in this contract so as to facilitate such construction, reconstruction or maintenance by others whether or not such work by others is listed above. When ordered as extra work by the Engineer, the Contractor shall make all necessary repairs to the work which are due to such authorized work by others, unless otherwise provided for in the contract, plans, or specifications. It is understood and agreed that the Contractor shall not be entitled to make any claim for damages due to such authorized work by others or for any delay to the work resulting from such authorized work.

70-05 FEDERAL AID PARTICIPATION. For AIP contracts, the United States Government, by and through the Missouri Department of Transportation (MoDOT) as a Block Grant State, has agreed to reimburse the Owner for some portion of the contract costs. Such reimbursement is made from time to time upon the Owner's request to the MoDOT. In consideration of the United States Government's (FAA's) agreement with the Owner, the Owner has included provisions in this contract pursuant to the requirements of Title 49 of the United States Code (USC) and the Rules and Regulations of the FAA that pertain to the work.

As required by the USC, the contract work is subject to the inspection and approval of duly authorized representatives of the Administrator, FAA, and is further subject to those provisions of the rules and regulations that are cited in the contract, plans, or specifications.

No requirement of the USC, the rules and regulations implementing the USC, or this contract shall be construed as making the Federal Government a party to the contract nor will any such requirement interfere in any way with the rights of either party to the contract.

70-06 SANITARY, HEALTH, AND SAFETY PROVISIONS. The Contractor shall provide and maintain in a neat, sanitary condition such accommodations for the use of his/her employees as may be necessary to comply with the requirements of the state and local Board of Health, or of other bodies or tribunals having jurisdiction.

Attention is directed to Federal, state, and local laws, rules and regulations concerning construction safety and health standards. The Contractor shall not require any worker to work in surroundings or under conditions that are unsanitary, hazardous, or dangerous to his/her health or safety.

The contractor shall be aware of all COVID-19 guidance from the Center for Disease Control (CDC) and other government health mandates and conduct all operations in conformance with these safety directives. The guidance may change during the project construction and the contractor shall change and adapt their operation and safety protocols accordingly.

The contractor shall include these procedures in the project safety plan as called for in the contract documents and revise the safety plan as needed.

The contractor shall be aware of the Missouri Standard Specifications for Highway Construction Section 107.1 "Laws to be Observed".

70-07 PUBLIC CONVENIENCE AND SAFETY. The Contractor shall control his/her operations and those of his/her subcontractors and all suppliers to assure the least inconvenience to the traveling public. Under all circumstances, safety shall be the most important consideration.

The Contractor shall maintain the free and unobstructed movement of aircraft and vehicular traffic with respect to his/her own operations and those of his/her subcontractors and all suppliers in accordance with the subsection titled MAINTENANCE OF TRAFFIC of Section 40 hereinbefore specified and shall limit such operations for the convenience and safety of the traveling public, as specified in the subsection titled LIMITATION OF OPERATIONS of Section 80 hereinafter.

70-08 BARRICADES, WARNING SIGNS, AND HAZARD MARKINGS. The Contractor shall furnish, erect, and maintain all barricades, warning signs, and markings for hazards necessary to protect the public and the work. When used during periods of darkness, such barricades, warning signs, and hazard markings shall be suitably illuminated. Unless otherwise specified, barricades, warning signs, and markings for hazards that are in the air operations area shall be a maximum of 18 inches high. Unless otherwise specified, barricades shall be spaced not more than 25 feet apart. Barricades, warning signs, and markings shall be paid for under Section 40-05.

For vehicular and pedestrian traffic, the Contractor shall furnish, erect, and maintain barricades, warning signs, lights and other traffic control devices in reasonable conformity with the Manual of Uniform Traffic Control Devices for Streets and Highways (published by the United States Government Printing Office).

When the work requires closing an air operations area of the airport or portion of such area, the Contractor shall furnish, erect, and maintain temporary markings and associated lighting conforming to the requirements of AC 150/5340-1 (current edition), Standards for Airport Markings.

The Contractor shall furnish, erect, and maintain markings and associated lighting of open trenches, excavations, temporary stockpiles, and his/her parked construction equipment that may be hazardous to the operation of emergency fire-rescue or maintenance vehicles on the airport in reasonable conformance to AC 150/5370-2 (current edition), Operational Safety on Airports During Construction.

The Contractor shall identify each motorized vehicle or piece of construction equipment in reasonable conformance to AC 150/5370-2 (current edition).

The Contractor shall furnish and erect all barricades, warning signs, and markings for hazards prior to commencing work that requires such erection and shall maintain the barricades, warning signs, and markings for hazards until their dismantling is directed by the Engineer.

Open-flame type lights shall not be permitted within the air operations areas of the airport.

70-09 USE OF EXPLOSIVES. When the use of explosives is necessary for the prosecution of the work, the Contractor shall exercise the utmost care not to endanger life or property, including new work. The Contractor shall be responsible for all damage resulting from the use of explosives.

All explosives shall be stored in a secure manner in compliance with all laws and ordinances, and all such storage places shall be clearly marked. Where no local laws or ordinances apply, storage shall be provided satisfactory to the Engineer and, in general, not closer than 1,000 feet (300 m) from the work or from any building, road, or other place of human occupancy.

The Contractor shall notify each property owner and public utility company having structures or facilities in proximity to the site of the work of his/her intention to use explosives. Such notice shall be given sufficiently in advance to enable them to take such steps as they may deem necessary to protect their property from injury.

The use of electrical blasting caps shall not be permitted on or within 1,000 feet (300 m) of the airport property.

70-10 PROTECTION AND RESTORATION OF PROPERTY AND LANDSCAPE. The Contractor shall be responsible for the preservation of all public and private property, and shall protect carefully from disturbance or damage all land monuments and property markers until the Engineer has witnessed or otherwise referenced their location and shall not move them until directed.

The Contractor shall be responsible for all damage or injury to property of any character during the prosecution of the work resulting from any act, omission, neglect, or misconduct in his/her manner or method of executing the work or at any time due to defective work or materials, and said responsibility will not be released until the project shall have been completed and accepted.

When or where any direct or indirect damage or injury is done to public or private property by or on account of any act, omission, neglect, or misconduct in the execution of the work, or in consequence of the nonexecution thereof by the Contractor, he/she shall restore, at his/her own expense, such property to a condition similar or equal to that existing before such damage or injury was done, by repairing, or otherwise restoring as may be directed, or he/she shall make good such damage or injury in an acceptable manner.

70-11 RESPONSIBILITY FOR DAMAGE CLAIMS. The Contractor shall indemnify and save harmless the Engineer and the Owner and their officers and employees from all suits, actions, or claims of any character brought because of any injuries or damage received or sustained by any person, persons, or property on account of the operations of the Contractor; or on account of or in consequence of any neglect in safeguarding the work; or through use of unacceptable materials in constructing the work; or because of any act or omission, neglect, or misconduct of said Contractor; or because of any claims or amounts recovered from any infringements of patent, trademark, or copyright; or from any claims or amounts arising or recovered under the "Worker's Compensation Act," or any other law, ordinance, order, or decree. Money due the Contractor under and by virtue of his/her contract as may be considered necessary by the Owner for such purpose may be retained for the use of the Owner or, in case no money is due, his/her surety may be held until such suit(s), action(s), or claim(s) for injuries or damages as aforesaid shall have been settled and suitable evidence to that effect furnished to the Owner, except that money due the Contractor will not be withheld when the Contractor produces satisfactory evidence that he/she is adequately protected by public liability and property damage insurance.

70-12 THIRD PARTY BENEFICIARY CLAUSE. It is specifically agreed between the parties executing the contract that it is not intended by any of the provisions of any part of the contract to create in the public or any member thereof a third party beneficiary or to authorize anyone not a party to the contract to maintain a suit for personal injuries or property damage pursuant to the terms or provisions of the contract.

70-13 OPENING SECTIONS OF THE WORK TO TRAFFIC. Should it be necessary for the Contractor to complete portions of the contract work for the beneficial occupancy of the Owner prior to completion of the entire contract, such "phasing" of the work shall be specified herein and indicated on the plans. When so specified, the Contractor shall complete such portions of the work on or before the date specified or as otherwise specified. The Contractor shall make his/her own estimate of the difficulties involved in arranging his/her work to permit such beneficial occupancy by the Owner as described *in the plans and contract documents.* ~~below:~~

~~Phase or Description~~
~~Required Date or Sequence of Owner's Beneficial Occupancy~~
~~Work Shown on Plan Sheet~~

Upon completion of any portion of the work listed above, such portion shall be accepted by the Owner in accordance with the subsection titled PARTIAL ACCEPTANCE of Section 50.

No portion of the work may be opened by the Contractor for public use until ordered by the Engineer in writing. Should it become necessary to open a portion of the work to public traffic on a temporary or intermittent basis, such openings shall be made when, in the opinion of the Engineer, such portion of the work is in an acceptable condition to support the intended traffic. Temporary or intermittent openings are considered to be inherent in the work and shall not constitute either acceptance of the portion of the work so opened or a waiver of any provision of the contract. Any damage to the portion of the work so opened that is not attributable to traffic which is permitted by the Owner shall be repaired by the Contractor at his/her expense.

The Contractor shall make his/her own estimate of the inherent difficulties involved in completing the work under the conditions herein described and shall not claim any added compensation by reason of delay or increased cost due to opening a portion of the contract work.

Contractor shall be required to conform to safety standards contained AC 150/5370-2, Operational Safety on Airports During Construction (See Special Provisions.)

Contractor shall refer to the approved safety plan to identify barricade requirements and other safety requirements prior to opening up sections of work to traffic.

70-14 CONTRACTOR'S RESPONSIBILITY FOR WORK. Until the Engineer's final written acceptance of the entire completed work, excepting only those portions of the work accepted in accordance with the subsection titled PARTIAL ACCEPTANCE of Section 50, the Contractor shall have the charge and care thereof and shall take every precaution against injury or damage to any part due to the action of the elements or from any other cause, whether arising from the execution or from the non-execution of the work. The Contractor shall rebuild, repair, restore, and make good all injuries or damages to any portion of the work occasioned by any of the above causes before final acceptance and shall bear the expense thereof, except for damage to the work due to unforeseeable causes beyond the control of and without the fault or negligence of the Contractor, including but not restricted to acts of God such as earthquake, tidal wave, tornado, hurricane or other cataclysmic phenomenon of nature, or acts of the public enemy or of government authorities.

If the work is suspended for any cause whatsoever, the Contractor shall be responsible for the work and shall take such precautions necessary to prevent damage to the work. The Contractor shall provide for normal drainage and shall erect necessary temporary structures, signs, or other facilities at his/her expense. During such period of suspension of work, the Contractor shall properly and continuously maintain in an acceptable growing condition all living material in newly established planting, seedings, and soddings furnished under his/her contract, and shall take adequate precautions to protect new tree growth and other important vegetative growth against injury.

70-15 CONTRACTOR'S RESPONSIBILITY FOR UTILITY SERVICE AND FACILITIES OF OTHERS. As provided in the subsection titled RESTORATION OF SURFACES DISTURBED BY OTHERS of this section, the Contractor shall cooperate with the owner of any public or private utility service, FAA or NOAA, or a utility service of another governmental agency that may be authorized by the Owner to construct, reconstruct or maintain such utility services or facilities during the progress of the work. In addition, the Contractor shall control his/her operations to prevent the unscheduled interruption of such utility services and facilities.

To the extent that such public or private utility services, FAA, or NOAA facilities, or utility services of another governmental agency are known to exist within the limits of the contract work, the approximate locations have been indicated on the plans and the owners are indicated as follows:

Utility Service	Person to Contract	Emergency Phone Number
City of Clinton, MO	Christy Maggi, City Administrator	660-885-6121
Clinton Regional Airport	Wallace White	660-885-8889
Other Utility Services	Missouri One Call System	1-800-344-7483

It is understood and agreed that the Owner does not guarantee the accuracy or the completeness of the location information relating to existing utility services, facilities, or structures that may be shown on the plans or encountered in the work. Any inaccuracy or omission in such information shall not relieve the Contractor of his/her responsibility to protect such existing features from damage or unscheduled interruption of service.

It is further understood and agreed that the Contractor shall, upon execution of the contract, notify the owners of all utility services or other facilities of his/her plan of operations. Such notification shall be in writing addressed to THE PERSON TO CONTACT as provided hereinbefore in this subsection and the subsection titled RESTORATION OF SURFACES DISTURBED BY OTHERS of this section. A copy of each notification shall be given to the Engineer.

In addition to the general written notification hereinbefore provided, it shall be the responsibility of the Contractor to keep such individual owners advised of changes in his/her plan of operations that would affect such owners.

Prior to commencing the work in the general vicinity of an existing utility service or facility, the Contractor shall again notify each such owner of his/her plan of operation. If, in the Contractor's opinion, the owner's assistance is needed to locate the utility service or facility or the presence of a representative of the owner is desirable to observe the work, such advice should be included in the notification. Such notification shall be given by the most expeditious means to reach the utility owner's PERSON TO CONTACT no later than two normal business days prior to the Contractor's commencement of operations in such general vicinity. The Contractor shall furnish a written summary of the notification to the Engineer.

The Contractor's failure to give the two days' notice hereinabove provided shall be cause for the Owner to suspend the Contractor's operations in the general vicinity of a utility service or facility.

Where the outside limits of an underground utility service have been located and staked on the ground, the Contractor shall be required to use excavation methods acceptable to the Engineer within 3 feet (90 cm) of such outside limits at such points as may be required to ensure protection from damage due to the Contractor's operations.

Should the Contractor damage or interrupt the operation of a utility service or facility by accident or otherwise, he/she shall immediately notify the proper authority and the Engineer and shall take all reasonable measures to prevent further damage or interruption of service. The Contractor, in such events, shall cooperate with the utility service or facility owner and the Engineer continuously until such damage has been repaired and service restored to the satisfaction of the utility or facility owner.

The Contractor shall bear all costs of damage and restoration of service to any utility service or facility due to his/her operations whether or not due to negligence or accident. The Owner reserves the right to deduct such costs from any monies due or which may become due the Contractor, or his/her surety.

70-16 FURNISHING RIGHTS-OF-WAY. The Owner will be responsible for furnishing all rights-of-way upon which the work is to be constructed in advance of the Contractor's operations.

70-17 PERSONAL LIABILITY OF PUBLIC OFFICIALS. In carrying out any of the contract provisions or in exercising any power or authority granted to him by this contract, there shall be no liability upon the Engineer, his/her authorized representatives, or any officials of the Owner either personally or as an official of the Owner. It is understood that in such matters they act solely as agents and representatives of the Owner.

70-18 NO WAIVER OF LEGAL RIGHTS. Upon completion of the work, the Owner will expeditiously make final inspection and notify the Contractor of final acceptance. Such final acceptance, however, shall not preclude or stop the Owner from correcting any measurement, estimate, or certificate made before or after completion of the work, nor shall the Owner be precluded or stopped from recovering from the Contractor or his/her surety, or both, such overpayment as may be sustained, or by failure on the part of the Contractor to fulfill his/her obligations under the contract. A waiver on the part of the Owner of any breach of any part of the contract shall not be held to be a waiver of any other or subsequent breach.

The Contractor, without prejudice to the terms of the contract, shall be liable to the Owner for latent defects, fraud, or such gross mistakes as may amount to fraud, or as regards the owner's rights under any warranty or guaranty.

70-19 ENVIRONMENTAL PROTECTION. The Contractor shall comply with all Federal, state, and local laws and regulations controlling pollution of the environment. He shall take necessary precautions to prevent pollution of streams, lakes, ponds, and reservoirs with fuels, oils, bitumens, chemicals, or other harmful materials and to prevent pollution of the atmosphere from particulate and gaseous matter.

70-20 ARCHAEOLOGICAL AND HISTORICAL FINDINGS. Unless otherwise specified in this subsection, the Contractor is advised that the site of the work is not within any property, district, or site, and does not contain any building, structure, or object listed in the current National Register of Historic Places published by the United States Department of Interior.

Should the Contractor encounter, during his/her operations, any building, part of a building, structure, or object that is incongruous with its surroundings, he shall immediately cease operations in that location and notify the

Engineer. The Engineer will immediately investigate the Contractor's finding, and the Owner will direct the Contractor to either resume his/her operations or to suspend operations as directed.

Should the Owner order suspension of the Contractor's operations in order to protect an archaeological or historical finding, or order the Contractor to perform extra work, such shall be covered by an appropriate contract modification (change order or supplemental agreement) as provided in the subsection titled EXTRA WORK of Section 40 and the subsection titled PAYMENT FOR EXTRA WORK AND FORCE ACCOUNT WORK of Section 90. If appropriate, the contract modification shall include an extension of contract time in accordance with the subsection titled DETERMINATION AND EXTENSION OF CONTRACT TIME of Section 80.

END OF SECTION 70

SECTION 80
PROSECUTION AND PROGRESS

80-01 SUBLETTING OF CONTRACT. The Owner will not recognize any subcontractor on the work. The Contractor shall at all times when work is in progress be represented either in person by a qualified superintendent, or by another designated, qualified representative who is duly authorized to receive and execute orders of the Engineer.

Should the Contractor elect to assign his/her contract, said assignment shall be concurred in by the surety, shall be presented for the consideration and approval of the Owner, and shall be consummated only on the written approval of the Owner. In case of approval, the Contractor shall file copies of all subcontracts with the Engineer.

The Contractor shall perform, with his organization, an amount of work equal to at least **twenty-five (25%)** percent of the total contract cost.

80-02 NOTICE TO PROCEED. The notice to proceed shall state the date on which it is expected the Contractor will begin the construction and from which date contract time will be charged. The Contractor shall begin the work to be performed under the contract within 10 days of the date set by the Engineer in the written notice to proceed, but in any event, the Contractor shall notify the Engineer at least 24 hours in advance of the time actual construction operations will begin.

80-03 PROSECUTION AND PROGRESS. Unless otherwise specified, the Contractor shall submit his/her progress schedule for the Engineer's approval within 10 days after the effective date of the notice to proceed. The Contractor's progress schedule, when approved by the Engineer, may be used to establish major construction operations and to check on the progress of the work. The Contractor shall provide sufficient materials, equipment, and labor to guarantee the completion of the project in accordance with the plans and specifications within the time set forth in the proposal.

If the Contractor falls significantly behind the submitted schedule, the Contractor shall, upon the Engineer's request, submit a revised schedule for completion of the work within the contract time and modify his/her operations to provide such additional materials, equipment, and labor necessary to meet the revised schedule. Should the prosecution of the work be discontinued for any reason, the Contractor shall notify the Engineer at least 24 hours in advance of resuming operations.

For AIP contracts, the Contractor shall not commence any actual construction prior to the date on which the notice to proceed is issued by the Owner.

80-04 LIMITATION OF OPERATIONS. The Contractor shall control his/her operations and the operations of his/her subcontractors and all suppliers so as to provide for the free and unobstructed movement of aircraft in the AIR OPERATION AREAS (AOA) of the airport.

When the work requires the Contractor to conduct his/her operations within an AIR OPERATIONS AREA of the airport, the work shall be coordinated with airport operations (through the Engineer) at least 48 hours prior to commencement of such work. The Contractor shall not close an AIR OPERATIONS AREA until so authorized by the Engineer and until the necessary temporary marking and associated lighting is in place as provided in the subsection titled BARRICADES, WARNING SIGNS, AND HAZARD MARKINGS of Section 70.

When the contract work requires the Contractor to work within an AIR OPERATIONS AREA of the airport on an intermittent basis (intermittent opening and closing of the AIR OPERATIONS AREA), the Contractor shall maintain constant communications as hereinafter specified; immediately obey all instructions to vacate the AIR OPERATIONS AREA; and immediately obey all instructions to resume work in such AIR OPERATIONS AREA. Failure to maintain the specified communications or to obey instructions shall be cause for suspension of the Contractor's operations in the AIR OPERATIONS AREA until the satisfactory conditions are provided. *See the Construction Safety and Phasing Plan for details.* ~~The following AIR OPERATIONS AREA cannot be closed to operating aircraft to permit the Contractor's operations on a continuous basis and will therefore be closed to aircraft operations intermittently as follows:~~

~~AOA~~
~~TIME PERIODS AOA CAN BE CLOSED~~
~~TYPE OF COMMUNICATIONS REQUIRED WHEN WORKING IN AN AOA~~

~~CONTROL AUTHORITY~~

Contractor shall be required to conform to safety standards contained in AC 150/5370-2, Operational Safety on Airports During Construction (See Special Provisions).

80-04.1 OPERATIONAL SAFETY ON AIRPORT DURING CONSTRUCTION. All Contractors' operations shall be conducted in accordance with the project safety plan and the provisions set forth within the current version of Advisory Circular 150/5370-2. The safety plan included within the contract documents conveys minimum requirements for operational safety on the airport during construction activities. The Contractor shall prepare and submit a plan that details how it proposes to comply with the requirements presented within the safety plan.

The Contractor shall implement all necessary safety plan measures prior to commencement of any work activity. The Contractor shall conduct routine checks of the safety plan measures to assure compliance with the safety plan measures.

The Contractor is responsible to the Owner for the conduct of all subcontractors it employs on the project. The Contractor shall assure that all subcontractors are made aware of the requirements of the safety plan and that they implement and maintain all necessary measures.

No deviation or modifications may be made to the approved safety plan unless approved in writing by the Owner or Engineer.

80-05 CHARACTER OF WORKERS, METHODS, AND EQUIPMENT. The Contractor shall, at all times, employ sufficient labor and equipment for prosecuting the work to full completion in the manner and time required by the contract, plans, and specifications.

All workers shall have sufficient skill and experience to perform properly the work assigned to them. Workers engaged in special work or skilled work shall have sufficient experience in such work and in the operation of the equipment required to perform the work satisfactorily.

Any person employed by the Contractor or by any subcontractor who violates any operational regulations and, in the opinion of the Engineer, does not perform his/her work in a proper and skillful manner or is intemperate or disorderly shall, at the written request of the Engineer, be removed forthwith by the Contractor or subcontractor employing such person, and shall not be employed again in any portion of the work without approval of the Engineer.

Should the Contractor fail to remove such person or persons, or fail to furnish suitable and sufficient personnel for the proper prosecution of the work, the Engineer may suspend the work by written notice until compliance with such orders.

All equipment that is proposed to be used on the work shall be of sufficient size and in such mechanical condition as to meet requirements of the work and to produce a satisfactory quality of work. Equipment used on any portion of the work shall be such that no injury to previously completed work, adjacent property, or existing airport facilities will result from its use.

When the methods and equipment to be used by the Contractor in accomplishing the work are not prescribed in the contract, the Contractor is free to use any methods or equipment that will accomplish the work in conformity with the requirements of the contract, plans, and specifications.

When the contract specifies the use of certain methods and equipment, such methods and equipment shall be used unless others are authorized by the Engineer. If the Contractor desires to use a method or type of equipment other than specified in the contract, he/she may request authority from the Engineer to do so. The request shall be in writing and shall include a full description of the methods and equipment proposed and of the reasons for desiring to make the change. If approval is given, it will be on the condition that the Contractor will be fully responsible for producing work in conformity with contract requirements. If, after trial use of the substituted methods or equipment, the Engineer determines that the work produced does not meet contract requirements, the Contractor shall discontinue the use of the substitute method or equipment and shall complete the remaining work with the specified methods and equipment. The Contractor shall remove any deficient work and replace it with work of specified quality, or take such other corrective action as the Engineer may direct. No change will be made in basis of payment for the contract items involved nor in contract time as a result of authorizing a change in methods or equipment under this subsection.

80-06 TEMPORARY SUSPENSION OF THE WORK. The Owner shall have the authority to suspend the work wholly or in part for such period or periods as he/she may deem necessary, due to unsuitable weather, or such other conditions as are considered unfavorable for the prosecution of the work, or for such time as is necessary due to the failure on the part of the Contractor to carry out orders given or perform any or all provisions of the contract.

In the event that the Contractor is ordered by the Owner, in writing, to suspend work for some unforeseen cause not otherwise provided for in the contract and over which the Contractor has no control, the Contractor may be reimbursed for actual money expended on the work during the period of shutdown. No allowance will be made for anticipated profits. The period of shutdown shall be computed from the effective date of the Engineer's order to suspend work to the effective date of the Engineer's order to resume the work. Claims for such compensation shall be filed with the Engineer within the time period stated in the Engineer's order to resume work. The Contractor shall submit with his/her claim information substantiating the amount shown on the claim. The Engineer will forward the Contractor's claim to the Owner for consideration in accordance with local laws or ordinances. No provision of this article shall be construed as entitling the Contractor to compensation for delays due to inclement weather, for suspensions made at the request of the Owner, or for any other delay provided for in the contract, plans, or specifications.

If it should become necessary to suspend work for an indefinite period, the Contractor shall store all materials in such manner that they will not become an obstruction nor become damaged in any way. He shall take every precaution to prevent damage or deterioration of the work performed and provide for normal drainage of the work. The Contractor shall erect temporary structures where necessary to provide for traffic on, to, or from the airport.

80-07 DETERMINATION AND EXTENSION OF CONTRACT TIME. The number of calendar or working days allowed for completion of the work shall be stated in the proposal and contract and shall be known as the CONTRACT TIME.

Should the contract time require extension for reasons beyond the Contractor's control, it shall be adjusted as follows:

a. CONTRACT TIME based on WORKING DAYS shall be calculated weekly by the Engineer. The Engineer will furnish the Contractor a copy of his/her weekly statement of the number of working days charged against the contract time during the week and the number of working days currently specified for completion of the contract (the original contract time plus the number of working days, if any, that have been included in approved CHANGE ORDERS or SUPPLEMENTAL AGREEMENTS covering EXTRA WORK).

The Engineer shall base his/her weekly statement of contract time charged on the following considerations:

(1) No time shall be charged for days on which the Contractor is unable to proceed with the principal item of work under construction at the time for at least 6 hours with the normal work force employed on such principal item. Should the normal work force be on a double-shift, 12 hours shall be used. Should the normal work force be on a triple-shift, 18 hours shall apply. Conditions beyond the Contractor's control such as strikes, lockouts, unusual delays in transportation, temporary suspension of the principal item of work under construction or temporary suspension of the entire work which have been ordered by the Owner for reasons not the fault of the Contractor, shall not be charged against the contract time.

(2) The Engineer will not make charges against the contract time prior to the effective date of the notice to proceed.

(3) The Engineer will begin charges against the contract time on the first working day after the effective date of the notice to proceed.

(4) The Engineer will not make charges against the contract time after the date of final acceptance as defined in the subsection titled FINAL ACCEPTANCE of Section 50.

(5) The Contractor will be allowed 1 week in which to file a written protest setting forth his/her objections to the Engineer's weekly statement. If no objection is filed within such specified time, the weekly statement shall be considered as acceptable to the Contractor.

The contract time (stated in the proposal) is based on the originally estimated quantities as described in the subsection titled INTERPRETATION OF ESTIMATED PROPOSAL QUANTITIES of Section 20. Should the satisfactory

completion of the contract require performance of work in greater quantities than those estimated in the proposal, the contract time shall be increased in the same proportion as the cost of the actually completed quantities bears to the cost of the originally estimated quantities in the proposal. Such increase in contract time shall not consider either the cost of work or the extension of contract time that has been covered by change order or supplemental agreement and shall be made at the time of final payment.

b. CONTRACT TIME based on CALENDAR DAYS shall consist of the number of calendar days stated in the contract counting from the effective date of the notice to proceed and including all Saturdays, Sundays, holidays, and nonwork days. All calendar days elapsing between the effective dates of the Owner's orders to suspend and resume all work, due to causes not the fault of the Contractor, shall be excluded.

At the time of final payment, the contract time shall be increased in the same proportion as the cost of the actually completed quantities bears to the cost of the originally estimated quantities in the proposal. Such increase in the contract time shall not consider either cost of work or the extension of contract time that has been covered by a change order or supplemental agreement. Charges against the contract time will cease as of the date of final acceptance.

c. When the contract time is a specified completion date, it shall be the date on which all contract work shall be based on the final completion date.

If the Contractor finds it impossible for reasons beyond his/her control to complete the work within the contract time as specified, or as extended in accordance with the provisions of this subsection, he/she may, at any time prior to the expiration of the contract time as extended, make a written request to the Engineer for an extension of time setting forth the reasons which he/she believes will justify the granting of his/her request. Requests for extension of time on calendar day projects, caused by inclement weather, shall be supported with National Weather Bureau data showing the actual amount of inclement weather exceeded which could normally be expected during the contract period. The Contractor's plea that insufficient time was specified is not a valid reason for extension of time. If the Engineer finds that the work was delayed because of conditions beyond the control and without the fault of the Contractor, he/she may extend the time for completion in such amount as the conditions justify. The extended time for completion shall then be in full force and effect, the same as though it were the original time for completion.

80-08 FAILURE TO COMPLETE ON TIME. For each calendar day or working day, as specified in the contract, that any work remains uncompleted after the contract time (including all extensions and adjustments as provided in the subsection titled DETERMINATION AND EXTENSION OF CONTRACT TIME of this Section), the sum specified in the contract and proposal as liquidated damages will be deducted from any money due or to become due the Contractor or his/her surety. Such deducted sums shall not be deducted as a penalty but shall be considered as liquidation of a reasonable portion of damages, including but not limited to, additional engineering services that will be incurred by the Owner should the Contractor fail to complete the work in the time provided in his/her contract.

DESCRIPTION	LIQUIDATED DAMAGES COST	ALLOWED CONSTRUCTION TIME
Base Bid	$1,000 / Calendar Day	60 Calendar Days
Additive Alternate 1	$1,000 / Calendar Day	30 Calendar Days

Permitting the Contractor to continue and finish the work or any part of it after the time fixed for its completion, or after the date to which the time for completion may have been extended, will in no way operate as a waiver on the part of the Owner of any of its rights under the contract.

80-09 DEFAULT AND TERMINATION OF CONTRACT. The Contractor shall be considered in default of his/her contract, and such default will be considered as cause for the Owner to terminate the contract for any of the following reasons if the Contractor:

a. Fails to begin the work under the contract within the time specified in the "Notice to Proceed," or

b. Fails to perform the work or fails to provide sufficient workers, equipment or materials to assure completion of work in accordance with the terms of the contract, or

c. Performs the work unsuitably or neglects or refuses to remove materials or to perform anew such work as may be rejected as unacceptable and unsuitable, or

d. Discontinues the prosecution of the work, or

e. Fails to resume work which has been discontinued within a reasonable time after notice to do so, or

f. Becomes insolvent or is declared bankrupt, or commits any act of bankruptcy or insolvency, or

g. Allows any final judgment to stand against him/her unsatisfied for a period of 10 days, or

h. Makes an assignment for the benefit of creditors, or

i. For any other cause whatsoever, fails to carry on the work in an acceptable manner.

Should the Engineer consider the Contractor in default of the contract for any reason hereinbefore, he/she shall immediately give written notice to the Contractor and the Contractor's surety as to the reasons for considering the Contractor in default and the Owner's intentions to terminate the contract.

If the Contractor or surety, within a period of 10 days after such notice, does not proceed in accordance therewith, then the Owner will, upon written notification from the Engineer of the facts of such delay, neglect, or default and the Contractor's failure to comply with such notice, have full power and authority without violating the contract to take the prosecution of the work out of the hands of the Contractor. The Owner may appropriate or use any or all materials and equipment that have been mobilized for use in the work and are acceptable and may enter into an agreement for the completion of said contract according to the terms and provisions thereof, or use such other methods as in the opinion of the Engineer will be required for the completion of said contract in an acceptable manner.

All costs and charges incurred by the Owner, together with the cost of completing the work under contract, will be deducted from any monies due or which may become due the Contractor. If such expense exceeds the sum which would have been payable under the contract, then the Contractor and the surety shall be liable and shall pay to the Owner the amount of such excess.

80-10 TERMINATION FOR NATIONAL EMERGENCIES. The Owner shall terminate the contract or portion thereof by written notice when the Contractor is prevented from proceeding with the construction contract as a direct result of an Executive Order of the President with respect to the prosecution of war or in the interest of national defense.

When the contract, or any portion thereof, is terminated before completion of all items of work in the contract, payment will be made for the actual number of units or items of work completed at the contract price or as mutually agreed for items of work partially completed or not started. No claims or loss of anticipated profits shall be considered.

Reimbursement for organization of the work and other overhead expenses (when not otherwise included in the contract), and moving equipment and materials to and from the job will be considered, the intent being that an equitable settlement will be made with the Contractor.

Acceptable materials obtained or ordered by the Contractor for the work that are not incorporated in the work shall, at the option of the Contractor, be purchased from the Contractor at actual cost as shown by receipted bills and actual cost records at such points of delivery as may be designated by the Engineer.

Termination of the contract or a portion thereof shall neither relieve the Contractor of his/her responsibilities for the completed work nor shall it relieve his/her surety of its obligation for and concerning any just claim arising out of the work performed.

80-11 WORK AREA, STORAGE AREA, AND SEQUENCE OF OPERATIONS. The Contractor shall obtain approval from the Engineer prior to beginning any work in all areas of the airport. No operating runway, taxiway, or Air Operations Area (AOA) shall be crossed, entered, or obstructed while it is operational. The Contractor shall plan and coordinate his/her work in such a manner as to insure safety and a minimum of hindrance to flight operations. All Contractor equipment and material stockpiles shall be stored a minimum of **200** feet from the centerline of an active runway. No equipment will be allowed to park within the approach area of an active runway at any time. No equipment shall be within **175** feet of an active runway at any time.

END OF SECTION 80

SECTION 90
MEASUREMENT AND PAYMENT

90-01 MEASUREMENT OF QUANTITIES. All work completed under the contract will be measured by the Engineer, or his/her authorized representatives, using United States Customary Units of Measurement or the International System of Units.

The method of measurement and computations to be used in determination of quantities of material furnished and of work performed under the contract will be those methods generally recognized as conforming to good engineering practice.

Unless otherwise specified, longitudinal measurements for area computations will be made horizontally, and no deductions will be made for individual fixtures (or leave-outs) having an area of 9 square feet (0.8 square meters) or less. Unless otherwise specified, transverse measurements for area computations will be the neat dimensions shown on the plans or ordered in writing by the Engineer.

Structures will be measured according to neat lines shown on the plans or as altered to fit field conditions.

Unless otherwise specified, all contract items which are measured by the linear foot such as electrical ducts, conduits, pipe culverts, underdrains, and similar items shall be measured parallel to the base or foundation upon which such items are placed.

In computing volumes of excavation, the average end area method or other acceptable methods will be used.

The thickness of plates and galvanized sheet used in the manufacture of corrugated metal pipe, metal plate pipe culverts and arches, and metal cribbing will be specified and measured in decimal fraction of inches.

The term "ton" will mean the short ton consisting of 2,000 pounds (907 kilograms) avoirdupois. All materials that are measured or proportioned by weights shall be weighed on accurate, approved scales by competent, qualified personnel at locations designed by the Engineer. If material is shipped by rail, the car weight may be accepted provided that only the actual weight of material is paid for. However, car weights will not be acceptable for material to be passed through mixing plants. Trucks used to haul material being paid for by weight shall be weighed empty daily at such times as the Engineer directs, and each truck shall bear a plainly legible identification mark.

Materials to be measured by volume in the hauling vehicle shall be hauled in approved vehicles and measured therein at the point of delivery. Vehicles for this purpose may be of any size or type acceptable to the Engineer, provided that the body is of such shape that the actual contents may be readily and accurately determined. All vehicles shall be loaded to at least their water level capacity, and all loads shall be leveled when the vehicles arrive at the point of delivery.

When requested by the Contractor and approved by the Engineer in writing, material specified to be measured by the cubic yard (cubic meter) may be weighed, and such weights will be converted to cubic yards (cubic meters) for payment purposes. Factors for conversion from weight measurement to volume measurement will be determined by the Engineer and shall be agreed to by the Contractor before such method of measurement of pay quantities is used.

Bituminous materials will be measured by the gallon (liter) or ton (kilogram). When measured by volume, such volumes will be measured at 60 F (15 C) or will be corrected to the volume at 60 F (15 C) using ASTM D 1250 for asphalts or ASTM D 633 for tars.

Net certified scale weights or weights based on certified volumes in the case of rail shipments will be used as a basis of measurement, subject to correction when bituminous material has been lost from the car or the distributor, wasted, or otherwise not incorporated in the work.

When bituminous materials are shipped by truck or transport, net certified weights by volume, subject to correction for loss or foaming, may be used for computing quantities.

Cement will be measured by the ton (kilogram) or hundredweight (kilogram).

Timber will be measured by the thousand feet board measure (M.F.B.M.) actually incorporated in the structure. Measurement will be based on nominal widths and thicknesses and the extreme length of each piece.

The term "lump sum" when used as an item of payment will mean complete payment for the work described in the contract.

When a complete structure or structural unit (in effect, "lump sum" work) is specified as the unit of measurement, the unit will be construed to include all necessary fittings and accessories.

Rental of equipment will be measured by time in hours of actual working time and necessary traveling time of the equipment within the limits of the work. Special equipment ordered by the Engineer in connection with force account work will be measured as agreed in the change order or supplemental agreement authorizing such force account work as provided in the subsection titled PAYMENT FOR EXTRA AND FORCE ACCOUNT WORK of this section.

When standard manufactured items are specified such as fence, wire, plates, rolled shapes, pipe conduit, etc., and these items are identified by gage, unit weight, section dimensions, etc., such identification will be considered to be nominal weights or dimensions. Unless more stringently controlled by tolerances in cited specifications, manufacturing tolerances established by the industries involved will be accepted.

Scales for weighing materials which are required to be proportioned or measured and paid for by weight shall be furnished, erected, and maintained by the Contractor, or be certified permanently installed commercial scales.

Scales shall be accurate within one-half of 1 percent of the correct weight throughout the range of use. The Contractor shall have the scales checked under the observation of the inspector before beginning work and at such other times as requested. The intervals shall be uniform in spacing throughout the graduated or marked length of the beam or dial and shall not exceed one-tenth of 1 percent of the nominal rated capacity of the scale, but not less than 1 pound (454 grams). The use of spring balances will not be permitted.

Beams, dials, platforms, and other scale equipment shall be so arranged that the operator and the inspector can safely and conveniently view them.

Scale installations shall have available ten standard 50-pound (2.3 kilogram) weights for testing the weighing equipment or suitable weights and devices for other approved equipment.

Scales must be tested for accuracy and serviced before use at a new site. Platform scales shall be installed and maintained with the platform level and rigid bulkheads at each end.

Scales "overweighing" (indicating more than correct weight) will not be permitted to operate, and all materials received subsequent to the last previous correct weighting-accuracy test will be reduced by the percentage of error in excess of one-half of 1 percent.

In the event inspection reveals the scales have been "underweighing" (indicating less than correct weight), they shall be adjusted, and no additional payment to the Contractor will be allowed for materials previously weighed and recorded.

All costs in connection with furnishing, installing, certifying, testing, and maintaining scales; for furnishing check weights and scale house; and for all other items specified in this subsection, for the weighing of materials for proportioning or payment, shall be included in the unit contract prices for the various items of the project.

When the estimated quantities for a specific portion of the work are designated as the pay quantities in the contract, they shall be the final quantities for which payment for such specific portion of the work will be made, unless the dimensions of said portions of the work shown on the plans are revised by the Engineer. If revised dimensions result in an increase or decrease in the quantities of such work, the final quantities for payment will be revised in the amount represented by the authorized changes in the dimensions.

90-02 SCOPE OF PAYMENT. The Contractor shall receive and accept compensation provided for in the contract as full payment for furnishing all materials, for performing all work under the contract in a complete and acceptable manner, and for all risk, loss, damage, or expense of whatever character arising out of the nature of the work or the prosecution thereof, subject to the provisions of the subsection titled NO WAIVER OF LEGAL RIGHTS of Section 70.

When the "basis of payment" subsection of a technical specification requires that the contract price (price bid) include compensation for certain work or material essential to the item, this same work or material will not also be measured for payment under any other contract item which may appear elsewhere in the contract, plans, or specifications.

90-03 COMPENSATION FOR ALTERED QUANTITIES. When the accepted quantities of work vary from the quantities in the proposal, the Contractor shall accept as payment in full, so far as contract items are concerned, payment at the original contract price for the accepted quantities of work actually completed and accepted. No allowance, except as provided for in the subsection titled ALTERATION OF WORK AND QUANTITIES of Section 40 will be made for any increased expense, loss of expected reimbursement, or loss of anticipated profits suffered or claimed by the Contractor which results directly from such alterations or indirectly from his/her unbalanced allocation of overhead and profit among the contract items, or from any other cause.

90-04 PAYMENT FOR OMITTED ITEMS. As specified in the subsection titled OMITTED ITEMS of Section 40, the Engineer shall have the right to omit from the work (order nonperformance) any contract item, except major contract items, in the best interest of the Owner.

Should the Engineer omit or order nonperformance of a contract item or portion of such item from the work, the Contractor shall accept payment in full at the contract prices for any work actually completed and acceptable prior to the Engineer's order to omit or nonperform such contract item.

Acceptable materials ordered by the Contractor or delivered on the work prior to the date of the Engineer's order will be paid for at the actual cost to the Contractor and shall thereupon become the property of the Owner.

In addition to the reimbursement hereinbefore provided, the Contractor shall be reimbursed for all actual costs incurred for the purpose of performing the omitted contract item prior to the date of the Engineer's order. Such additional costs incurred by the Contractor must be directly related to the deleted contract item and shall be supported by certified statements by the Contractor as to the nature the amount of such costs.

90-05 PAYMENT FOR EXTRA AND FORCE ACCOUNT WORK. Extra work, performed in accordance with the subsection titled EXTRA WORK of Section 40, will be paid for at the contract prices or agreed prices specified in the change order or supplemental agreement authorizing the extra work. When the change order or supplemental agreement authorizing the extra work requires that it be done by force account, such force account shall be measured and paid for based on expended labor, equipment, and materials plus a negotiated and agreed upon allowance for overhead and profit.

a. Miscellaneous. No additional allowance will be made for general superintendence, the use of small tools, or other costs for which no specific allowance is herein provided.

b. Comparison of Record. The Contractor and the Engineer shall compare records of the cost of force account work at the end of each day. Agreement shall be indicated by signature of the Contractor and the Engineer or their duly authorized representatives.

c. Statement. No payment will be made for work performed on a force account basis until the Contractor has furnished the Engineer with duplicate itemized statements of the cost of such force account work detailed as follows:

(1) Name, classification, date, daily hours, total hours, rate and extension for each laborer and foreman.

(2) Designation, dates, daily hours, total hours, rental rate, and extension for each unit of machinery and equipment.

(3) Quantities of materials, prices, and extensions.

(4) Transportation of materials.

(5) Cost of property damage, liability and worker's compensation insurance premiums, unemployment insurance contributions, and social security tax.

Statements shall be accompanied and supported by a receipted invoice for all materials used and transportation charges. However, if materials used on the force account work are not specifically purchased for such work but are taken from the Contractor's stock, then in lieu of the invoices the Contractor shall furnish an affidavit certifying that such materials were taken from his/her stock, that the quantity claimed was actually used, and that the price and transportation claimed represent the actual cost to the Contractor.

90-06 PARTIAL PAYMENTS. Partial payments will be made at least once each month as the work progresses. Said payments will be based upon estimates prepared by the Engineer of the value of the work performed and materials complete in place in accordance with the contract, plans, and specifications. Such partial payments may also include the delivered actual cost of those materials stockpiled and stored in accordance with the subsection titled PAYMENT FOR MATERIALS ON HAND of this section.

No partial payment will be made when the amount due the Contractor since the last estimate amounts to less than five hundred dollars.

From the total of the amount determined to be payable on a partial payment, 5 percent of such total amount will be deducted and retained by the Owner until the final payment is made, except as may be provided (at the Contractor's option) in the subsection titled PAYMENT OF WITHHELD FUNDS of this section. The balance (95 percent) of the amount payable, less all previous payments, shall be certified for payment. Should the Contractor exercise his/her option, as provided in the subsection titled PAYMENT OF WITHHELD FUNDS of this section, no such 5 percent retainage shall be deducted.

When not less than 95 percent of the work has been completed, the Engineer may, at the Owner's discretion and with the consent of the surety, prepare an estimate from which will be retained an amount not less than twice the contract value or estimated cost, whichever is greater, of the work remaining to be done. The remainder, less all previous payments and deductions, will then be certified for payment to the Contractor.

It is understood and agreed that the Contractor shall not be entitled to demand or receive partial payment based on quantities of work in excess of those provided in the proposal or covered by approved change orders or supplemental agreements, except when such excess quantities have been determined by the Engineer to be a part of the final quantity for the item of work in question.

No partial payment shall bind the Owner to the acceptance of any materials or work in place as to quality or quantity. All partial payments are subject to correction at the time of final payment as provided in the subsection titled ACCEPTANCE AND FINAL PAYMENT of this section.

The Contractor shall deliver to the Owner a complete release of all claims for labor and material arising out of this contract before the final retained percentage or final payment is made. If any subcontractor or supplier fails to furnish such a release in full, the Contractor may furnish a bond or other collateral satisfactory to the Owner to indemnify the Owner against any potential lien or other such claim. The bond or collateral shall include all costs, expenses, and attorney fees the Owner may be compelled to pay in discharging any such lien or claim.

90-07 PAYMENT FOR MATERIALS ON HAND. Partial payments may be made to the extent of the delivered cost of materials to be incorporated in the work, provided that such materials meet the requirements of the contract, plans, and specifications and are delivered to acceptable sites on the airport property or at other sites in the vicinity that are acceptable to the Owner. Such delivered costs of stored or stockpiled materials may be included in the next partial payment after the following conditions are met:

a. The material has been stored or stockpiled in a manner acceptable to the Engineer at or on an approved site.

b. The Contractor has furnished the Engineer with acceptable evidence of the quantity and quality of such stored or stockpiled materials.

c. The Contractor has furnished the Engineer with satisfactory evidence that the material and transportation costs have been paid.

d. The Contractor has furnished the Owner legal title (free of liens or encumbrances of any kind) to the material so stored or stockpiled.

e. The Contractor has furnished the Owner evidence that the material so stored or stockpiled is insured against loss by damage to or disappearance of such materials at any time prior to use in the work.

It is understood and agreed that the transfer of title and the Owner's payment for such stored or stockpiled materials shall in no way relieve the Contractor of his/her responsibility for furnishing and placing such materials in accordance with the requirements of the contract, plans, and specifications.

In no case will the amount of partial payments for materials on hand exceed the contract price for such materials or the contract price for the contract item in which the material is intended to be used.

No partial payment will be made for stored or stockpiled living or perishable plant materials.

The Contractor shall bear all costs associated with the partial payment of stored or stockpiled materials in accordance with the provisions of this subsection.

90-08 PAYMENT OF WITHHELD FUNDS. Not Used. ~~At the Contractor's option, he/she may request that the Owner accept (in lieu of the 5 percent retainage on partial payments described in the subsection titled PARTIAL PAYMENTS of this section) the Contractor's deposits in escrow under the following conditions.~~

~~**a.** The Contractor shall bear all expenses of establishing and maintaining an escrow account and escrow agreement acceptable to the Owner.~~

~~**b.** The Contractor shall deposit to and maintain in such escrow only those securities or bank certificates of deposit as are acceptable to the Owner and having a value not less than the 5 percent retainage that would otherwise be withheld from partial payment.~~

~~**c.** The Contractor shall enter into an escrow agreement satisfactory to the Owner.~~

~~**d.** The Contractor shall obtain the written consent of the surety to such agreement.~~

90-09 ACCEPTANCE AND FINAL PAYMENT. When the contract work has been accepted in accordance with the requirements of the subsection titled FINAL ACCEPTANCE of Section 50, the Engineer will prepare the final estimate of the items of work actually performed. The Contractor shall approve the Engineer's final estimate or advise the Engineer of his/her objections to the final estimate which are based on disputes in measurements or computations of the final quantities to be paid under the contract as amended by change order or supplemental agreement. The Contractor and the Engineer shall resolve all disputes (if any) in the measurement and computation of final quantities to be paid within 30 calendar days of the Contractor's receipt of the Engineer's final estimate. If, after such 30 day period, a dispute still exists, the Contractor may approve the Engineer's estimate under protest of the quantities in dispute, and such disputed quantities shall be considered by the Owner as a claim in accordance with the subsection titled CLAIMS FOR ADJUSTMENT AND DISPUTES of Section 50.

After the Contractor has approved, or approved under protest, the Engineer's final estimate, final payment will be processed based on the entire sum, or the undisputed sum in case of approval under protest, determined to be due the Contractor less all previous payments and all amounts to be deducted under the provisions of the contract. All prior partial estimates and payments shall be subject to correction in the final estimate and payment.

If the Contractor has filed a claim for additional compensation under the provisions of the subsection titled CLAIMS FOR ADJUSTMENTS AND DISPUTES of Section 50 or under the provisions of this subsection, such claims will be

considered by the Owner in accordance with local laws or ordinances. Upon final adjudication of such claims, any additional payment determined to be due the Contractor will be paid pursuant to a supplemental final estimate.

90-10 CONSTRUCTION WARRANTY. In addition to any other warranties in this contract, the Contractor warrants that work performed under this contract conforms to the contract requirements and is free of any defect in equipment, material, or design furnished, or workmanship performed by the Contractor or any subcontractor or supplier at any tier. **This warranty shall continue for a period of 1 year from the date of final acceptance of the work.** If the Owner takes possession of any part of the work before final acceptance, this warranty shall continue for a period of 1 year from the date the Owner takes possession.

The Contractor shall remedy at the Contractor's expense any failure to conform or any defect. In addition, the Contractor shall remedy at the Contractor's expense any damage to the Owner's real or personal property, when that damage is the result of:

(1) The Contractor's failure to conform to contract requirements; or

(2) Any defect of equipment, material, workmanship, or design furnished by the Contractor.

The Contractor shall restore any work damaged in fulfilling the terms and conditions of this clause. The Contractor's warranty with respect to work repaired or replaced will run for 1 year from the date of repair or replacement.

The Owner will notify the Contractor, in writing, within a reasonable time after the discovery of any failure, defect, or damage. If the Contractor fails to remedy any failure, defect, or damage within a reasonable time after receipt of notice, the Owner shall have the right to replace, repair, or otherwise remedy the failure, defect, or damage at the Contractor's expense.

With respect to all warranties, express or implied, from subcontractors, manufacturers, or suppliers for work performed and materials furnished under this contract, the Contractor shall:

(1) Obtain all warranties that would be given in normal commercial practice;

(2) Require all warranties to be executed, in writing, for the benefit of the owner, as directed by the owner, and

(3) Enforce all warranties for the benefit of the owner.

This warranty shall not limit the Owner's rights with respect to latent defects, gross mistakes, or fraud.

90-11 PROJECT CLOSEOUT. Approval of final payment to the Contractor is contingent upon completion and submittal of the items listed below. The final payment will not be approved until the Engineer approves the Contractor's submittal.

The Contractor shall:

(a) Provide two (2) copies of all manufacturers' warranties specified for materials, equipment, and installations.

(b) Provide weekly payroll records (not previously received) from the general contractor and all subcontractors.

(c) Complete final clean up in accordance with Subsection 40-09.

(d) Complete all punch list items identified during the Final Inspection.

(e) Provide an executed Certification Regarding Settlement of Claims for release of all claims for labor and material arising out of the Contract. Form is available on the MoDOT Aviation Website.

(f) Provide a certification letter attesting to the actual work performed by the Disadvantaged Business Enterprise (DBE) firm and the amount paid the DBE firm, upon completion of the individual DBE firm's work. This certification letter shall be signed by both the prime contractor and the DBE firm. A sample certification letter is available on the MoDOT Aviation website.

END OF SECTION 90

SECTION 100
CONTRACTOR QUALITY CONTROL PROGRAM

100-01 GENERAL. *See specification C-100.* When the specification requires a Contractor Quality Control Program, the Contractor shall establish, provide, and maintain an effective Quality Control Program that details the methods and procedures that will be taken to assure that all materials and completed construction required by this contract conform to contract plans, technical specifications and other requirements, whether manufactured by the Contractor, or procured from subcontractors or vendors. Although guidelines are established and certain minimum requirements are specified herein and elsewhere in the contract technical specifications, the Contractor shall assume full responsibility for accomplishing the stated purpose.

The intent of this section is to enable the Contractor to establish a necessary level of control that will:

a. Adequately provide for the production of acceptable quality materials.

b. Provide sufficient information to assure both the Contractor and the Engineer that the specification requirements can be met.

c. Allow the Contractor as much latitude as possible to develop his or her own standard of control.

The Contractor shall be prepared to discuss and present, at the preconstruction conference, his/her understanding of the quality control requirements. The Contractor shall not begin any construction or production of materials to be incorporated into the completed work until the Quality Control Program has been reviewed by the Engineer. No partial payment will be made for materials subject to specific quality control requirements until the Quality Control Program has been reviewed.

The quality control requirements contained in this section and elsewhere in the contract technical specifications are in addition to and separate from the acceptance testing requirements. Acceptance testing requirements are the responsibility of the Engineer.

100-02 DESCRIPTION OF PROGRAM.

a. General Description. The Contractor shall establish a Quality Control Program to perform inspection and testing of all items of work required by the technical specifications, including those performed by subcontractors. This Quality Control Program shall ensure conformance to applicable specifications and plans with respect to materials, workmanship, construction, finish, and functional performance. The Quality Control Program shall be effective for control of all construction work performed under this Contract and shall specifically include surveillance and tests required by the technical specifications in addition to other requirements of this section and any other activities deemed necessary by the Contractor to establish an effective level of quality control.

b. Quality Control Program. The Contractor shall describe the Quality Control Program in a written document that shall be reviewed by the Engineer prior to the start of any production, construction, or off-site fabrication. The written Quality Control Program shall be submitted to the Engineer for review at least **5** calendar days before the preconstruction conference.

The Quality Control Program shall be organized to address, as a minimum, the following items:

a. Quality control organization;

b. Project progress schedule;

c. Submittals schedule;

d. Inspection requirements;

e. Quality control testing plan;

f. Documentation of quality control activities; and

g. Requirements for corrective action when quality control and/or acceptance criteria are not met.

The Contractor is encouraged to add any additional elements to the Quality Control Program that he/she deems necessary to adequately control all production and/or construction processes required by this contract.

100-03 QUALITY CONTROL ORGANIZATION. The Contractor Quality Control Program shall be implemented by the establishment of a separate quality control organization. An organizational chart shall be developed to show all quality control personnel and how these personnel integrate with other management/production and construction functions and personnel.

The organizational chart shall identify all quality control staff by name and function, and shall indicate the total staff required to implement all elements of the Quality Control Program, including inspection and testing for each item of work. If necessary, different technicians can be utilized for specific inspection and testing functions for different items of work. If an outside organization or independent testing laboratory is used for implementation of all or part of the Quality Control Program, the personnel assigned shall be subject to the qualification requirements of paragraph 100-03a and 100-03b. The organizational chart shall indicate which personnel are Contractor employees and which are provided by an outside organization.

The quality control organization shall consist of the following minimum personnel:

a. Program Administrator. The Program Administrator shall be a full-time employee of the Contractor or a consultant engaged by the Contractor. The Program Administrator shall have a minimum of 5 years of experience in airport and/or highway construction and shall have had prior quality control experience on a project of comparable size and scope as the contract.

Additional qualifications for the Program Administrator shall include at least 1 of the following requirements:

(1) Professional engineer with 1 year of airport paving experience acceptable to the Engineer.

(2) Engineer-in-training with 2 years of airport paving experience acceptable to the Engineer.

(3) An individual with 3 years of highway and/or airport paving experience acceptable to the Engineer, with a Bachelor of Science Degree in Civil Engineering, Civil Engineering Technology or Construction.

(4) Construction materials technician certified at Level III by the National Institute for Certification in Engineering Technologies (NICET).

(5) Highway materials technician certified at Level III by NICET.

(6) Highway construction technician certified at Level III by NICET.

(7) A NICET certified engineering technician in Civil Engineering Technology with 5 years of highway and/or airport paving experience acceptable to the Engineer.

The Program Administrator shall have full authority to institute any and all actions necessary for the successful implementation of the Quality Control Program to ensure compliance with the contract plans and technical specifications. The Program Administrator shall report directly to a responsible officer of the construction firm. The Program Administrator may supervise the Quality Control Program on more than one project provided that person can be at the job site within 2 hours after being notified of a problem.

b. Quality Control Technicians. A sufficient number of quality control technicians necessary to adequately implement the Quality Control Program shall be provided. These personnel shall be either engineers, engineering technicians, or experienced craftsman with qualifications in the appropriate field equivalent to NICET Level II or higher construction materials technician or highway construction technician and shall have a minimum of 2 years of experience in their area of expertise.

The quality control technicians shall report directly to the Program Administrator and shall perform the following functions:

(1) Inspection of all materials, construction, plant, and equipment for conformance to the technical specifications, and as required by Section 100-06.

(2) Performance of all quality control tests as required by the technical specifications and Section 100-07.

Certification at an equivalent level by a state or nationally recognized organization will be acceptable in lieu of NICET certification.

c. Staffing Levels. The Contractor shall provide sufficient qualified quality control personnel to monitor each work activity at all times. Where material is being produced in a plant for incorporation into the work, separate plant and field technicians shall be provided at each plant and field placement location. The scheduling and coordinating of all inspection and testing must match the type and pace of work activity. The Quality Control Program shall state where different technicians will be required for different work elements.

100-04 PROJECT PROGRESS SCHEDULE. The Contractor shall submit a coordinated construction schedule for all work activities. The schedule shall be prepared as a network diagram in Critical Path Method (CPM), PERT, or other format, or as otherwise specified in the contract. As a minimum, it shall provide information on the sequence of work activities, milestone dates, and activity duration.

The Contractor shall maintain the work schedule and provide an update and analysis of the progress schedule on a twice-monthly basis or as otherwise specified in the contract. Submission of the work schedule shall not relieve the Contractor of overall responsibility for scheduling, sequencing, and coordinating all work to comply with the requirements of the contract.

100-05 SUBMITTALS SCHEDULE. The Contractor shall submit a detailed listing of all submittals (e.g., mix designs, material certifications) and shop drawings required by the technical specifications. The listing can be developed in a spreadsheet format and shall include:

a. Specification item number;
b. Item description;
c. Description of submittal;
d. Specification paragraph requiring submittal; and
e. Scheduled date of submittal.

100-06 INSPECTION REQUIREMENTS. Quality control inspection functions shall be organized to provide inspections for all definable features of work, as detailed below. All inspections shall be documented by the Contractor as specified by Section 100-07.

Inspections shall be performed daily to ensure continuing compliance with contract requirements until completion of the particular feature of work. These shall include the following minimum requirements:

a. During plant operation for material production, quality control test results and periodic inspections shall be utilized to ensure the quality of aggregates and other mix components and to adjust and control mix proportioning to meet the approved mix design and other requirements of the technical specifications. All equipment utilized in proportioning and mixing shall be inspected to ensure its proper operating condition. The Quality Control Program shall detail how these and other quality control functions will be accomplished and utilized.

b. During field operations, quality control test results and periodic inspections shall be utilized to ensure the quality of all materials and workmanship. All equipment utilized in placing, finishing, and compacting shall be inspected to ensure its proper operating condition and to ensure that all such operations are in conformance to the technical specifications and are within the plan dimensions, lines, grades, and tolerances specified. The Program shall document how these and other quality control functions will be accomplished and utilized.

100-07 QUALITY CONTROL TESTING PLAN. As a part of the overall Quality Control Program, the Contractor shall implement a quality control testing plan as required by the technical specifications. The testing plan shall include the minimum tests and test frequencies required by each technical specification Item, as well as any additional quality control tests that the Contractor deems necessary to adequately control production and/or construction processes.

The testing plan can be developed in a spreadsheet fashion and shall, as a minimum, include the following:

a. Specification item number (e.g., P-401);
b. Item description (e.g., Plant Mix Bituminous Pavements);
c. Test type (e.g., gradation, grade, asphalt content);
d. Test standard (e.g., ASTM or AASHTO test number, as applicable);
e. Test frequency (e.g., as required by technical specifications or minimum frequency when requirements are not stated);
f. Responsibility (e.g., plant technician); and
g. Control requirements (e.g., target, permissible deviations).

The testing plan shall contain a statistically-based procedure of random sampling for acquiring test samples in accordance with ASTM D 3665. The Engineer shall be provided the opportunity to witness quality control sampling and testing.

All quality control test results shall be documented by the Contractor as required by Section 100-08.

100-08 DOCUMENTATION. The Contractor shall maintain current quality control records of all inspections and tests performed. These records shall include factual evidence that the required inspections or tests have been performed, including type and number of inspections or tests involved; results of inspections or tests; nature of defects, deviations, causes for rejection, etc.; proposed remedial action; and corrective actions taken.

These records must cover both conforming and defective or deficient features, and must include a statement that all supplies and materials incorporated in the work are in full compliance with the terms of the contract. Legible copies of these records shall be furnished to the Engineer daily. The records shall cover all work placed subsequent to the previously furnished records and shall be verified and signed by the Contractor's Program Administrator.

Specific Contractor quality control records required for the contract shall include, but are not necessarily limited to, the following records:

a. Daily Inspection Reports. Each Contractor quality control technician shall maintain a daily log of all inspections performed for both Contractor and subcontractor operations on a form acceptable to the Engineer. These technician's daily reports shall provide factual evidence that continuous quality control inspections have been performed and shall, as a minimum, include the following:

(1) Technical specification item number and description;
(2) Compliance with approved submittals;
(3) Proper storage of materials and equipment;
(4) Proper operation of all equipment;
(5) Adherence to plans and technical specifications;
(6) Review of quality control tests; and
(7) Safety inspection.

The daily inspection reports shall identify inspections conducted, results of inspections, location and nature of defects found, causes for rejection, and remedial or corrective actions taken or proposed.

The daily inspection reports shall be signed by the responsible quality control technician and the Program Administrator. The Engineer shall be provided at least one copy of each daily inspection report on the work day following the day of record.

b. Daily Test Reports. The Contractor shall be responsible for establishing a system that will record all quality control test results. Daily test reports shall document the following information:

(1) Technical specification item number and description;
(2) Test designation;
(3) Location;
(4) Date of test;
(5) Control requirements;
(6) Test results;
(7) Causes for rejection;
(8) Recommended remedial actions; and
(9) Retests.

Test results from each day's work period shall be submitted to the Engineer prior to the start of the next day's work period. When required by the technical specifications, the Contractor shall maintain statistical quality control charts. The daily test reports shall be signed by the responsible quality control technician and the Program Administrator.

100-09 CORRECTIVE ACTION REQUIREMENTS. The Quality Control Program shall indicate the appropriate action to be taken when a process is deemed, or believed, to be out of control (out of tolerance) and detail what action will be taken to bring the process into control. The requirements for corrective action shall include both general requirements for operation of the Quality Control Program as a whole, and for individual items of work contained in the technical specifications.

The Quality Control Program shall detail how the results of quality control inspections and tests will be used for determining the need for corrective action and shall contain clear sets of rules to gauge when a process is out of control and the type of correction to be taken to regain process control.

When applicable or required by the technical specifications, the Contractor shall establish and utilize statistical quality control charts for individual quality control tests. The requirements for corrective action shall be linked to the control charts.

100-10 SURVEILLANCE BY THE ENGINEER. All items of material and equipment shall be subject to surveillance by the Engineer at the point of production, manufacture or shipment to determine if the Contractor, producer, manufacturer or shipper maintains an adequate quality control system in conformance with the requirements detailed herein and the applicable technical specifications and plans. In addition, all items of materials, equipment and work in place shall be subject to surveillance by the Engineer at the site for the same purpose.

Surveillance by the Engineer does not relieve the Contractor of performing quality control inspections of either on-site or off-site Contractor's or subcontractor's work.

100-11 NONCOMPLIANCE.

a. The Engineer will notify the Contractor of any noncompliance with any of the foregoing requirements. The Contractor shall, after receipt of such notice, immediately take corrective action. Any notice, when delivered by the Engineer or his/her authorized representative to the Contractor or his/her authorized representative at the site of the work shall be considered sufficient notice.

b. In cases where quality control activities do not comply with either the Contractor Quality Control Program or the contract provisions, or where the Contractor fails to properly operate and maintain an effective Quality Control Program, as determined by the Engineer, the Engineer may:

(1) Order the Contractor to replace ineffective or unqualified quality control personnel or subcontractors.

(2) Order the Contractor to stop operations until appropriate corrective actions are taken.

END OF SECTION 100

SECTION 110
METHOD OF ESTIMATING PERCENTAGE OF MATERIAL WITHIN SPECIFICATION LIMITS (PWL)

110-01 GENERAL. When the specifications provide for acceptance of material based on the method of estimating percentage of material within specification limits (PWL), the PWL will be determined in accordance with this section. All test results for a lot will be analyzed statistically to determine the total estimated percentage of the lot that is within specification limits. The PWL is computed using the sample average (X) and sample standard deviation (S_n) of the specified number (n) of sublots for the lot and the specification tolerance limits, L for lower and U for upper, for the particular acceptance parameter. From these values, the respective Quality index(s), Q_L for Lower Quality Index and/or Q_U for Upper Quality Index, is computed and the PWL for the lot for the specified n is determined from Table 1. All specification limits specified in the technical sections shall be absolute values. Test results used in the calculations shall be to the significant figure given in the test procedure.

There is some degree of uncertainty (risk) in the measurement for acceptance because only a small fraction of production material (the population) is sampled and tested. This uncertainty exists because all portions of the production material have the same probability to be randomly sampled. The Contractor's risk is the probability that material produced at the acceptable quality level is rejected or subjected to a pay adjustment. The Owner's risk is the probability that material produced at the rejectable quality level is accepted.

IT IS THE INTENT OF THIS SECTION TO INFORM THE CONTRACTOR THAT, IN ORDER TO CONSISTENTLY OFFSET THE CONTRACTOR'S RISK FOR MATERIAL EVALUATED, PRODUCTION QUALITY (USING POPULATION AVERAGE AND POPULATION STANDARD DEVIATION) MUST BE MAINTAINED AT THE ACCEPTABLE QUALITY SPECIFIED OR HIGHER. IN ALL CASES, IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO PRODUCE AT QUALITY LEVELS THAT WILL MEET THE SPECIFIED ACCEPTANCE CRITERIA WHEN SAMPLED AND TESTED AT THE FREQUENCIES SPECIFIED.

110-02 METHOD FOR COMPUTING PWL. The computational sequence for computing PWL is as follows:

a. Divide the lot into n sublots in accordance with the acceptance requirements of the specification.

b. Locate the random sampling position within the sublot in accordance with the requirements of the specification.

c. Make a measurement at each location, or take a test portion and make the measurement on the test portion in accordance with the testing requirements of the specification.

d. Find the sample average (X) for all sublot values within the lot by using the following formula:

$$X = (x_1 + x_2 + x_3 + \ldots x_n) / n$$

Where: X = Sample average of all sublot values within a lot
x_1, x_2 = Individual sublot values
n = Number of sublots

e. Find the sample standard deviation (S_n) by use of the following formula:

$$S_n = [(d_1^2 + d_2^2 + d_3^2 + \ldots d_n^2)/(n-1)]^{1/2}$$

Where: S_n = Sample standard deviation of the number of sublot values in the set
$d_1, d_2,$ = Deviations of the individual sublot values $x_1, x_2, \ldots$ from the average value X
that is: $d_1 = (x_1 - X)$, $d_2 = (x_2 - X)$ $\ldots$ $d_n = (x_n - X)$
n = Number of sublots

f. For single sided specification limits (i.e., L only), compute the Lower Quality Index Q_L by use of the following formula:

$Q_L = (X - L) / S_n$

Where: L = specification lower tolerance limit

Estimate the percentage of material within limits (PWL) by entering Table 1 with Q_L, using the column appropriate to the total number (n) of measurements. If the value of Q_L falls between values shown on the table, use the next higher value of PWL.

g. For double-sided specification limits (i.e. L and U), compute the Quality Indexes Q_L and Q_U by use of the following formulas:

$Q_L = (X - L) / S_n$ and $Q_U = (U - X) / S_n$

Where: L and U = specification lower and upper tolerance limits

Estimate the percentage of material between the lower (L) and upper (U) tolerance limits (PWL) by entering Table 1 separately with Q_L and Q_U, using the column appropriate to the total number (n) of measurements, and determining the percent of material above P_L and percent of material below P_U for each tolerance limit. If the values of Q_L fall between values shown on the table, use the next higher value of P_L or P_U. Determine the PWL by use of the following formula:

$PWL = (P_L + P_U) - 100$

Where: P_L = percent within lower specification limit
P_U = percent within upper specification limit

EXAMPLE OF PWL CALCULATION

Project: Example Project
Test Item: Item P-401, Lot A.

A. PWL Determination for Mat Density.

1. Density of four random cores taken from Lot A.

A-1 96.60
A-2 97.55
A-3 99.30
A-4 98.35
n = 4

2. Calculate average density for the lot.

$X = (x_1 + x_2 + x_3 + \ldots x_n) / n$
$X = (96.60 + 97.55 + 99.30 + 98.35) / 4$
$X = 97.95$ percent density

3. Calculate the standard deviation (S_n) for the lot.

$S_n = [(d_1^2 + d_2^2 + d_3^2 + \ldots d_n^2)/(n-1)]^{1/2}$
$S_n = [((96.60 - 97.95)^2 + (97.55 - 97.95)^2 + (99.30 - 97.95)^2 + (98.35 - 97.95)^2)) / (4 - 1)]^{1/2}$
$S_n = [(1.82 + 0.16 + 1.82 + 0.16) / 3]^{1/2}$
$S_n = 1.15$

4. Calculate the Lower Quality Index Q_L for the lot. (L=96.3)

$Q_L = (X - L) / S_n$
$Q_L = (97.95 - 96.30) / 1.15$
$Q_L = 1.4348$

5. Determine PWL by entering Table 1 with $Q_L = 1.44$ and n= 4.

PWL = 98

B. PWL Determination for Air Voids.

1. Air Voids of four random samples taken from Lot A.

A-1 5.00
A-2 3.74
A-3 2.30
A-4 3.25

2. Calculate the average air voids for the lot.

$X = (x_1 + x_2 + x_3 + . . . x_n) / n$
$X = (5.00 + 3.74 + 2.30 + 3.25) / 4$
X = 3.57 percent

3. Calculate the standard deviation (S_n) for the lot.

$S_n = [(d_1^2 + d_2^2 + d_3^2 + . . . d_n^2)/(n-1)]^{1/2}$
$S_n = [((3.57 - 5.00)^2 + (3.57 - 3.74)^2 + (3.57 - 2.30)^2 + (3.57 - 3.25)^2) / (4 - 1)]^{1/2}$
$S_n = [(2.04 + 0.03 + 1.62 + 0.10) / 3]^{1/2}$
$S_n = 1.12$

4. Calculate the Lower Quality Index Q_L for the lot. (L= 2.0)

$Q_L = (X - L) / S_n$
$Q_L = (3.57 - 2.00) / 1.12$
$Q_L = 1.3992$

5. Determine P_L by entering Table 1 with $Q_L = 1.41$ and n = 4.

$P_L = 97$

6. Calculate the Upper Quality Index Q_U for the lot. (U= 5.0)

$Q_U = (U - X) / S_n$
$Q_U = (5.00 - 3.57) / 1.12$
$Q_U = 1.2702$

7. Determine P_U by entering Table 1 with $Q_U = 1.29$ and n = 4.

$P_U = 93$

8. Calculate Air Voids PWL

$PWL = (P_L + P_U) - 100$
$PWL = (97 + 93) - 100 = 90$

EXAMPLE OF OUTLIER CALCULATION (Reference ASTM E 178)

Project: Example Project
Test Item: Item P-401, Lot A.

A. Outlier Determination for Mat Density.

1. Density of four random cores taken from Lot A. arranged in descending order.

   A-3 99.30
   A-4 98.35
   A-2 97.55
   A-1 96.60

2. Use n=4 and upper 5 percent significance level of to find the critical value for test criterion = 1.463.

3. Use average density, standard deviation, and test criterion value to evaluate density measurements.

   a. For measurements greater than the average:
   If: (measurement - average)/(standard deviation) is less than test criterion,
   Then: the measurement is not considered an outlier

for A-3 Check if (99.30 - 97.95) / 1.15 greater than 1.463
1.174 is less than 1.463, the value is not an outlier

   b. For measurements less than the average:
   If (average - measurement)/(standard deviation) is less than test criterion,
   the measurement is not considered an outlier

for A-1 Check if (97.95 - 96.60) / 1.15 greater than 1.463
1.0 is less than 1.463, the value is not an outlier

NOTE: In this example, a measurement would be considered an outlier if the density was:
greater than (97.95+1.463x1.15) = 99.63 percent or,
less than (97.95-1.463x1.15) = 96.27 percent

TABLE 1. TABLE FOR ESTIMATING PERCENT OF LOT WITHIN LIMITS (PWL)								
Percent Within Limits (P_L and P_U)	Positive Values of Q (Q_L and Q_U)							
	n=3	n=4	n=5	n=6	n=7	n=8	n=9	n=10
99	1.1541	1.4700	1.6714	1.8008	1.8888	1.9520	1.9994	2.0362
98	1.1524	1.4400	1.6016	1.6982	1.7612	1.8053	1.8379	1.8630
97	1.1496	1.4100	1.5427	1.6181	1.6661	1.6993	1.7235	1.7420
96	1.1456	1.3800	1.4897	1.5497	1.5871	1.6127	1.6313	1.6454
95	1.1405	1.3500	1.4407	1.4887	1.5181	1.5381	1.5525	1.5635
94	1.1342	1.3200	1.3946	1.4329	1.4561	1.4717	1.4829	1.4914
93	1.1269	1.2900	1.3508	1.3810	1.3991	1.4112	1.4199	1.4265
92	1.1184	1.2600	1.3088	1.3323	1.3461	1.3554	1.3620	1.3670
91	1.1089	1.2300	1.2683	1.2860	1.2964	1.3032	1.3081	1.3118
90	1.0982	1.2000	1.2290	1.2419	1.2492	1.2541	1.2576	1.2602
89	1.0864	1.1700	1.1909	1.1995	1.2043	1.2075	1.2098	1.2115
88	1.0736	1.1400	1.1537	1.1587	1.1613	1.1630	1.1643	1.1653
87	1.0597	1.1100	1.1173	1.1192	1.1199	1.1204	1.1208	1.1212
86	1.0448	1.0800	1.0817	1.0808	1.0800	1.0794	1.0791	1.0789
85	1.0288	1.0500	1.0467	1.0435	1.0413	1.0399	1.0389	1.0382
84	1.0119	1.0200	1.0124	1.0071	1.0037	1.0015	1.0000	0.9990
83	0.9939	0.9900	0.9785	0.9715	0.9671	0.9643	0.9624	0.9610
82	0.9749	0.9600	0.9452	0.9367	0.9315	0.9281	0.9258	0.9241
81	0.9550	0.9300	0.9123	0.9025	0.8966	0.8928	0.8901	0.8882
80	0.9342	0.9000	0.8799	0.8690	0.8625	0.8583	0.8554	0.8533
79	0.9124	0.8700	0.8478	0.8360	0.8291	0.8245	0.8214	0.8192
78	0.8897	0.8400	0.8160	0.8036	0.7962	0.7915	0.7882	0.7858
77	0.8662	0.8100	0.7846	0.7716	0.7640	0.7590	0.7556	0.7531
76	0.8417	0.7800	0.7535	0.7401	0.7322	0.7271	0.7236	0.7211
75	0.8165	0.7500	0.7226	0.7089	0.7009	0.6958	0.6922	0.6896
74	0.7904	0.7200	0.6921	0.6781	0.6701	0.6649	0.6613	0.6587
73	0.7636	0.6900	0.6617	0.6477	0.6396	0.6344	0.6308	0.6282
72	0.7360	0.6600	0.6316	0.6176	0.6095	0.6044	0.6008	0.5982
71	0.7077	0.6300	0.6016	0.5878	0.5798	0.5747	0.5712	0.5686
70	0.6787	0.6000	0.5719	0.5582	0.5504	0.5454	0.5419	0.5394
69	0.6490	0.5700	0.5423	0.5290	0.5213	0.5164	0.5130	0.5105
68	0.6187	0.5400	0.5129	0.4999	0.4924	0.4877	0.4844	0.4820
67	0.5878	0.5100	0.4836	0.4710	0.4638	0.4592	0.4560	0.4537
66	0.5563	0.4800	0.4545	0.4424	0.4355	0.4310	0.4280	0.4257
65	0.5242	0.4500	0.4255	0.4139	0.4073	0.4030	0.4001	0.3980
64	0.4916	0.4200	0.3967	0.3856	0.3793	0.3753	0.3725	0.3705
63	0.4586	0.3900	0.3679	0.3575	0.3515	0.3477	0.3451	0.3432
62	0.4251	0.3600	0.3392	0.3295	0.3239	0.3203	0.3179	0.3161
61	0.3911	0.3300	0.3107	0.3016	0.2964	0.2931	0.2908	0.2892
60	0.3568	0.3000	0.2822	0.2738	0.2691	0.2660	0.2639	0.2624
59	0.3222	0.2700	0.2537	0.2461	0.2418	0.2391	0.2372	0.2358
58	0.2872	0.2400	0.2254	0.2186	0.2147	0.2122	0.2105	0.2093
57	0.2519	0.2100	0.1971	0.1911	0.1877	0.1855	0.1840	0.1829
56	0.2164	0.1800	0.1688	0.1636	0.1607	0.1588	0.1575	0.1566
55	0.1806	0.1500	0.1406	0.1363	0.1338	0.1322	0.1312	0.1304
54	0.1447	0.1200	0.1125	0.1090	0.1070	0.1057	0.1049	0.1042
53	0.1087	0.0900	0.0843	0.0817	0.0802	0.0793	0.0786	0.0781
52	0.0725	0.0600	0.0562	0.0544	0.0534	0.0528	0.0524	0.0521
51	0.0363	0.0300	0.0281	0.0272	0.0267	0.0264	0.0262	0.0260
50	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

TABLE 1. TABLE FOR ESTIMATING PERCENT OF LOT WITHIN LIMITS (PWL)								
Percent Within Limits (P_L and P_U)	Negative Values of Q (Q_L and Q_U)							
	n=3	n=4	n=5	n=6	n=7	n=8	n=9	n=10
49	-0.0363	-0.0300	-0.0281	-0.0272	-0.0267	-0.0264	-0.0262	-0.0260
48	-0.0725	-0.0600	-0.0562	-0.0544	-0.0534	-0.0528	-0.0524	-0.0521
47	-0.1087	-0.0900	-0.0843	-0.0817	-0.0802	-0.0793	-0.0786	-0.0781
46	-0.1447	-0.1200	-0.1125	-0.1090	-0.1070	-0.1057	-0.1049	-0.1042
45	-0.1806	-0.1500	-0.1406	-0.1363	-0.1338	-0.1322	-0.1312	-0.1304
44	-0.2164	-0.1800	-0.1688	-0.1636	-0.1607	-0.1588	-0.1575	-0.1566
43	-0.2519	-0.2100	-0.1971	-0.1911	-0.1877	-0.1855	-0.1840	-0.1829
42	-0.2872	-0.2400	-0.2254	-0.2186	-0.2147	-0.2122	-0.2105	-0.2093
41	-0.3222	-0.2700	-0.2537	-0.2461	-0.2418	-0.2391	-0.2372	-0.2358
40	-0.3568	-0.3000	-0.2822	-0.2738	-0.2691	-0.2660	-0.2639	-0.2624
39	-0.3911	-0.3300	-0.3107	-0.3016	-0.2964	-0.2931	-0.2908	-0.2892
38	-0.4251	-0.3600	-0.3392	-0.3295	-0.3239	-0.3203	-0.3179	-0.3161
37	-0.4586	-0.3900	-0.3679	-0.3575	-0.3515	-0.3477	-0.3451	-0.3432
36	-0.4916	-0.4200	-0.3967	-0.3856	-0.3793	-0.3753	-0.3725	-0.3705
35	-0.5242	-0.4500	-0.4255	-0.4139	-0.4073	-0.4030	-0.4001	-0.3980
34	-0.5563	-0.4800	-0.4545	-0.4424	-0.4355	-0.4310	-0.4280	-0.4257
33	-0.5878	-0.5100	-0.4836	-0.4710	-0.4638	-0.4592	-0.4560	-0.4537
32	-0.6187	-0.5400	-0.5129	-0.4999	-0.4924	-0.4877	-0.4844	-0.4820
31	-0.6490	-0.5700	-0.5423	-0.5290	-0.5213	-0.5164	-0.5130	-0.5105
30	-0.6787	-0.6000	-0.5719	-0.5582	-0.5504	-0.5454	-0.5419	-0.5394
29	-0.7077	-0.6300	-0.6016	-0.5878	-0.5798	-0.5747	-0.5712	-0.5686
28	-0.7360	-0.6600	-0.6316	-0.6176	-0.6095	-0.6044	-0.6008	-0.5982
27	-0.7636	-0.6900	-0.6617	-0.6477	-0.6396	-0.6344	-0.6308	-0.6282
26	-0.7904	-0.7200	-0.6921	-0.6781	-0.6701	-0.6649	-0.6613	-0.6587
25	-0.8165	-0.7500	-0.7226	-0.7089	-0.7009	-0.6958	-0.6922	-0.6896
24	-0.8417	-0.7800	-0.7535	-0.7401	-0.7322	-0.7271	-0.7236	-0.7211
23	-0.8662	-0.8100	-0.7846	-0.7716	-0.7640	-0.7590	-0.7556	-0.7531
22	-0.8897	-0.8400	-0.8160	-0.8036	-0.7962	-0.7915	-0.7882	-0.7858
21	-0.9124	-0.8700	-0.8478	-0.8360	-0.8291	-0.8245	-0.8214	-0.8192
20	-0.9342	-0.9000	-0.8799	-0.8690	-0.8625	-0.8583	-0.8554	-0.8533
19	-0.9550	-0.9300	-0.9123	-0.9025	-0.8966	-0.8928	-0.8901	-0.8882
18	-0.9749	-0.9600	-0.9452	-0.9367	-0.9315	-0.9281	-0.9258	-0.9241
17	-0.9939	-0.9900	-0.9785	-0.9715	-0.9671	-0.9643	-0.9624	-0.9610
16	-1.0119	-1.0200	-1.0124	-1.0071	-1.0037	-1.0015	-1.0000	-0.9990
15	-1.0288	-1.0500	-1.0467	-1.0435	-1.0413	-1.0399	-1.0389	-1.0382
14	-1.0448	-1.0800	-1.0817	-1.0808	-1.0800	-1.0794	-1.0791	-1.0789
13	-1.0597	-1.1100	-1.1173	-1.1192	-1.1199	-1.1204	-1.1208	-1.1212
12	-1.0736	-1.1400	-1.1537	-1.1587	-1.1613	-1.1630	-1.1643	-1.1653
11	-1.0864	-1.1700	-1.1909	-1.1995	-1.2043	-1.2075	-1.2098	-1.2115
10	-1.0982	-1.2000	-1.2290	-1.2419	-1.2492	-1.2541	-1.2576	-1.2602
9	-1.1089	-1.2300	-1.2683	-1.2860	-1.2964	-1.3032	-1.3081	-1.3118
8	-1.1184	-1.2600	-1.3088	-1.3323	-1.3461	-1.3554	-1.3620	-1.3670
7	-1.1269	-1.2900	-1.3508	-1.3810	-1.3991	-1.4112	-1.4199	-1.4265
6	-1.1342	-1.3200	-1.3946	-1.4329	-1.4561	-1.4717	-1.4829	-1.4914
5	-1.1405	-1.3500	-1.4407	-1.4887	-1.5181	-1.5381	-1.5525	-1.5635
4	-1.1456	-1.3800	-1.4897	-1.5497	-1.5871	-1.6127	-1.6313	-1.6454
3	-1.1496	-1.4100	-1.5427	-1.6181	-1.6661	-1.6993	-1.7235	-1.7420
2	-1.1524	-1.4400	-1.6016	-1.6982	-1.7612	-1.8053	-1.8379	-1.8630
1	-1.1541	-1.4700	-1.6714	-1.8008	-1.8888	-1.9520	-1.9994	-2.0362

END OF SECTION 110

SECTION 4
SUPPLEMENTARY PROVISIONS

PART A
FEDERAL AND STATE PROVISIONS

1. TITLE VI CLAUSES FOR COMPLIANCE WITH NONDISCRIMINATION REQUIREMENTS (49 USC § 47123, FAA Order 1400.11)

2. GENERAL CIVIL RIGHTS PROVISIONS (49 USC § 47123)

3. ACCESS TO RECORDS AND REPORTS (2 CFR § 200.333; 2 CFR § 200.336; FAA Order 5100.38)

4. DISADVANTAGE BUSINESS ENTERPRISES (DBE) (49 CFR PART 26)

5. TERMINATION OF CONTRACT (2 CFR § 200 Appendix II(B), FAA Advisory Circular 150/5370-10, Section 80-09)

6. CLEAN AIR AND WATER POLLUTION CONTROL (2 CFR § 200 Appendix II(G))

7. DAVIS-BACON REQUIREMENTS (2 CFR § 200 Appendix II(D), 29 CFR PART 5)

8. EQUAL OPPORTUNITY CLAUSE (2 CFR § 200 Appendix II(C), 41 CFR § 60-1.4, 41 CFR § 60-4.3, Executive Order 11246)

9. ENERGY CONSERVATION REQUIREMENTS (2 CFR § 200 Appendix II(H))

10. PROHIBITION OF SEGREGATED FACILITIES (41 CFR § 60)

11. STANDARD FEDERAL EQUAL EMPLOYMENT OPPORTUNITY CONSTRUCTION CONTRACT SPECIFICATIONS (41 CFR 60-4.3)

12. VETERAN'S PREFERENCE (Title 49 U.S.C. 47112(c))

13. OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION CONSTRUCTION SAFETY TRAINING

14. COPELAND "ANTI-KICKBACK" ACT (2 CFR § 200 Appendix II (D), 29 CFR Parts 3 and 5)

15. FEDERAL FAIR LABOR STANDARDS ACT (FEDERAL MINIMUM WAGE) (29 U.S.C. § 201, *et seq.*)

16. OCCUPATIONAL SAFETY AND HEALTH ACT OF 1970 (20 CFR Part 1910)

17. TEXTING WHEN DRIVING (Executive Order 13513, DOT Order 3902.10)

18. PROCUREMENT OF RECOVERED MATERIALS (2 CFR § 200.322, 40 CFR Part 247)

19. BREACH OF CONTRACT TERMS (2 CFR § 200 Appendix II(A))

20. CONTRACT WORKHOURS AND SAFETY STANDARDS ACT REQUIREMENTS (2 CFR § 200 Appendix II(E))

21. SEISMIC SAFETY (49 CFR Part 41)

22. RIGHT TO INVENTIONS (2 CFR § 200 Appendix II(F), 37 CFR § 401)

23. CERTIFICATION OF BIDDER REGARDING TAX DELINQUENCY AND FELONY CONVICTIONS (Sections 415 and 416 of Title IV, Division L of the Consolidated Appropriations Act, 2014, DOT Order 4200.6)

1. **TITLE VI CLAUSES FOR COMPLIANCE WITH NONDISCRIMINATION REQUIREMENTS** (49 USC § 47123, FAA Order 1400.11)

During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees as follows:

1. Compliance with Regulations. The contractor (hereinafter includes consultants) will comply with the **Title VI List of Pertinent Nondiscrimination Acts and Authorities**, as they may be amended from time to time, which are herein incorporated by reference and made a part of this contract.

2. Nondiscrimination. The contractor, with regard to the work performed by it during the contract, will not discriminate on the grounds of race, color, or national origin in the selection and retention of subcontractors, including procurements of materials and leases of equipment. The contractor will not participate directly or indirectly in the discrimination prohibited by the Nondiscrimination Acts and Authorities, including employment practices when the contract covers any activity, project, or program set forth in Appendix B of 49 CFR Part 21.

3. Solicitations for Subcontracts, Including Procurements of Materials and Equipment. In all solicitations, either by competitive bidding or negotiation made by the contractor for work to be performed under a subcontract, including procurements of materials or leases of equipment, each potential subcontractor or supplier will be notified by the contractor of the contractor's obligations under this contract and the Nondiscrimination Acts and Authorities on the grounds of race, color, or national origin.

4. Information and Reports. The contractor will provide all information and reports required by the Acts, the Regulations, and directives issued pursuant thereto and will permit access to its books, records, accounts, other sources of information, and its facilities as may be determined by the Sponsor or the Federal Aviation Administration (FAA) to be pertinent to ascertain compliance with such Nondiscrimination Acts and Authorities and instructions. Where any information required of a contractor is in the exclusive possession of another who fails or refuses to furnish the information, the contractor will so certify to the Sponsor or the FAA, as appropriate, and will set forth what efforts it has made to obtain the information.

5. Sanctions for Noncompliance. In the event of the contractor's noncompliance with the nondiscrimination provisions of this contract, the Sponsor will impose such contract sanctions as it or the FAA may determine to be appropriate, including, but not limited to:

a. Withholding payments to the contractor under the contract until the contractor complies, and/or
b. Cancelling, terminating, or suspending a contract, in whole or in part.

6. Incorporation of Provisions. The contractor will include the provisions of paragraphs one through six in every subcontract, including procurements of materials and leases of equipment, unless exempt by the Acts, the Regulations, and directives issued pursuant thereto. The contractor will take action with respect to any subcontract or procurement as the Sponsor or the FAA may direct as a means of enforcing such provisions, including sanctions for noncompliance. Provided, that if the contractor becomes involved in or is threatened with litigation by a subcontractor or supplier because of such direction, the contractor may request the Sponsor to enter into any litigation to protect the interests of the Sponsor. In addition, the contractor may request the United States to enter into the litigation to protect the interests of the United States.

7. Title VI List of Pertinent Nondiscrimination Acts and Authorities. During the performance of this contract, the contractor, for itself, its assignees, and successors in interest (hereinafter referred to as the "contractor") agrees to comply with the following non-discrimination statutes and authorities; including but not limited to:

- Title VI of the Civil Rights Act of 1964 (42 U.S.C. § 2000d *et seq.*, 78 stat. 252) (prohibits discrimination on the basis of race, color, national origin);
- 49 CFR Part 21 (Non-discrimination in Federally-Assisted Programs of The Department of Transportation—Effectuation of Title VI of the Civil Rights Act of 1964);
- The Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970 (42 U.S.C. § 4601) (prohibits unfair treatment of persons displaced or whose property has been acquired because of Federal or Federal-aid programs and projects);
- Section 504 of the Rehabilitation Act of 1973 (29 U.S.C. § 794 *et seq.*), as amended (prohibits discrimination on the basis of disability); and 49 CFR Part 27;
- The Age Discrimination Act of 1975, as amended (42 U.S.C. § 6101 *et seq.*) (prohibits discrimination on the basis of age);
- Airport and Airway Improvement Act of 1982 (49 U.S.C. § 471, Section 47123), as amended (prohibits discrimination based on race, creed, color, national origin, or sex);
- The Civil Rights Restoration Act of 1987 (PL 100-209) (Broadened the scope, coverage and applicability of Title VI of the Civil Rights Act of 1964, The Age Discrimination Act of 1975 and Section 504 of the Rehabilitation Act of 1973, by expanding the definition of the terms "programs or activities" to include all of the programs or activities of the Federal-aid recipients, sub-recipients and contractors, whether such programs or activities are Federally funded or not);
- Titles II and III of the Americans with Disabilities Act of 1990, which prohibit discrimination on the basis of disability in the operation of public entities, public and private transportation systems, places of public accommodation, and certain testing entities (42 U.S.C. §§ 12131-12189) as implemented by U.S. Department of Transportation regulations at 49 CFR parts 37 and 38;
- The Federal Aviation Administration's Non-discrimination statute (49 U.S.C. § 47123) (prohibits discrimination on the basis of race, color, national origin, and sex);
- Executive Order 12898, Federal Actions to Address Environmental Justice in Minority Populations and Low-Income Populations, which ensures nondiscrimination against minority populations by discouraging programs, policies, and activities with disproportionately high and adverse human health or environmental effects on minority and low-income populations;
- Executive Order 13166, Improving Access to Services for Persons with Limited English Proficiency, and resulting agency guidance, national origin discrimination includes discrimination because of limited English proficiency (LEP). To ensure compliance with Title VI, you must take reasonable steps to ensure that LEP persons have meaningful access to your programs (70 Fed. Reg. at 74087 to 74100); and
- Title IX of the Education Amendments of 1972, as amended, which prohibits you from discriminating because of sex in education programs or activities (20 U.S.C. § 1681 *et seq.*).

2. GENERAL CIVIL RIGHTS PROVISIONS (49 USC § 47123)

The Contractor agrees to comply with pertinent statutes, Executive Orders and such rules as are promulgated to ensure that no person shall, on the grounds of race, creed, color, national origin, sex, age, or disability be excluded from participating in any activity conducted with or benefiting from Federal assistance.

This provision binds the Contractor and subcontractors from the bid solicitation period through the completion of the contract. This provision is in addition to that required by Title VI of the Civil Rights Act of 1964.

3. ACCESS TO RECORDS AND REPORTS (2 CFR § 200.333; 2 CFR § 200.336; FAA Order 5100.38)

The Contractor must maintain an acceptable cost accounting system. The Contractor agrees to provide the Sponsor, MoDOT, the Federal Aviation Administration and the Comptroller General of the United States or any of their duly authorized representatives access to any books, documents, papers, and records of the Contractor which are directly pertinent to the specific contract for the purpose of making audit, examination, excerpts and transcriptions. The Contractor agrees to maintain all books, records and reports required under this contract for a period of not less than three years after final payment is made and all pending matters are closed.

4. DISADVANTAGED BUSINESS ENTERPRISE (DBE)(49 CFR PART 26)

Where used in this provision, "Department of Transportation" or "DOT" refers to the United States Department of Transportation. "MoDOT" refers to the Missouri Department of Transportation and the Missouri Highways and Transportation Commission.

Policy. It is the policy of the Department of Transportation that disadvantaged business enterprises as defined in 49 CFR Part 26 shall have the maximum opportunity to participate in the performance of contracts financed in whole or in part with Federal funds under this agreement. Consequently, the DBE requirements of 49 CFR Part 26 applies to this agreement.

Contract Assurance. MoDOT and the Sponsor will ensure that the following clause is placed in every USDOT assisted contract and subcontract:

"The contractor or subcontractor shall not discriminate on the basis of race, color, national origin, or sex in the performance of this contract. The contractor shall carry out applicable requirements of 49 CFR Part 26 in the award and administration of DOT assisted contracts. Failure by the contractor to carry out these requirements is a material breach of this contract, which may result in the termination of this contract or such other remedy as the Sponsor deems appropriate, which may include, but is not limited to: (1) withholding monthly progress payments; (2) assessing sanctions; (3) liquidated damages; and/or (4) disqualifying the contractor from future bidding as non-responsible.."

(This assurance shall be included in each subcontract the prime contractor signs with a subcontractor.)

Federal Financial Assistance Agreement Assurance. MoDOT and the Sponsor agree to and incorporate the following assurance into the day to day operations and the administration of all USDOT assisted contracts; where "recipient" means MoDOT and any MoDOT grantee receiving USDOT assistance:

"MoDOT or the Sponsor shall not discriminate on the basis of race, color, national origin, or sex in the award and performance of any USDOT assisted contract or in the administration of its DBE Program or the requirements of 49 CFR Part 26. The recipient shall take all necessary and reasonable steps under 49 CFR Part 26 to ensure nondiscrimination in the award and administration of USDOT assisted contracts. The recipient's DBE Program, as required by 49 CFR Part 26 and as approved by USDOT, is incorporated by reference in this agreement. Implementation of this program is a legal obligation and for failure to carry out its approved program, the Department may impose sanctions as provided for under Part 26 and may, in appropriate cases, refer the matter for enforcement under 18 U.S.C. 1001 and/or the Program Fraud Civil Remedies Act of 1986 (31 U.S.C. 3801 et seq.)."

MoDOT and the Sponsor ensure that all recipients of USDOT assisted contracts, funds, or grants incorporate, agree to and comply with the assurance statement.

Prompt Payment. MoDOT and the Sponsor require all contractors to pay all subcontractors and suppliers under this prime contract for satisfactory performance of its contract in compliance with the prompt payment statute, Mo. Revised Statutes, Chapter 34, Section 34.057 (included below). MoDOT and the Sponsor also require the prompt, as defined in Section 34.057, return of all retainage held on all subcontractors after the subcontractor's work is satisfactorily completed, as MoDOT and Sponsor personnel may ultimately determine (if necessary). These prompt payment requirements apply to both DBE and non-DBE subcontractors.

All contractors and subcontractors must retain records of all payments, made or received, for 3 years from the date of final payment and must be available for inspection, upon request, by any authorized representative of MoDOT, the Sponsor or USDOT. MoDOT and the Sponsor will maintain records of actual payments to DBE firms for work committed to at the time of contract award.

MoDOT and the Sponsor will perform audits of contract payments to firms. The audits will review payments to subcontractors to ensure that the actual amount paid to DBE subcontractors equals or exceeds the dollar amounts stated in the schedule of DBE participation and that payment was made in compliance with Missouri Revised Statutes, Chapter 34, Section 34.057.

Missouri Revised Statutes

Chapter 34
State Purchasing and Printing
Section 34.057

August 28, 2014

Public works contracts--prompt payment by public owner to contractor, engineer, architect, or surveyor-- prompt payment by contractor to subcontractor-- progress payments--retainage--late payment charges-- withholding of payments.

34.057. 1. Unless contrary to any federal funding requirements or unless funds from a state grant are not timely received by the contracting public municipality but notwithstanding any other law to the contrary, all public works contracts made and awarded by the appropriate officer, board or agency of the state or of a political subdivision of the state or of any district therein, including any municipality, county and any board referred to as the public owner, for construction, reconstruction or alteration of any public works project, shall provide for prompt payment by the public owner to the contractor, and any professional engineer, architect, landscape architect, or land surveyor, as well as prompt payment by the contractor to the subcontractor and material supplier in accordance with the following:

(1) A public owner shall make progress payments to the contractor and any professional engineer, architect, landscape architect or land surveyor on at least a monthly basis as the work progresses, or, on a lump sum basis according to the terms of the lump sum contract. Except in the case of lump sum contracts, payments shall be based upon estimates prepared at least monthly of work performed and material delivered, as determined by the project architect or engineer. Retainage withheld on any construction contract or subcontract for public works projects shall not exceed five percent of the value of the contract or subcontract. If the contractor is not required to obtain a bond under section 107.170 because the cost of the public works contract is not estimated to exceed fifty thousand dollars, the public owner may withhold retainage on the public works project in an amount not to exceed ten percent of the value of the contract or subcontract. The public owner shall pay the contractor the amount due, less a retainage, within thirty days following the latter of the following:

(a) The date of delivery of materials or construction services purchased;

(b) The date, as designated by the public owner, upon which the invoice is duly delivered to the person or place designated by the public owner; or

(c) In those instances in which the contractor approves the public owner's estimate, the date upon which such notice of approval is duly delivered to the person or place designated by the public owner;

(2) Payments shall be considered received within the context of this section when they are duly posted with the United States Postal Service or other agreed upon delivery service or when they are hand-delivered to an authorized person or place as agreed to by the contracting parties;

(3) If, in the discretion of the owner and the project architect or engineer and the contractor, it is determined that a subcontractor's performance has been completed and the subcontractor can be released prior to substantial completion of the public works contract without risk to the public owner, the contractor shall request such adjustment in retainage, if any, from the public owner as necessary to enable the contractor to pay the subcontractor in full. The public owner

may reduce or eliminate retainage on any contract payment if, in the public owner's opinion, the work is proceeding satisfactorily. If retainage is released and there are any remaining minor items to be completed, an amount equal to one hundred fifty percent of the value of each item as determined by the public owner's duly authorized representatives shall be withheld until such item or items are completed;

(4) The public owner shall pay at least ninety-eight percent of the retainage, less any offsets or deductions authorized in the contract or otherwise authorized by law, to the contractor. The contractor shall pay the subcontractor or supplier after substantial completion of the contract work and acceptance by the public owner's authorized contract representative, or as may otherwise be provided by the contract specifications for state highway, road or bridge projects administered by the state highways and transportation commission. Such payment shall be made within thirty days after acceptance, and the invoice and all other appropriate documentation and certifications in complete and acceptable form are provided, as may be required by the contract documents. If the public owner or the owner's representative determines the work is not substantially completed and accepted, then the owner or the owner's representative shall provide a written explanation of why the work is not considered substantially completed and accepted within fourteen calendar days to the contractor, who shall then provide such notice to the subcontractor or suppliers responsible for such work. If such written explanation is not given by the public body, the public body shall pay at least ninety-eight percent of the retainage within thirty calendar days. If at that time there are any remaining minor items to be completed, an amount equal to one hundred fifty percent of the value of each item as determined by the public owner's representative shall be withheld until such items are completed;

(5) All estimates or invoices for supplies and services purchased, approved and processed, or final payments, shall be paid promptly and shall be subject to late payment charges provided in this section. Except as provided in subsection 4 of this section, if the contractor has not been paid within thirty days as set forth in subdivision (1) of subsection 1 of this section, the contracting agency shall pay the contractor, in addition to the payment due him, interest at the rate of one and one-half percent per month calculated from the expiration of the thirty-day period until fully paid;

(6) When a contractor receives any payment, the contractor shall pay each subcontractor and material supplier in proportion to the work completed by each subcontractor and material supplier his application less any retention not to exceed five percent. If the contractor receives less than the full payment due under the public construction contract, the contractor shall be obligated to disburse on a pro rata basis those funds received, with the contractor, subcontractors and material suppliers each receiving a prorated portion based on the amount of payment. When, however, the public owner does not release the full payment due under the contract because there are specific areas of work or materials he is rejecting or because he has otherwise determined such areas are not suitable for payment then those specific subcontractors or suppliers involved shall not be paid for that portion of the work rejected or deemed not suitable for payment; provided the public owner or the owner's representative gives a written explanation to the contractor, subcontractor, or supplier involved as to why the work or supplies were rejected or deemed not suitable for payment, and all other subcontractors and suppliers shall be paid in full;

(7) If the contractor, without reasonable cause, fails to make any payment to his subcontractors and material suppliers within fifteen days after receipt of payment under the public construction contract, the contractor shall pay to his subcontractors and material suppliers, in addition to the payment due them, interest in the amount of one and one-half percent per month, calculated from the expiration of the fifteen-day period until fully paid. This subdivision shall also apply to any payments made by subcontractors and material suppliers to their subcontractors and material suppliers and to all payments made to lower tier subcontractors and material suppliers throughout the contracting chain;

(8) The public owner shall make final payment of all moneys owed to the contractor, including any retainage withheld under subdivision (4) of this subsection, less any offsets or deductions authorized in the contract or otherwise authorized by law, within thirty days of the due date. Final payment shall be considered due upon the earliest of the following events:

(a) Completion of the project and filing with the owner of all required documentation and certifications, in complete and acceptable form, in accordance with the terms and conditions of the contract;

(b) The project is certified by the architect or engineer authorized to make such certification on behalf of the owner as having been completed, including the filing of all documentation and certifications required by the contract, in complete and acceptable form; or

(c) The project is certified by the contracting authority as having been completed, including the filing of all documentation and certifications required by the contract, in complete and acceptable form.

2. Nothing in this section shall prevent the contractor or subcontractor, at the time of application or certification to the public owner or contractor, from withholding such applications or certifications to the owner or contractor for payment to the subcontractor or material supplier. Amounts intended to be withheld shall not be included in such applications or certifications to the public owner or contractor. Reasons for withholding such applications or certifications shall include, but not be limited to, the following: unsatisfactory job progress; defective construction work or material not remedied; disputed work; failure to comply with other material provisions of the contract; third-party claims filed or reasonable evidence that a claim will be filed; failure of the subcontractor to make timely payments for labor, equipment and materials; damage to a contractor or another subcontractor or material supplier; reasonable evidence that the contract cannot be completed for the unpaid balance of the subcontract sum or a reasonable amount for retention, not to exceed the initial percentage retained by the owner.

3. Should the contractor determine, after application or certification has been made and after payment has been received from the public owner, or after payment has been received by a contractor based upon the public owner's estimate of materials in place and work performed as provided by contract, that all or a portion of the moneys needs to be withheld from a specific subcontractor or material supplier for any of the reasons enumerated in this section, and such moneys are withheld from such subcontractor or material supplier, then such undistributed amounts shall be specifically identified in writing and deducted from the next application or certification made to the public owner or from the next estimate by the public owner of payment due the contractor, until a resolution of the matter has been achieved. Disputes shall be resolved in accordance with the terms of the contract documents. Upon such resolution the amounts withheld by the contractor from the subcontractor or material supplier shall be included in the next application or certification made to the public owner or the next estimate by the public owner and shall be paid promptly in accordance with the provisions of this section. This subsection shall also apply to applications or certifications made by subcontractors or material suppliers to the contractor and throughout the various tiers of the contracting chain.

4. The contracts which provide for payments to the contractor based upon the public owner's estimate of materials in place and work performed rather than applications or certifications submitted by the contractor, the public owner shall pay the contractor within thirty days following the date upon which the estimate is required by contract to be completed by the public owner, the amount due less a retainage not to exceed five percent. All such estimates by the public owner shall be paid promptly and shall be subject to late payment charges as provided in this subsection. After the thirtieth day following the date upon which the estimate is required by contract to be completed by the public owner, the contracting agency shall pay the contractor, in addition to the payment due him, interest at a rate of one and one-half percent per month calculated from the expiration of the thirty-day period until fully paid.

5. The public owner shall pay or cause to be paid to any professional engineer, architect, landscape architect, or land surveyor the amount due within thirty days following the receipt of an invoice prepared and submitted in accordance with the contract terms. In addition to the payment due, the contracting agency shall pay interest at the rate of one and one-half percent per month calculated from the expiration of the thirty-day period until fully paid.

6. Nothing in this section shall prevent the owner from withholding payment or final payment from the contractor, or a subcontractor or material supplier. Reasons for withholding payment or final payment shall include, but not be limited to, the following: liquidated damages; unsatisfactory job progress; defective construction work or material not remedied; disputed work; failure to comply with any material provision of the contract; third party claims filed or reasonable evidence that a claim will be filed; failure to make timely payments for labor, equipment or materials; damage to a contractor, subcontractor or material supplier; reasonable evidence that a subcontractor or material supplier cannot be fully compensated under its contract with the contractor for the unpaid balance of the contract sum; or citation by the enforcing authority for acts of the contractor or subcontractor which do not comply with any material

prime contractor for its own records, without weekly submission to the sponsoring government agency (or the applicant, sponsor, or owner).

(B) Each payroll submitted shall be accompanied by a "Statement of Compliance," signed by the contractor or subcontractor or his or her agent who pays or supervises the payment of the persons employed under the contract and shall certify the following:

(1) The payroll for the payroll period contains the information required to be provided under 29 CFR § 5.5(a)(3)(ii), the appropriate information is being maintained under 29 CFR § 5.5(a)(3)(i) and that such information is correct and complete;

(2) Each laborer and mechanic (including each helper, apprentice and trainee) employed on the contract during the payroll period has been paid the full weekly wages earned, without rebate, either directly or indirectly, and that no deductions have been made either directly or indirectly from the full wages earned, other than permissible deductions as set forth in Regulations 29 CFR Part 3;

(3) Each laborer or mechanic has been paid not less than the applicable wage rates and fringe benefits or cash equivalents for the classification of work performed, as specified in the applicable wage determination incorporated into the contract.

(C) The weekly submission of a properly executed certification set forth on the reverse side of Optional Form WH-347 shall satisfy the requirement for submission of the "Statement of Compliance" required by paragraph (3)(ii)(B) of this section.

(D) The falsification of any of the above certifications may subject the contractor or subcontractor to civil or criminal prosecution under Section 1001 of Title 18 and Section 231 of Title 31 of the United States Code.

(iii) The contractor or subcontractor shall make the records required under paragraph (3)(i) of this section available for inspection, copying, or transcription by authorized representatives of the sponsor, the Federal Aviation Administration, or the Department of Labor, and shall permit such representatives to interview employees during working hours on the job. If the contractor or subcontractor fails to submit the required records or to make them available, the Federal agency may, after written notice to the contractor, sponsor, applicant or owner, take such action as may be necessary to cause the suspension of any further payment, advance, or guarantee of funds. Furthermore, failure to submit the required records upon request or to make such records available may be grounds for debarment action pursuant to 29 CFR 5.12.

4 Apprentices and Trainees.

(i) Apprentices. Apprentices will be permitted to work at less than the predetermined rate for the work they performed when they are employed pursuant to and individually registered in a bona fide apprenticeship program registered with the U.S. Department of Labor, Employment and Training Administration, Bureau of Apprenticeship and Training, or with a State Apprenticeship Agency recognized by the Bureau, or if a person is employed in his or her first 90 days of probationary employment as an apprentice in such an apprenticeship program, who is not individually registered in the program, but who has been certified by the Bureau of Apprenticeship and Training or a State Apprenticeship Agency (where appropriate) to be eligible for probationary employment as an apprentice. The allowable ratio of apprentices to journeymen on the job site in any craft classification shall not be greater than the ratio permitted to the contractor as to the entire work force under the registered program. Any worker listed on a payroll at an apprentice wage rate, who is not registered or otherwise employed as stated above, shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any apprentice performing work on the

job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. Where a contractor is performing construction on a project in a locality other than that in which its program is registered, the ratios and wage rates (expressed in percentages of the journeyman's hourly rate) specified in the contractor's or subcontractor's registered program shall be observed. Every apprentice must be paid at not less than the rate specified in the registered program for the apprentice's level of progress, expressed as a percentage of the journeymen hourly rate specified in the applicable wage determination. Apprentices shall be paid fringe benefits in accordance with the provisions of the apprenticeship program. If the apprenticeship program does not specify fringe benefits, apprentices must be paid the full amount of fringe benefits listed on the wage determination for the applicable classification. If the Administrator determines that a different practice prevails for the applicable apprentice classification, fringes shall be paid in accordance with that determination. In the event the Bureau of Apprenticeship and Training, or a State Apprenticeship Agency recognized by the Bureau, withdraws approval of an apprenticeship program, the contractor will no longer be permitted to utilize apprentices at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(ii) Trainees. Except as provided in 29 CFR 5.16, trainees will not be permitted to work at less than the predetermined rate for the work performed unless they are employed pursuant to and individually registered in a program which has received prior approval, evidenced by formal certification by the U.S. Department of Labor, Employment and Training Administration. The ratio of trainees to journeymen on the job site shall not be greater than permitted under the plan approved by the Employment and Training Administration. Every trainee must be paid at not less than the rate specified in the approved program for the trainee's level of progress, expressed as a percentage of the journeyman hourly rate specified in the applicable wage determination. Trainees shall be paid fringe benefits in accordance with the provisions of the trainee program. If the trainee program does not mention fringe benefits, trainees shall be paid the full amount of fringe benefits listed on the wage determination unless the Administrator of the Wage and Hour Division determines that there is an apprenticeship program associated with the corresponding journeyman wage rate on the wage determination that provides for less than full fringe benefits for apprentices. Any employee listed on the payroll at a trainee rate that is not registered and participating in a training plan approved by the Employment and Training Administration shall be paid not less than the applicable wage rate on the wage determination for the classification of work actually performed. In addition, any trainee performing work on the job site in excess of the ratio permitted under the registered program shall be paid not less than the applicable wage rate on the wage determination for the work actually performed. In the event the Employment and Training Administration withdraws approval of a training program, the contractor will no longer be permitted to utilize trainees at less than the applicable predetermined rate for the work performed until an acceptable program is approved.

(iii) Equal Employment Opportunity. The utilization of apprentices, trainees and journeymen under this part shall be in conformity with the equal employment opportunity requirements of Executive Order 11246, as amended, and 29 CFR Part 30.

5. Compliance With Copeland Act Requirements.

The contractor shall comply with the requirements of 29 CFR Part 3, which are incorporated by reference in this contract.

6. Subcontracts.

The contractor or subcontractor shall insert in any subcontracts the clauses contained in 29 CFR Part 5.5(a)(1) through (10) and such other clauses as the Federal Aviation Administration may by appropriate instructions require, and also a clause requiring the subcontractors to include these clauses in any lower tier subcontracts.

The prime contractor shall be responsible for the compliance by any subcontractor or lower tier subcontractor with all the contract clauses in 29 CFR Part 5.5.

7. Contract Termination: Debarment.

A breach of the contract clauses in paragraph 10.1 through 10.10 of this section may be grounds for termination of the contract, and for debarment as a contractor and a subcontractor as provided in 29 CFR 5.12.

8. Compliance With Davis-Bacon and Related Act Requirements.

All rulings and interpretations of the Davis-Bacon and Related Acts contained in 29 CFR Parts 1, 3, and 5 are herein incorporated by reference in this contract.

9. Disputes Concerning Labor Standards.

Disputes arising out of the labor standards provisions of this contract shall not be subject to the general disputes clause of this contract. Such disputes shall be resolved in accordance with the procedures of the Department of Labor set forth in 29 CFR Parts 5, 6, and 7. Disputes within the meaning of this clause include disputes between the contractor (or any of its subcontractors) and the contracting agency, the U.S. Department of Labor, or the employees or their representatives.

10. Certification of Eligibility.

(i) By entering into this contract, the contractor certifies that neither it (nor he or she) nor any person or firm who has an interest in the contractor's firm is a person or firm ineligible to be awarded Government contracts by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

(ii) No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1).

(iii) The penalty for making false statements is prescribed in the U.S. Criminal Code, 18 U.S.C. 1001.

8. EQUAL OPPORTUNITY CLAUSE (2 CFR § 200 Appendix II(C), 41 CFR § 60-1.4, 41 CFR § 60-4.3, Executive Order 11246)

During the performance of this contract, the contractor agrees as follows:

(1) The contractor will not discriminate against any employee or applicant for employment because of race, color, religion, sex, or national origin. The contractor will take affirmative action to ensure that applicants are employed, and that employees are treated during employment, without regard to their race, color, religion, sex, sexual orientation, gender identify, or national origin. Such action shall include, but not be limited to, the following: employment, upgrading, demotion, or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The contractor agrees to post in conspicuous places, available to employees and applicants for employment, notices to be provided setting forth the provisions of this nondiscrimination clause.

(2) The contractor will, in all solicitations or advertisements for employees placed by or on behalf of the contractor, state that all qualified applicants will receive considerations for employment without regard to race, color, religion, sex, or national origin.

(3) The contractor will send to each labor union or representative of workers with which it has a collective bargaining agreement or other contract or understanding, a notice to be provided advising the said labor union or workers'

representatives of the contractor's commitments under this section, and shall post copies of the notice in conspicuous places available to employees and applicants for employment.

(4) The contractor will comply with all provisions of Executive Order 11246 of September 24, 1965, and of the rules, regulations, and relevant orders of the Secretary of Labor.

(5) The contractor will furnish all information and reports required by Executive Order 11246 of September 24, 1965, and by rules, regulations, and orders of the Secretary of Labor, or pursuant thereto, and will permit access to his books, records, and accounts by the administering agency and the Secretary of Labor for purposes of investigation to ascertain compliance with such rules, regulations, and orders.

(6) In the event of the contractor's noncompliance with the nondiscrimination clauses of this contract or with any of the said rules, regulations, or orders, this contract may be canceled, terminated or suspended in whole or in part and the contractor may be declared ineligible for further Government contracts or federally assisted construction contracts in accordance with procedures authorized in Executive Order 11246 of September 24, 1965, and such other sanctions may be imposed and remedies invoked as provided in Executive Order 11246 of September 24, 1965, or by rule, regulation, or order of the Secretary of Labor, or as otherwise provided by law.

(7) The contractor will include the portion of the sentence immediately preceding paragraph (1) and the provisions of paragraphs (1) through (7) in every subcontract or purchase order unless exempted by rules, regulations, or orders of the Secretary of Labor issued pursuant to section 204 of Executive Order 11246 of September 24, 1965, so that such provisions will be binding upon each subcontractor or vendor. The contractor will take such action with respect to any subcontract or purchase order as the administering agency may direct as a means of enforcing such provision, including sanctions for noncompliance: *Provided, however,* that in the event a contractor becomes involved in, or is threatened with, litigation with a subcontractor or vendor as a result of such direction by the administering agency the contractor may request the United States to enter into such litigation to protect the interests of the United States.

9. ENERGY CONSERVATION REQUIREMENTS (2 CFR § 200 Appendix II(H))

The Contractor and Subcontractor agree to comply with mandatory standards and policies relating to energy efficiency that are contained in the state energy conservation plan issued in compliance with the Energy Policy and Conservation Act (42 U.S.C. 6201 *et seq.*).

10. PROHIBITION OF SEGREGATED FACILITIES (41 CFR § 60)

1. The Contractor agrees that it does not and will not maintain or provide for its employees any segregated facilities at any of its establishments, and that it does not and will not permit its employees to perform their services at any location under its control where segregated facilities are maintained. The Contractor agrees that a breach of this clause is a violation of the Equal Opportunity clause in this contract.

2. "Segregated facilities," as used in this clause, means any waiting rooms, rest areas, rest rooms and wash rooms, restaurants and other eating areas, time clocks, locker rooms and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing facilities provided for employees, that are segregated by explicit directive or are in fact segregated on the basis of race, color, religion, sex, or national origin because of written or oral policies or employee custom. The term does not include separate or single-user rest rooms or necessary dressing or sleeping areas provided to assure privacy between the sexes.

3. The Contractor shall include this clause in every subcontract and purchase order that is subject to the Equal Opportunity clause of this contract.

11. STANDARD FEDERAL EQUAL EMPLOYMENT OPPORTUNITY CONSTRUCTION CONTRACT SPECIFICATIONS (41 CFR 60-4.3)

1. As used in these specifications:

a. "Covered area" means the geographical area described in the solicitation from which this contract resulted;

b. "Director" means Director, Office of Federal Contract Compliance Programs (OFCCP), U.S. Department of Labor, or any person to whom the Director delegates authority;

c. "Employer identification number" means the Federal social security number used on the Employer's Quarterly Federal Tax Return, U.S. Treasury Department Form 941;

d. "Minority" includes:

(1) Black (all persons having origins in any of the Black African racial groups not of Hispanic origin);

(2) Hispanic (all persons of Mexican, Puerto Rican, Cuban, Central or South American, or other Spanish culture or origin regardless of race);

(3) Asian and Pacific Islander (all persons having origins in any of the original peoples of the Far East, Southeast Asia, the Indian Subcontinent, or the Pacific Islands); and

(4) American Indian or Alaskan native (all persons having origins in any of the original peoples of North America and maintaining identifiable tribal affiliations through membership and participation or community identification).

2. Whenever the contractor, or any subcontractor at any tier, subcontracts a portion of the work involving any construction trade, it shall physically include in each subcontract in excess of $10,000 the provisions of these specifications and the Notice which contains the applicable goals for minority and female participation and which is set forth in the solicitations from which this contract resulted.

3. If the contractor is participating (pursuant to 41 CFR Part 60-4.5) in a Hometown Plan approved by the U.S. Department of Labor in the covered area either individually or through an association, its affirmative action obligations on all work in the Plan area (including goals and timetables) shall be in accordance with that Plan for those trades which have unions participating in the Plan. Contractors shall be able to demonstrate their participation in and compliance with the provisions of any such Hometown Plan. Each contractor or subcontractor participating in an approved plan is individually required to comply with its obligations under the EEO clause and to make a good faith effort to achieve each goal under the Plan in each trade in which it has employees. The overall good faith performance by other contractors or subcontractors toward a goal in an approved Plan does not excuse any covered contractor's or subcontractor's failure to take good faith efforts to achieve the Plan goals and timetables.

4. The contractor shall implement the specific affirmative action standards provided in paragraphs 11.7a through 11.7p of these specifications. The goals set forth in the solicitation from which this contract resulted are expressed as percentages of the total hours of employment and training of minority and female utilization the contractor should reasonably be able to achieve in each construction trade in which it has employees in the covered area. Covered construction contractors performing construction work in a geographical area where they do not have a Federal or federally assisted construction contract shall apply the minority and female goals established for the geographical area where the work is being performed. Goals are published periodically in the Federal Register in notice form, and such notices may be obtained from any Office of Federal Contract Compliance Programs office or from Federal procurement contracting officers. The contractor is expected to make substantially uniform progress in meeting its goals in each craft during the period specified.

5. Neither the provisions of any collective bargaining agreement nor the failure by a union with whom the contractor has a collective bargaining agreement to refer either minorities or women shall excuse the contractor's obligations under these specifications, Executive Order 11246, or the regulations promulgated pursuant thereto.

6. In order for the non-working training hours of apprentices and trainees to be counted in meeting the goals, such apprentices and trainees shall be employed by the contractor during the training period and the contractor shall have

made a commitment to employ the apprentices and trainees at the completion of their training, subject to the availability of employment opportunities. Trainees shall be trained pursuant to training programs approved by the U.S. Department of Labor.

7. The contractor shall take specific affirmative actions to ensure equal employment opportunity. The evaluation of the contractor's compliance with these specifications shall be based upon its effort to achieve maximum results from its actions. The contractor shall document these efforts fully and shall implement affirmative action steps at least as extensive as the following:

a. Ensure and maintain a working environment free of harassment, intimidation, and coercion at all sites, and in all facilities at which the contractor's employees are assigned to work. The contractor, where possible, will assign two or more women to each construction project. The contractor shall specifically ensure that all foremen, superintendents, and other onsite supervisory personnel are aware of and carry out the contractor's obligation to maintain such a working environment, with specific attention to minority or female individuals working at such sites or in such facilities.

b. Establish and maintain a current list of minority and female recruitment sources, provide written notification to minority and female recruitment sources and to community organizations when the contractor or its unions have employment opportunities available, and maintain a record of the organizations' responses.

c. Maintain a current file of the names, addresses, and telephone numbers of each minority and female off-the-street applicant and minority or female referral from a union, a recruitment source, or community organization and of what action was taken with respect to each such individual. If such individual was sent to the union hiring hall for referral and was not referred back to the contractor by the union or, if referred, not employed by the contractor, this shall be documented in the file with the reason therefore along with whatever additional actions the contractor may have taken.

d. Provide immediate written notification to the Director when the union or unions with which the contractor has a collective bargaining agreement has not referred to the contractor a minority person or female sent by the contractor, or when the contractor has other information that the union referral process has impeded the contractor's efforts to meet its obligations.

e. Develop on-the-job training opportunities and/or participate in training programs for the area which expressly include minorities and women, including upgrading programs and apprenticeship and trainee programs relevant to the contractor's employment needs, especially those programs funded or approved by the Department of Labor. The contractor shall provide notice of these programs to the sources compiled under 11.7b above.

f. Disseminate the contractor's EEO policy by providing notice of the policy to unions and training programs and requesting their cooperation in assisting the contractor in meeting its EEO obligations; by including it in any policy manual and collective bargaining agreement; by publicizing it in the company newspaper, annual report, etc.; by specific review of the policy with all management personnel and with all minority and female employees at least once a year; and by posting the company EEO policy on bulletin boards accessible to all employees at each location where construction work is performed.

g. Review, at least annually, the company's EEO policy and affirmative action obligations under these specifications with all employees having any responsibility for hiring, assignment, layoff, termination, or other employment decisions including specific review of these items, with onsite supervisory personnel such as superintendents, general foremen, etc., prior to the initiation of construction work at any job site. A written record shall be made and maintained identifying the time and place of these meetings, persons attending, subject matter discussed, and disposition of the subject matter.

h. Disseminate the contractor's EEO policy externally by including it in any advertising in the news media, specifically including minority and female news media, and providing written notification to and discussing the contractor's EEO policy with other contractors and subcontractors with whom the contractor does or anticipates doing business.

i. Direct its recruitment efforts, both oral and written, to minority, female, and community organizations, to schools with minority and female students, and to minority and female recruitment and training organizations serving the contractor's recruitment area and employment needs. Not later than one month prior to the date for the acceptance of applications for apprenticeship or other training by any recruitment source, the contractor shall send written notification to organizations, such as the above, describing the openings, screening procedures, and tests to be used in the selection process.

j. Encourage present minority and female employees to recruit other minority persons and women and, where reasonable, provide after school, summer, and vacation employment to minority and female youth both on the site and in other areas of a contractor's workforce.

k. Validate all tests and other selection requirements where there is an obligation to do so under 41 CFR Part 60-3.

l. Conduct, at least annually, an inventory and evaluation at least of all minority and female personnel for promotional opportunities and encourage these employees to seek or to prepare for, through appropriate training, etc., such opportunities.

m. Ensure that seniority practices, job classifications, work assignments, and other personnel practices do not have a discriminatory effect by continually monitoring all personnel and employment related activities to ensure that the EEO policy and the contractor's obligations under these specifications are being carried out.

n. Ensure that all facilities and company activities are non-segregated, except that separate or single user toilet and necessary changing facilities shall be provided to assure privacy between the sexes.

o. Document and maintain a record of all solicitations of offers for subcontracts from minority and female construction contractors and suppliers, including circulation of solicitations to minority and female contractor associations and other business associations.

p. Conduct a review, at least annually, of all supervisors' adherence to and performance under the contractor's EEO policies and affirmative action obligations.

8. Contractors are encouraged to participate in voluntary associations, which assist in fulfilling one or more of their affirmative action obligations (11.7a through 11.7p). The efforts of a contractor association, joint contractor union, contractor community, or other similar groups of which the contractor is a member and participant may be asserted as fulfilling any one or more of its obligations under 11.7a through 11.7p of these specifications provided that the contractor actively participates in the group, makes every effort to assure that the group has a positive impact on the employment of minorities and women in the industry, ensures that the concrete benefits of the program are reflected in the contractor's minority and female workforce participation, makes a good faith effort to meet its individual goals and timetables, and can provide access to documentation which demonstrates the effectiveness of actions taken on behalf of the contractor. The obligation to comply, however, is the contractor's, and failure of such a group to fulfill an obligation shall not be a defense for the contractor's noncompliance.

9. A single goal for minorities and a separate single goal for women have been established. The contractor, however, is required to provide equal employment opportunity and to take affirmative action for all minority groups, both male and female, and all women, both minority and non-minority. Consequently, if the particular group is employed in a substantially disparate manner (for example, even though the contractor has achieved its goals for women generally), the contractor may be in violation of the Executive Order if a specific minority group of women is underutilized.

10. The contractor shall not use the goals and timetables or affirmative action standards to discriminate against any person because of race, color, religion, sex, or national origin.

11. The contractor shall not enter into any subcontract with any person or firm debarred from Government contracts pursuant to Executive Order 11246.

12. The contractor shall carry out such sanctions and penalties for violation of these specifications and of the Equal Opportunity Clause, including suspension, termination, and cancellation of existing subcontracts as may be imposed or ordered pursuant to Executive Order 11246, as amended, and its implementing regulations, by the Office of Federal Contract Compliance Programs. Any contractor who fails to carry out such sanctions and penalties shall be in violation of these specifications and Executive Order 11246, as amended.

13. The contractor, in fulfilling its obligations under these specifications, shall implement specific affirmative action steps, at least as extensive as those standards prescribed in paragraph 11.7 of these specifications, so as to achieve maximum results from its efforts to ensure equal employment opportunity. If the contractor fails to comply with the requirements of the Executive Order, the implementing regulations, or these specifications, the Director shall proceed in accordance with 41 CFR Part 60-4.8.

14. The contractor shall designate a responsible official to monitor all employment related activity to ensure that the company EEO policy is being carried out, to submit reports relating to the provisions hereof as may be required by the Government, and to keep records. Records shall at least include for each employee, the name, address, telephone number, construction trade, union affiliation if any, employee identification number when assigned, social security number, race, sex, status (e.g., mechanic, apprentice, trainee, helper, or laborer), dates of changes in status, hours worked per week in the indicated trade, rate of pay, and locations at which the work was performed. Records shall be maintained in an easily understandable and retrievable form; however, to the degree that existing records satisfy this requirement, contractors shall not be required to maintain separate records.

15. Nothing herein provided shall be construed as a limitation upon the application of other laws which establish different standards of compliance or upon the application of requirements for the hiring of local or other area residents (e.g., those under the Public Works Employment Act of 1977 and the Community Development Block Grant Program).

12. VETERAN'S PREFERENCE (Title 49 U.S.C. 47112(c))

In the employment of labor (excluding executive, administrative, and supervisory positions), the contractor and all sub-tier contractors must give preference to covered veterans as defined within Title 49 United States Code Section 47112. Covered veterans include Vietnam era veterans, Persian Gulf veterans, Afghanistan-Iraq war veterans, disabled veterans, and small business concerns (as defined by 15 U.S.C. 632) owned and controlled by disabled veterans. This preference only applies when there are covered veterans readily available and qualified to perform the work to which the employment relates.

13. OCCUPATIONAL SAFETY AND HEALTH ADMINISTRATION CONSTRUCTION SAFETY TRAINING

The Contractor and its subcontractors (if any subcontractors are retained) shall comply with all applicable provisions of section 292.675, Revised Statutes of Missouri, which statute is incorporated herein by reference and is made a part of this contract. Section 292.675 states that any person signing a contract to work on the construction of public works for any public body shall provide a ten hour Occupational Safety and Health Administration (OSHA) construction safety program for their on-site employees, which includes a course in construction safety and health approved by OSHA or a similar program approved by the Department of Labor and Industrial Relations which is at least as stringent as an approved OSHA program, unless such employees have previously completed the required program and hold documentation of such prior completion. All employees who have not previously completed the program are required to complete the program within sixty (60) days of beginning work on such construction project. Any employee found on a worksite subject to section 292.675's requirements without documentation of the successful completion of this course shall have twenty (20) days to produce such documentation before being subject to removal from the project.

The Contractor shall forfeit as penalty to the public body on whose behalf the contract is made or awarded two thousand five hundred dollars ($2,500) plus one hundred dollars ($100) for each employee employed by the contractor or subcontractor, for each calendar day, or portion thereof, such employee is employed by the contractor or subcontractor without the required training. These penalties shall not begin to accrue until the sixty (60) day and twenty (20) day time periods described above have elapsed. The public body awarding the contract shall withhold and retain therefrom all sums and amounts due and owing as a result of any violation of section 292.675 when making payments to the Contractor under the contract. The Contractor may withhold from any subcontractor sufficient sums to cover any penalties the public body has withheld from the Contractor resulting from the subcontractor's failure to comply with the terms of section 292.675.

14. COPELAND "ANTI-KICKBACK" ACT (2 CFR § 200 Appendix II(D), 29 CFR Parts 3 and 5)

Contractor must comply with the requirements of the Copeland "Anti-Kickback" Act (18 U.S.C. § 874 and 40 U.S.C. § 3145), as supplemented by Department of Labor regulation 29 CFR Part 3. Contractor and subcontractors are prohibited from inducing, by any means, any person employed on the project to give up any part of the compensation to which the employee is entitled. The Contractor and each subcontractor must submit to the Owner a weekly statement on the wages paid to each employee performing on covered work during the prior week. Owner must report any violations of the Act to the Federal Aviation Administration.

15. FEDERAL FAIR LABOR STANDARDS ACT (FEDERAL MINIMUM WAGE) (29 U.S.C. § 201, *et seq.*)

All contracts and subcontracts that result from this solicitation incorporate by reference the provisions of 29 CFR Part 201, the Federal Fair Labor Standards Act (FLSA), with the same force and effect as if given in full text. The FLSA sets minimum wage, overtime pay, recordkeeping, and child labor standards for full and part time workers.

The Contractor has full responsibility to monitor compliance to the referenced statute or regulation. The Contractor must address any claims or disputes that arise from this requirement directly with the U.S. Department of Labor-Wage and Hour Division.

16. OCCUPATIONAL SAFETY AND HEALTH ACT OF 1970 (20 CFR Part 1910)

All contracts and subcontracts that result from this solicitation incorporate by reference the requirements of 29 CFR Part 1910 with the same force and effect as if given in full text. The Contractor must provide a work environment that is free from recognized hazards that may cause death or serious physical harm to the employee. The Contractor retains full responsibility to monitor its compliance and their subcontractor's compliance with the applicable requirements of the Occupational Safety and Health Act of 1970 (20 CFR Part 1910). The Contractor must address any claims or disputes that pertain to a referenced requirement directly with the U.S. Department of Labor-Occupational Safety and Health Administration.

17. TEXTING WHEN DRIVING (Executive Order 13513, DOT Order 3902.10)

In accordance with Executive Order 13513, "Federal Leadership on Reducing Text Messaging While Driving" (10/1/2009) and DOT Order 3902.10 "Text Messaging While Driving" (12/30/2009), the Federal Aviation Administration encourages recipients of Federal grant funds to adopt and enforce safety policies that decrease crashes by distracted drivers, including policies to ban text messaging while driving when performing work related to a grant or subgrant.

In support of its initiative, the Owner encourages the Contractor to promote policies and initiatives for its employees and other work personnel that decrease crashes by distracted drivers, including policies that ban text messaging while driving motor vehicles while performing work activities associated with the project. The Contractor must include the substance of this clause in all sub-tier contracts exceeding $3,500 that involve driving a motor vehicle in performance of work activities associated with the project.

18. PROCUREMENT OF RECOVERED MATERIALS (2 CFR § 200.322, 40 CFR Part 247)

Contractor and subcontractor agree to comply with Section 6002 of the Solid Waste Disposal Act, as amended by the Resource Conservation and Recovery Act, and the regulatory provisions of 40 CFR Part 247. In the performance of this contract and to the extent practicable, the Contractor and subcontractors are to use products containing the highest percentage of recovered materials for items designated by the Environmental Protection Agency (EPA) under 40 CFR Part 247 whenever:

(a) The contract requires procurement of $10,000 or more of a designated item during the fiscal year; or
(b) The contractor has procured $10,000 or more of a designated item using Federal funding during the previous fiscal year.

The list of EPA-designated items is available at www.epa.gov/smm/comprehensive-procurement-guidelines-construction-products.

Section 6002(c) establishes exceptions to the preference for recovery of EPA-designated products if the contractor can demonstrate the item is:

(a) Not reasonably available within a timeframe providing for compliance with the contract performance schedule;
(b) Fails to meet reasonable contract performance requirements; or
(c) Is only available at an unreasonable price.

19. BREACH OF CONTRACT TERMS (2 CFR § 200 Appendix II(A))

Any violation or breach of terms of this contract on the part of the Contractor or its subcontractors may result in the suspension or termination of this contract or such other action that may be necessary to enforce the rights of the parties of this agreement.

The Owner will provide the Contractor written notice that describes the nature of the breach and corrective actions the Contractor must undertake in order to avoid termination of the contract. The Owner reserves the right to withhold payments to the Contractor until such time the Contractor corrects the breach or the Owner elects to terminate the contract. The Owner's notice will identify a specific date by which the Contractor must correct the breach. The Owner may proceed with termination of the contract if the Contractor fails to correct the breach by the deadline indicated in the Owner's notice.

The duties and obligations imposed by the Contract Documents and the rights and remedies available thereunder are in addition to, and not a limitation of, any duties, obligations, rights and remedies otherwise imposed or available by law.

20. CONTRACT WORKHOURS AND SAFETY STANDARDS ACT REQUIREMENTS (2 CFR § 200, Appendix II(E))

1. Overtime Requirements. No contractor or subcontractor contracting for any part of the contract work which may require or involve the employment of laborers or mechanics shall require or permit any such laborer or mechanic, including watchmen and guards, in any workweek in which he or she is employed on such work to work in excess of forty hours in such workweek unless such laborer or mechanic receives compensation at a rate not less than one and one-half times the basic rate of pay for all hours worked in excess of forty hours in such workweek.

2. Violation; Liability for Unpaid Wages; Liquidated Damages. In the event of any violation of the clause set forth in paragraph 1 of this clause, the contractor and any subcontractor responsible therefor shall be liable for the unpaid wages. In addition, such contractor and subcontractor shall be liable to the United States (in the case of work done under contract for the District of Columbia or a territory, to such District or to such territory), for liquidated damages. Such liquidated damages shall be computed with respect to each individual laborer or mechanic, including watchmen and guards, employed in violation of the clause set forth in paragraph 1 of this clause, in the sum of $10 for each calendar day on which such individual was required or permitted to work in excess of the standard workweek of forty hours without payment of the overtime wages required by the clause set forth in paragraph 1 of this clause.

3. Withholding for Unpaid Wages and Liquidated Damages. The Federal Aviation Administration or the Owner shall upon its own action or upon written request of an authorized representative of the Department of Labor withhold or cause to be withheld, from any monies payable on account of work performed by the contractor or subcontractor under any such contract or any other Federal contract with the same prime contractor, or any other federally assisted contract subject to the Contract Work Hours and Safety Standards Act, which is held by the same prime contractor, such sums as may be determined to be necessary to satisfy any liabilities of such contractor or subcontractor for unpaid wages and liquidated damages as provided in the clause set forth in paragraph 2 of this clause.

4. Subcontractors. The contractor or subcontractor shall insert in any subcontracts the clauses set forth in paragraphs 1 through 4 and also a clause requiring the subcontractor to include these clauses in any lower tier subcontracts. The prime contractor shall be responsible for compliance by any subcontractor or lower tier subcontractor with the clauses set forth in paragraphs 1 through 4 of this clause.

21. SEISMIC SAFETY (49 CFR Part 41)

N/A

22. RIGHT TO INVENTIONS (2 CFR § 200 Appendix II(F), 37 CFR § 401)

N/A

23. **CERTIFICATION OF BIDDER REGARDING TAX DELINQUENCY AND FELONY CONVICTIONS** (Sections 415 and 416 of Title IV, Division L of the Consolidated Appropriations Act, 2014, DOT Order 4200.6)

The bidder must complete the following two certification statements. The applicant must indicate its current status as it relates to tax delinquency and felony conviction by inserting a checkmark (√) in the space following the applicable response. The bidder agrees that, if awarded a contract resulted from this solicitation, it will incorporate this provision for certification in all lower tier subcontracts.

Certifications

(1) The bidder represents that it is ( ) is not ( ) a corporation that has any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability.

(2) The bidder represents that it is ( ) is not ( ) a corporation that was convicted of a criminal violation under any Federal law within the preceding 24 months.

Note: If a bidder responds in the affirmative to either of the above representations, the bidder is ineligible to receive an award unless the Sponsor has received notification from the agency suspension and debarment official (SDO) that the SDO has considered suspension or debarment and determined that further action is not required to protect the Government's interests. The bidder therefore must provide information to the Sponsor about its tax liability or conviction to the Sponsor, who will then notify MoDOT and/or the FAA, which will then notify the agency's SDO to facilitate completion of the required considerations before award decisions are made.

Term Definitions:

Felony Conviction: Felony conviction means a conviction within the preceding twenty-four (24) months of a felony criminal violation under any Federal law and includes conviction of an offense defined in a section of the U.S. code that specifically classifies the offense as a felony and conviction of an offense that is classified as a felony under 18 U.S.C. § 3559.

Tax Delinquency: A tax delinquency is any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability.

PART B
DBE ADMINISTRATION

1. **Eligibility of DBE's:** Only those firms currently certified as DBEs by the Missouri Department of Transportation (MoDOT), City of St. Louis, Metro, City of Kansas City, and Kansas City Area Transportation Authority are eligible to participate as DBEs on this contract. A list of these firms are available on MoDOT's Office of External Civil Rights webpage at the following address:

   http://www.modot.mo.gov/business/contractor_resources/External_Civil_Rights/DBE_program.htm.

2. **Counting DBE Participation Towards DBE Goals:** DBE participation toward attainment of the goal will be computed on the basis of the subcontract prices agreed to between the contractor and subcontractors for the contract items or portions of items being sublet, as documented in the Proposal Form. Credit will only be given for use of DBEs that are certified or accepted according to this specification. DBE participation shall be counted toward meeting the DBE goal in accordance with the following:

   a. **Commercially Useful Function:** The Sponsor shall count toward the DBE goal only those expenditures to DBEs that perform a commercially useful function in the work of the contract. A DBE performs a commercially useful function when it is responsible for execution of a distinct element of work by actually performing, managing, and supervising that work. To determine if a DBE is performing a commercially useful function, the amount of work subcontracted, industry practices, and other relevant factors will be evaluated. If consistent with industry practices, a DBE shall enter into a subcontract or other contractual written agreement. A DBE Contractor may subcontract a portion of the work up to the amount allowed under standard subcontracting contract provisions of normal industry practices. A DBE is presumed not to be performing a commercially useful function if the DBE is performing outside these guidelines.

   b. **Materials and Supplies:** The Sponsor shall count toward the DBE goal the expenditures for materials and supplies obtained from DBE suppliers and manufacturers as described below. The DBEs must assume the actual and contractual responsibility for the provision of the materials and supplies:

      (1) The entire expenditure to a DBE manufacturer will be counted toward the DBE goal. A manufacturer must operate or maintain a factory or establishment that produces on the premises the materials or supplies that are obtained by the contractor.

      (2) Sixty percent of expenditures to a DBE regular dealer will be counted toward the DBE goal. A regular dealer must perform a commercially useful function in the supply process, including buying the materials or supplies, maintaining an inventory, and regularly selling materials to the public. Bulk items such as steel, cement, gravel, stone, and petroleum products need not be kept in stock, but the dealer must own or operate distribution equipment.

      (3) No credit will be given toward the DBE goal if the prime contractor makes a direct payment to a non-DBE material supplier. However, it will be permissible for a material supplier to invoice the prime contractor and the DBE jointly and be paid by the prime contractor making remittance to the DBE firm and material supplier jointly.

      (4) No credit toward the DBE goal will be given for the cost of materials or equipment used in a DBE firm's work when those costs are paid by a deduction from the prime contractor's payment(s) to the DBE firm.

   c. **Work Classifications:** DBE credit will count toward the contractual goal only for work actually performed by the DBE firm and within the Standard Industry Classification (SIC) code approved for that firm. The credit will be counted in the following manner:

(1) Manufacturer: Credit is given for 100 percent of the value paid for materials furnished which become a permanent part of the project. A manufacturer is a firm that owns and operates the facilities to produce a product required by the project and purchased by the contractor.

(2) Supplier: Credit is given for 60 percent of the value paid for materials furnished which becomes a permanent part of the project. A supplier sells goods to the general public and maintains an inventory at an owned or leased warehouse or store. Bulk items such as steel, petroleum projects, or rock do not have to be maintained in an on-site inventory. Credit will not be given for the cost of the materials and separate credit for the hauling of those same materials. Transportation of the materials is deemed part of the total cost.

(3) Broker: Credit is given for 100 percent of the **fees** or **commission** received by the DBE firm for materials purchased, services provided, or equipment secured and resold to the contractor. Fees or commissions are defined as the difference between what the DBE firm paid for the materials purchased, services provided, or equipment secured and the price paid by the contractor to the DBE firm for those items. A broker does not manufacture or supply on a regular basis.

(4) Trucker: Credit is given for 100 percent of the amount paid to the DBE trucker if that trucking is performed by the DBE, with employees of the DBE, using equipment owned or long-term leased by the DBE. However, if the DBE firm uses leased trucks, at least one truck owned by the firm **must** be used on the project.

Full credit will not be given for leased trucks unless they are leased on a long-term basis from another DBE firm, DBE owner operators, or a recognized commercial leasing operation. Firms licensed by the Missouri Public Service Commission as leasing agents qualify as a recognized leasing operation. Lease of trucks from the prime contractor will not be credited toward the DBE goal, other than possibly the portion constituting broker fees and commissions. This type of relationship will be subject to strict scrutiny.

All trucks used must be labeled clearly and visibly with a sign indicating the firm owning or leasing the vehicle. MoDOT will require submittal of a truck roster report, including ownership and vehicle identification information, on a regular basis. MoDOT project office or other designated personnel will review the rosters for verification and will monitor the trucks operating on the project. MoDOT will conduct random verification and report any irregularities to the External Civil Rights Unit for review.

In order for the use of a DBE trucker to be credited for the delivered price of materials supplies, the trucker must be certified as a supplier or manufacturer of the material, responsible for the quality standards of the material, negotiating the material price, payment, and select the source.

(a) Owner-Operator Trucking: The Sponsor shall count toward the DBE goal, the entire delivery fee paid to DBE owner-operators performing trucking for the contractor, if they appear on the contractor's payroll and separate records are furnished to the Sponsor documenting the expenditures. The records shall include for each owner-operator: their social security number; driver's license number; vehicle registration number; current vehicle license number; truck number; and a complete record of the contract fees paid to them.

If the DBE firm uses owner-operators to supplement their owned trucks, the DBE must be responsible for management and supervision of the entire trucking operation. The trucking arrangement or contract ***cannot*** be a contrived arrangement to meet the DBE goal. The DBE will be considered a broker, and only fees or commissions received will count toward the goal, if the DBE is not in full control, or does not have employees or trucks on the project.

d. **Joint Venture:** When a joint venture contract is involved, the Sponsor shall count towards the DBE goal that portion of the contract total dollar value equal to the percentage of ownership and control of each DBE firm within the joint venture. Such crediting is subject to the sponsor's acceptance of the joint

venture agreement. The Bidder must furnish the joint venture agreement with the DBE Participation Form. The joint venture agreement must include a detailed breakdown of the following:

(1) Contract responsibility of the DBE for specific contract items of work,
(2) Capital participation by the DBE,
(3) Specific equipment to be provided by the DBE,
(4) Specific responsibilities of the DBE regarding control of the joint venture,
(5) Specific workers and skills to be provided by the DBE, and
(6) Percentage distribution to the DBE of the projected profit or loss incurred by the joint venture.

The joint venture must be certified in writing by MoDOT.

3. **Award Documentation and Procedure:** All Bidders shall certify in the Proposal Form their intent to meet or exceed the established goal or to demonstrate good faith efforts to meet the goal. Failure to make such certification or failure to demonstrate good faith efforts will render a bid non-responsive and will not be considered.

   a. **DBE Participation Information:** All Bidders must complete the required DBE participation information in the Proposal Form, when a DBE goal has been established for the project. The information shall demonstrate the contractor's intended participation by certified DBE's. The information furnished shall consist of:

      (1) The names and addresses of DBE firms that will participate in the contract;
      (2) A description of the work that each DBE will perform;
      (3) The dollar amount of the participation of each DBE firm participating;
      (4) Written documentation (signed contract proposal) of the bidder/offeror's commitment to use a DBE subcontractor whose participation it submits to meet a contract goal;
      (5) If the contract goal is not met, evidence of good faith efforts (see paragraph c below).

   (Note: After award of the contract, the MoDOT External Civil Rights Office will contact by mail each DBE firm participating in the contract, requesting written confirmation from the DBE that it is participating in the contract as provided in the Proposal Form.)

   b. **Sponsor Evaluation:** In selecting the lowest responsible bidder, the Sponsor and MoDOT will evaluate the DBE information provided with the bid. The Sponsor and MoDOT may request additional DBE information. Prior to awarding the contract, the Sponsor will verify verbally and/or in writing that the information submitted by the apparent successful bidder is accurate and complete.

   c. **Good Faith Efforts:** If the bidder is unable to meet the DBE goal, the bidder must submit in and as part of its bid, written documentation and evidence of good faith efforts taken to meet the goal. Good faith efforts conducted after the bid opening will not be considered adequate to fulfill these bid requirements. Good faith efforts may include but are not limited to:

      (1) Efforts to select portions of the work for performance by DBEs, in order to increase the likelihood of achieving the DBE goal. This can include, but is not limited to, breaking down contracts into economically feasible units to facilitate DBE participation. Selection of portions of work shall be at least equal to the DBE goal.
      (2) Written notification to individual DBEs likely to participate in the contract sent at least 7 calendar days prior to the bid opening. The notification shall list specific items or types of work and shall be sent to a reasonable number of DBEs qualified to participate in the contract.
      (3) Efforts to negotiate with DBEs for specific items of work including:

         (a) Names, addresses, and telephone numbers of DBEs who were contacted, the dates of initial contact and information on further contacts made to determine with certainty if the DBEs were interested. Personal or phone contacts are expected;
         (b) Description of the information provided to the DBEs regarding the plans, specifications and estimated quantities for portions of the work to be performed;

(c) Individual statements as to why agreements with DBEs were not reached; and
(d) Information on each DBE contacted but rejected and the reasons for the rejection.

(4) Efforts to assist the DBE's that need assistance in obtaining bonding, insurance, or lines of credit required by the contractor.
(5) Documentation that qualified DBEs are not available or not interested.
(6) Advertisements in general circulation media, trade association publications and disadvantaged-focused media concerning subcontracting opportunities.
(7) Efforts to use the services of available disadvantaged community organizations; disadvantaged contractor's groups; local, state and federal disadvantaged business assistance offices; and other organizations that provide assistance in recruitment and placement of DBEs.

The demonstration of good faith efforts by the contractor must prove the contractor actively and aggressively sought out DBEs to participate in the project. The following actions would not be considered acceptable reasons for failure to meet the DBE goal and would not constitute a good faith effort:

(1) The DBE was unable to provide adequate performance and/or payment bonds.
(2) A reasonable DBE bid was rejected based on price.
(3) The DBE would not agree to perform the subcontract work at the prime contractor's unit bid price.
(4) Union versus non-union status of the DBE firm.
(5) The prime contractor would normally perform all or most of the work included in this contract.
(6) The prime contractor solicited DBE participation by mail only.

Should MoDOT and the city determine that the bidder's submitted documentation on good faith efforts are inadequate, the bidder must make a written request for administrative reconsideration within 2 working days of the notification on lack of good faith efforts. That notice may be faxed or emailed to:

Missy Stuedle
External Civil Rights Director
P. O. Box 270
Jefferson City, Missouri 65102
Telephone: (573) 526-2978
Fax: (573) 526-0558
E-Mail: missy.stuedle@modot.mo.gov

The Administrative Reconsideration Committee will include 3 individuals MoDOT deems appropriate and the members will be familiar with the DBE program, bidding, construction, and/or contracting matters. The External Civil Rights Unit will process the request, including providing documentation of the determination, and notify the Administrative Reconsideration Committee of the request for review; however, neither the administrator, nor any member of MoDOT that had a part in the initial determination will be a part of the reconsideration determination.

As part of this reconsideration, the bidder will have the opportunity to provide written documentation or argument concerning the issue of whether it met the goal or made adequate good faith efforts to do so to the committee. The bidder may choose to meet in person with the Administrative Reconsideration Committee to discuss the finding. MoDOT and the city will notify the bidder, in writing of the decision on reconsideration, explaining the basis for finding that the bidder did or did not make adequate good faith efforts to meet the goal. The result of the reconsideration process is not administratively appealable to the USDOT.

4. **Post Award Compliance**: If the contract is awarded on less than full DBE goal participation, the contractor is not relieved of the responsibility to make a determined effort to meet the full goal amount during the life of the contract. In such a case, the contractor shall continue good faith efforts throughout the life of the contract to increase the DBE participation to meet the contract goal.

If a DBE is unwilling or unable to perform the work specified, the contractor shall request from the Sponsor and MoDOT, relief from the obligation to use that DBE. Efforts will be made by the contractor to acquire from the DBE a letter which states the reason the DBE is unwilling or unable to complete its obligations under the project. If this results in a DBE contract shortfall, the contractor shall immediately take steps to obtain another certified DBE to perform an equal dollar value of allowable credit. If a new DBE cannot be found, the contractor shall submit evidence of good faith efforts within 15 calendar days of the request for relief. The contractor shall submit the new DBE's name, address, work items and the dollar amount of each item. The sponsor and MoDOT shall approve the new DBE before the DBE starts work.

If the contractor fails to conform to the approved DBE participation or if it becomes evident that the remaining work will not meet the approved participation, then the contractor shall submit evidence showing either how the contractor intends to meet the DBE participation, or what circumstances have changed affecting the DBE participation. If the sponsor is not satisfied with the evidence, then liquidated damages may be assessed for the difference between the approved and actual DBE participation.

5. **Records and Reports**: The contractor and all of its subcontractors shall keep records as necessary to determine compliance with the DBE obligations. The records shall include but are not limited to:

    a. Record of DBE Participation: The names of disadvantaged and non-disadvantaged subcontractors, regular dealers, manufacturers, consultant and service agencies; the type of work or materials or services performed on or incorporated in the project; and the actual value of such work.

    b. Efforts to Utilize DBE Firms: Documentation of all efforts made to seek out disadvantaged contractor organizations and individual disadvantaged contractors for work on this project. All correspondence, personal contacts, telephone calls, etc., to obtain the services of DBEs should be documented.

    c. Final DBE Certification: Upon completion of the individual DBE firm's work, the prime contractor shall submit a certification letter attesting to the actual work performed by the DBE firm and the amount paid the DBE firm. This certification letter shall be signed by both the prime contractor and the DBE firm. A sample certification letter is available on the MoDOT Aviation website.

PART C
LOCAL PROVISIONS

C-01	Contractor's Insurance
C-02	Utilities
C-03	Legal Holidays
C-04	Clean Up
C-05	Project Meetings and Coordination
C-06	Liquidated Damages for Delay
C-07	Care of Work
C-08	Quality Assurance/Materials Testing
C-09	Record Documents
C-10	Contractor/Subcontractor/Supplier Legal Disputes
C-11	General Guaranty
C-12	Contractor's Release and Affidavit
C-13	Submittals
C-14	Test Borings/Subsurface Information

SECTION C – LOCAL TERMS AND CONDITIONS

C-01 CONTRACTOR'S INSURANCE

Contractor shall obtain insurance of the types and in the amounts described below. The insurance shall be written by insurance companies and on forms acceptable to Owner.

Owner and Garver, LLC shall be included as an insured under the CGL, (using ISO Additional Insured Endorsement CG 20 10 11 85 or a substitute providing equivalent coverage), and under the commercial automobile liability (using ISO Additional Insured Endorsement CA 2048 or a substitute providing equivalent coverage), and commercial umbrella, if any. This insurance, including insurance provided under the commercial umbrella, if any, shall apply as primary and non-contributory insurance with respect to any other insurance or self-insurance programs afforded to, or maintained by, Owner.

C-01.1 Commercial General and Umbrella Liability Insurance: Contractor shall maintain commercial general liability (CGL) and, if necessary, commercial umbrella insurance, with a limit of not less than $2,000,000 each occurrence. If such CGL insurance contains a general aggregate limit, it shall apply separately to the Project.

CGL insurance shall be written on ISO occurrence form CG 20 10 (11-85) (or a substitute combination of the following forms CG 20 10 (10-01) and CG 20 37 (10-01) providing equivalent coverage) and shall cover liability arising from premises, operations, independent contractors, products-completed operations, personal injury and advertising injury and liability assumed under an insured contract.

There shall be no endorsement or modification of the CGL limiting the scope of coverage for liability arising from pollution, explosion, collapse, underground property damage, or amending the contractual coverage in the ISO occurrence form.

CGL insurance shall be written with an ISO form CG 25 03 05 09 Designated Construction Project(s) General Aggregate Limit or a substitute form providing equivalent coverage.

C-01.2 Continuing CGL Coverage: Contractor shall maintain commercial general liability (CGL) and, if necessary, commercial umbrella liability insurance, with a limit of not less than $441,130 per person and $2,940,868 per each occurrence for at least 3 years following substantial completion of the Work.

Continuing commercial umbrella coverage, if any, shall include liability coverage for damage to the insured's completed Work equivalent to that provided under ISO form CG 00 01.

C-01.3 Commercial Auto and Umbrella Liability Insurance: Contractor shall maintain business auto liability and, if necessary, commercial umbrella liability insurance with a limit of not less than $1,000,000 each accident.

Such insurance shall cover liability arising out of any auto (including owned, hired and non-owned autos).

Commercial auto coverage shall be written on ISO form CA 00 01, CA 00 05, CA 00 12, CA 00 20, or a substitute form providing equivalent liability coverage. If necessary, the policy shall be endorsed to provide contractual liability coverage equivalent to that provided in the 1990 and later editions of CA 00 01.

If the Contract Documents require Contractor to remove and haul hazardous waste from the Project site, or if the Project involves such similar environmental exposure, pollution liability coverage equivalent to that provided under the ISO Pollution Liability-Broadened Coverage for Covered Autos Endorsement (CA 99 48) shall be provided, and the Motor Carrier Act Endorsement (MCS 90) shall be attached.

C-01.4 Workers' Compensation Insurance: Contractor shall maintain workers' compensation and employer's liability insurance.

The employer's liability, and if necessary commercial umbrella, limits shall not be less than $500,000 each accident for bodily injury by accident or $500,000 each employee for bodily injury by disease.

If Contractor leases its employees, the alternate employer endorsement (WC 00 03 01 A) shall be attached showing Owner in the schedule as the alternate employer.

Where applicable, U.S. Longshore and Harborworkers Compensation Act Endorsement shall be attached to the policy.

Where applicable, Nonappropriated Fund Instrumentalities Act (NFIA) shall be attached to the policy. NFIA extends the coverage of the Longshore and Harbor Workers' Compensation Act to civilian employees working on United States military bases throughout the world who are not paid with funds appropriated by Congress. These employees, working in facilities operated for the comfort, contentment, and improvement of armed forces personnel, are instead compensated with funds generated from earnings of their facility.

Where applicable, Outer Continental Shelf Lands Act Endorsement shall be attached to the policy.

Where applicable, the Maritime Coverage Endorsement shall be attached to the policy.

If project is located in a state where workers compensation is secured via monopolistic state funds, include evidence of the "Stop Gap" endorsement to the general liability policy.

C-01.5 Property Insurance: If applicable, Contractor shall purchase and maintain property insurance for the Work. Such insurance shall be written in an amount at least equal to the initial contract sum as well as subsequent modifications of that sum. The insurance shall apply on a replacement cost basis. If the insurance obtained in compliance with this paragraph is builders risk insurance, coverage shall be written on a completed value form.

The property insurance as required above shall name as insureds the Owner, Contractor, and all subcontractors and sub-subcontractors on the Project.

C-01.6 Primary and Non-contributory: Contractor agrees that the insurance listed above, including insurance provided under the commercial umbrella, if any, shall apply as primary and non-contributory insurance with respect to any other insurance or self-insurance programs afforded to, or maintained by, Owner.

C-01.7 Waiver of Subrogation: Contractor waives all rights against the Owner and Garver, LLC and its agents, officers, directors and employees for recovery of damages to the extent these damages are covered by the commercial general liability, commercial umbrella liability insurance, automobile liability insurance and workers compensation insurance maintained pursuant to paragraph C-01 of this agreement.

C-01.8 No Implied Waiver: Contractor shall furnish certifications matching the coverage requirements. Failure of Owner or Engineer to demand such certificate or other evidence of full compliance with these insurance requirements or failure of Owner or Engineer to identify a deficiency from evidence that is provided shall not be construed as a waiver of the contractors obligations to furnish and maintain such insurance, or as a waiver to the enforcement of any of the provisions at a later date.

Any waiver of the contractor's obligation to furnish such certificate or maintain such evidence must be by written change order and signed by a Managing Member (Officer) of the Engineer and the Owner.

C-01.9 Cancellation, Non-Renewal, and/or Impairment Notification: The Contractor shall not cause any insurance policy to be cancelled or permit it to lapse and all insurance policies shall include an endorsement to the effect that the insurance policy or certificate shall not be subject to cancellation or to a reduction in the required limits of liability or amounts of insurance until notice has been mailed to the Owner and Engineer, stating the date when such cancellation or reduction shall be effective, which date shall not be less than (60) days after such notice.

The amount shown in the bid item for the Owner's Protective Insurance shall include that amount of additional premium required for obtaining Owner's and Engineer's Protective Liability insurance for the Owner and Garver, LLC. The Engineer has the right to request justification from the contractor for the full amount of the cost included under the items "Owner's Protective Insurance".

Notice shall be sent via email and regular mail to the following persons and addresses:

Owner:
City of Clinton, Missouri
Ms. Christy Maggi
City Administrator
105 E. Ohio
Clinton, Missouri 64735
(660) 885-6121
CMaggi@CITYOFCLINTONMO.COM

Garver:
Mr. Jason Fuehne, PE
Project Manager
7301 West 129th Street, Suite 330
Overland Park, Kansas 66213
(913) 424-8878
JCFuehne@GarverUSA.com

C-01.10 Sample Certificate of Liability Insurance:

ACORD®

CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY) (must be dated)

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER Agency Name Agency Address www.stephens.com	CONTACT NAME: Agency contact PHONE (A/C, No, Ext): Agency ph# FAX (A/C, No): E-MAIL ADDRESS: Agency contact email address INSURER(S) AFFORDING COVERAGE NAIC # INSURER A: Carrier Name (AM Best Rating) INSURER B: INSURER C: INSURER D: INSURER E: INSURER F:
INSURED Named Insured on the policies	

COVERAGES **CERTIFICATE NUMBER:** **REVISION NUMBER:**

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSR	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS	
A	GENERAL LIABILITY							
	✓ COMMERCIAL GENERAL LIABILITY	X	X	XXXXXXXXXX			EACH OCCURRENCE $	5,000,000
	CLAIMS-MADE ✓ OCCUR						DAMAGE TO RENTED PREMISES (Ea occurrence) $	300,000
							MED EXP (Any one person) $	10,000
							PERSONAL & ADV INJURY $	1,000,000
	GEN'L AGGREGATE LIMIT APPLIES PER:						GENERAL AGGREGATE $	5,000,000
	POLICY ✓ PRO-JECT LOC						PRODUCTS - COMP/OP AGG $	5,000,000
							$	
	AUTOMOBILE LIABILITY						COMBINED SINGLE LIMIT (Ea accident) $	1,000,000
	✓ ANY AUTO	X	X	XXXXXXXXXXX			BODILY INJURY (Per person) $	
	ALL OWNED AUTOS / SCHEDULED AUTOS						BODILY INJURY (Per accident) $	
	✓ HIRED AUTOS / ✓ NON-OWNED AUTOS						PROPERTY DAMAGE (Per accident) $	
							$	
							$	
	✓ UMBRELLA LIAB ✓ OCCUR	X	X	XXXXXXXXXX			EACH OCCURRENCE $	
	EXCESS LIAB CLAIMS-MADE			Umbrella / Excess only if needed to meet the required underlying General Liability limit			AGGREGATE $	
	DED RETENTION $ XXXXX						$	
							$	
							$	
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY Y/N						✓ WC STATU-TORY LIMITS OTH-ER	
	ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? N/A		X	XXXXXXXXXX			E.L. EACH ACCIDENT $	500,000
	(Mandatory in NH)						E.L. DISEASE - EA EMPLOYEE $	500,000
	If yes, describe under DESCRIPTION OF OPERATIONS below						E.L. DISEASE - POLICY LIMIT $	500,000
				XXXXXXXXXX				

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (Attach ACORD 101, Additional Remarks Schedule, if more space is required)

Owner & Garver, LLC shall be included as an Additional Insured by endorsement #CG2010(11/85) on the General Liability and #CA2048 on the Automobile and Umbrella or substitute endorsement providing equivalent coverage. Coverage shall be Primary and non-contributory with respect to any other insurance or self-insurance programs afforded to the Owner and Garver LLC. Waiver of Subrogation applies in favor of the Owner and Garver LLC on all policies. 60 day notice will be provided to the Owner and Garver LLC in the event of cancellation, non-renewal and/or impairment of the Contractor's policies.

CERTIFICATE HOLDER	CANCELLATION
Owner and Garver LLC	SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS. AUTHORIZED REPRESENTATIVE (must be signed by the C...actor's Insurance Agent)

© 1988-2010 ACORD CORPORATION. All rights reserved.

ACORD 25 (2010/05) The ACORD name and logo are registered marks of ACORD

CERT NO.: 15475674 Kathy Jones 2/11/2013 10:58:41 AM Page 1 of 1

C-02 UTILITIES

All work in this contract shall be in accordance with the Missouri Underground Facilities Damage Prevention Act. The Contractor shall abide by the most current edition of this Act.

Underground utilities exist within and adjacent to the limits of construction. An attempt has been made to locate these utilities on the plans. However, all existing utilities may not be shown and the actual locations of the utilities may vary from the locations shown.

The Contractor shall be responsible for the protection of all existing utilities, structures, equipment, or improvements crossed by or adjacent to his construction operations. Where existing utilities, service lines, structures, equipment, etc. are cut, broken, or damaged, the Contractor shall replace or repair immediately these items with the same type of original material and construction or better, at his own expense to the satisfaction of the Owner and the Engineer. After damage discovery, the Contractor shall immediately coordinate with the Owner and the Engineer on the complete repair and/or replacement work required. Following written notice of work required, the Contractor shall expeditiously begin and finish this work with all labor and materials required. All repair and/or replacement work, labor, and materials shall be supplied and installed by the Contractor. If the Contractor fails to promptly perform the repair work and correct all deficiencies, the Owner shall have the option of remedying the defects and any expenses incurred by the Owner shall be withheld from the Contractor's payments.

The Contractor is aware of the provisions of the Overhead Power Line Safety Act, 319.075 to 319.090 RSMo, and agrees to comply with the provisions thereof. Contractor understands that it is their duty to notify any utility operating high voltage overhead lines and make appropriate arrangements with said utility if the performance of the project would cause any activity by Contractor or any other party within ten feet of any high voltage overhead line. To the fullest extent permitted by law, Contractor shall indemnify, hold harmless and defend the City, its officers, agents, and employees from and against all claims, damages, losses and expenses (including but not limited to attorney's fees) arising by reason of any act or failure to act, negligent or otherwise, of Contractor, of any subcontractor (meaning anyone, including but not limited to contractors having a contract with Contractor or a subcontract for part of the services), of anyone directly or indirectly employed by Contractor or by any subcontractor, or of anyone for whose acts the Contractor or its subcontractor may be liable, in connection with any claims arising under the Overhead Power Line Safety Act.

C-03 LEGAL HOLIDAYS

Holidays that shall be observed are the following: New Year's Day (January 1); Dr. Martin Luther King Jr.'s Birthday (3rd Monday in January); President's Day (3rd Monday in February); Memorial Day (last Monday in May); Independence Day (July 4); Labor Day (1st Monday in September); Columbus Day (2nd Monday in October); Thanksgiving Day (4th Thursday in November); Day after Thanksgiving (Friday following Thanksgiving); Christmas Eve (December 24); and Christmas Day (December 25). If a holiday falls on a Saturday or Sunday, the observed day shall be the Friday preceding the Saturday or the Monday following the Sunday. No construction observation will be furnished on legal holidays or Sundays, except in an emergency. The Contractor shall observe these legal holidays and all Sundays, and no work shall be performed on these days except in an emergency. Calendar day contract time includes delays for all holidays. Refer to Section C-06 for more information.

C-04 CLEAN UP

From time to time, the Contractor shall clean up the site, including any work areas at the airport, in order that the site presents a neat appearance and the progress of the work not be impeded. One such period of clean up shall immediately precede final inspection.

Immediately following acceptance of the work by the Owner, the Contractor shall remove all temporary plant, equipment, surplus materials, and debris resulting from his operations, and leave the site in a condition fully acceptable to the Owner.

C-05 PROJECT MEETINGS AND COORDINATION

A preconstruction conference will be called by the Engineer at a time convenient to the Owner and before the issuance of the "Notice to Proceed". The Engineer and the Contractor and such subcontractors as the Contractor may desire shall attend this meeting with the Owner.

The Owner and/or Engineer will call such coordination conferences as may seem expedient to him for the purpose of assuring coordination of the work covered by this Contract. The Contractor shall attend all such conferences. This in no way relieves the Contractor of his responsibility to fully coordinate his work under this Contract.

C-06 LIQUIDATED DAMAGES FOR DELAY

The number of calendar days allowed for completion of the project is stipulated in the Proposal and in the Contract and shall be known as the Contract Time. The Contractor agrees that time is a critical element for this Contract. Loss will accrue to the Owner due to delayed completion of the work; and the cost to the Owner of the administration of the Contract, including engineering, inspection, and supervision, will be increased as the time occupied in the work is lengthened. The Contractor agrees that for each day of delay beyond the number of calendar days herein agreed upon for the completion of the work herein specified and contracted for, the Owner may withhold, permanently, from the Contractor's total compensation, the sum of One Thousand Dollars ($1,000.00) as stipulated damages for each day of such delay. Should the amount otherwise due the Contractor be less than the amount of such ascertained and liquidated damages, the Contractor and his Surety shall be liable to the Owner for such deficiency.

It is understood and agreed by and between the Owner and the Contractor that the time of completion herein set out is a reasonable time. The Contractor shall perform fully, entirely, and in an acceptable manner, the work contracted for within the contract time stated in the Contract. The contract time shall be counted from ten days after the effective date of the "Notice to Proceed", or the date work commences, whichever occurs first; and shall include all Sundays, holidays, and non-work days. All calendar days elapsing between the effective dates of any orders of the Engineer for suspension of the prosecution of the work, due to the fault of the Contractor, shall be counted as elapsed contract time, and shall not be considered for an extension of time.

Extensions of time for completion, under the condition of 3(a) next below, will be granted; extensions may be granted under other stated conditions:

1. If the satisfactory execution and completion of the Contract shall require work or material in greater amounts or quantities than those set forth in the Contract, then the Contract time shall be increased in the same proportion as the additional work bears to the original work contracted for.

2. An average or usual number of inclement weather days, when work cannot proceed, is to be anticipated during the construction period and is not to be considered as warranting extension of time. These include days with a mean temperature lower than 32° F and days with more than 0.1" of precipitation. Days with more than 0.5" of precipitation are counted as two days. The days included in the contract time for Normal Weather-Related Events and holidays are as follows:

(On A Monthly Basis)

Month	Normal Weather-Related Events	Holidays
January	20	2
February	13	1
March	5	0
April	5	0
May	6	1
June	2	0
July	3	1
August	1	0

September	3	1
October	3	1
November	4	2
December	15	2

If, however, it appears that the Contractor is delayed by conditions of weather, outside of normal weather-related events detailed in the proceeding table, extensions of time may be granted.

3. Should the work under the Contract be delayed by other causes which could not have been prevented or contemplated by the Contractor, and which are beyond the Contractor's power to prevent or remedy, an extension of time may be granted. Such causes of delay shall include but not necessarily be limited to the following:

a. Acts of God, acts of the public enemy, acts of the Owner except as provided in these Specifications, fires, floods, epidemics, quarantine restrictions, strikes, freight embargoes, and unusually severe weather.

b. Any delays of Subcontractors or suppliers occasioned by any of the causes specified above.

The Contractor shall provide notice to the Engineer each week, in the form of written letter or e-mail, to document weather and site conditions and request certain days be deemed non-conducive due to weather or site conditions. At a minimum, reports shall contain average temperature, 24 hour rainfall and information source. The notice shall be received by the Engineer's representative by the close of business of each Tuesday for the previous week of contract time. Failure to provide the written documentation by the close of business each Tuesday shall result in all seven days of the previous week being deemed conducive. These notices shall serve as justification for whether or not an extension of time is granted, if merited. In case of disagreement between the representative of the Owner and the Contractor, as to the classification of any day, the matter shall be referred to the Owner whose decision shall be final.

If the Contractor finds it impossible for reasons beyond his control to complete the work within the Contract time as specified, or as extended in accordance with the provisions of this subsection, he may, at any time prior to the expiration of the Contract time as extended, make a written request to the Engineer for an extension of time setting forth the reasons which he believes will justify the granting of his request. The Contractor's plea that insufficient time was specified is not a valid reason for extension of time. If the Engineer finds that the work was delayed because of conditions beyond the control and without the fault of the Contractor, he may recommend to the Owner that the contract time be extended as conditions justify. If the Owner extends the contract, the extended time for completion shall then be in full force and effect, the same as though it were the original time for completion.

The amount of all extensions of time for whatever reason granted shall be determined by the Owner. In general, only actual and not hypothetical days of delay will be considered. The Owner shall have authority to grant additional extensions of time as the Owner may deem justifiable.

C-07 CARE OF WORK

The Contractor shall avoid damage, as a result of his operations, to existing sidewalks, streets, curbs, pavements, utilities (except those which are to be replaced or removed), adjoining property, equipment, etc., and he shall at his own expense completely repair any damage thereto caused by his operations, to the satisfaction of the Owner and Engineer. After damage discovery, the Contractor shall immediately coordinate with the Owner and the Engineer on the complete repair and/or replacement work required. Following written notice of work required, the Contractor shall expeditiously begin and finish this work with all labor and materials required. All repair and/or replacement work, labor, and materials shall be supplied and installed by the Contractor. If the Contractor fails to promptly perform the repair work and correct all

deficiencies, the Owner shall have the option of remedying the defects and any expenses incurred by the Owner shall be withheld from the Contractor's payments.

C-08 QUALITY ASSURANCE/MATERIALS TESTING

The Owner shall be responsible for quality assurance testing as stated in theses specifications; however, the Contractor shall be responsible for payment of any subsequent tests made necessary by previous unsatisfactory tests. In this event, the Owner's quality assurance representative shall conduct the additional testing and payment for such tests shall be directly deducted from the Contractor's payment. The Contractor shall pay for additional testing at the Owner's contract rate.

C-09 RECORD DOCUMENTS

The Contractor shall keep one record copy of all Specifications, Drawings, Addenda, Modifications, Shop Drawings and samples at the site, in good order, and annotated to show all changes made during the construction process. In addition, the Contractor shall note any differences between locations of underground existing facilities shown in the plans and the actual location located during construction. These record documents shall be available to the Engineer for examination and shall be delivered to the Engineer upon completion of the work.

C-10 CONTRACTOR/SUBCONTRACTOR/SUPPLIER LEGAL DISPUTES

Any fees, expenses, charges, fines or other costs borne by the Owner as a result of legal disputes or lawsuits between the contractor and his subcontractors, or between the contractor and his suppliers, shall be deducted from monies due or which may thereafter become due the contractor.

C-11 GENERAL GUARANTY

Neither the final certificate of payment nor any provision in the Contract nor partial or entire use of the improvements embraced in this contract by the Owner or the public shall constitute an acceptance of work not done in accordance with the Contract or relieve the Contractor of liability in respect to any express warranties or responsibility for faulty materials or workmanship. The Contractor shall promptly remedy any defects in the work and pay for any damage to other work resulting there, which shall appear within a period of 12 months from the date of final acceptance of the work. The Contractor will be responsible for all costs associated with construction observation and oversight for the repair work. The Owner will give notice of defective materials and work with reasonable promptness. In the event repair work is required, the Contractor shall remedy any defects and pay for any damage to other work resulting there, which shall appear within a period of 12 months from the date of the acceptance of the repair work.

C-12 CONTRACTOR'S RELEASE AND AFFIDAVIT

At the project's completion, the Contractor shall execute the attached Release and Lien Waiver to release all claims against the Owner arising under and by virtue of his Contract. The date of the Release shall be that agreed to for the final acceptance of the project with the Owner.

C-13 SUBMITTALS

The Contractor shall prepare and submit information required by the individual Specification sections sufficiently in advance of the related work to allow an appropriate review time by the Engineer. The types of submittals are indicated in the individual Specification sections.

During the preconstruction conference, the Contractor shall review his submittal schedule and procedures. The Contractor shall provide the following submittal package type:

1. Submit electronic submittals via email as PDF electronic files directly to the Engineer's designated representative, or post these PDF electronic files directly to the Engineer's FTP site specifically established for

this project. Electronic submittals shall be in Adobe Acrobat (*.PDF) format and shall be legible when printed.

Submittals shall be neat, organized, and easy to interpret. Assemble complete submittal package into a single indexed electronic file or hard cover bound book, incorporating submittal requirements of an individual Specification section, the transmittal form with unique submittal numbering system, and electronic links or tabs enabling navigation to each item. Unless approved otherwise by the Engineer, all submittals for the individual Specification section shall be submitted at one time.

Submittals must come directly from the Prime Contractor; submittals from subcontractors or suppliers will not be reviewed.

Incomplete submittals are unacceptable, will be considered nonresponsive, and will be returned for resubmittal without review. Faxed submittals or submittals with extremely small or otherwise unreadable print will not be accepted. Submittals not required by the Contract Documents will be returned by the Engineer without action.

The Contractor shall be responsible for payment of any subsequent submittal reviews beyond the second iteration of a specific item as indicated by the construction submittal log. In this event, the Owner's representative shall conduct the submittal review and payment for the submittal review shall be directly deducted from the Contractor's payment. The Contractor shall pay for additional submittal reviews at the Owner's contract rate.

The Contractor shall retain complete copies of submittals on project site. Use only final submittals that are marked with approval notation from Engineer's submittal review stamp with comments form.

Resubmittals shall continue the unique, sequential, submittal numbering system. Resubmittals without unique numbering, example resubmittals transmitted as 005A or 005REV, are unacceptable and will be returned un-reviewed.

C-14 TEST BORINGS/SUBSURFACE INFORMATION

A geotechnical investigation and soils report have been completed for the project area and are available upon request. This information can be obtained by contacting the Engineer.

Soil characteristics provided in any soil reports, or as shown on boring logs, are representative only at the location of the sample taken, and neither the Owner, Engineer nor Engineer's consultants will be responsible for variations in the soil characteristics at other locations. Any subsurface information or geotechnical reports made available to Contractor was obtained and intended for the Owner's design and estimating purposes only. Such reports and drawings are not Contract Documents.

The Contractor may not rely upon or make any claim against Owner, Engineer, or Engineer's Consultants with respect to (1) the completeness of such reports and drawings for Contractor's purposes, including, but not limited to, any aspects of the means, methods, techniques, sequences, and procedures of construction to be employed by the Contractor and safety precautions and programs incident thereto, (2) other data, interpretations, opinions, and information contained in such reports or shown or indicated in such drawings, or (3) any Contractor interpretation or other conclusion drawn from any data, interpretations, opinions, or information.

If in any case, the recommendations set forth in the Geotechnical Report conflict with the requirements set forth in these Contract Documents, the requirements in the Contract Documents shall take precedent.

C-15 OSHA TRAINING

All Contractors entering into contracts for public works shall require all employees on the work site to complete ten hours of training pursuant to Section 292.675 RSMo within sixty days of beginning work on the project.
Any Contractor violating the training requirements of Section 292.675 RSMo shall forfeit as a penalty to the public body on whose behalf the contract is made the sum of $2,500.00 plus $100.00 for each violating employee, per day. Theses penalties shall accrue on expiration of the time limits set forth in Sections 292.675.2 and 292.675.3 RSMo.

All sums due for such forfeiture and penalty shall be withheld from payments owed under the Contract. No payment otherwise due shall be made during any term of uncorrected violations of Section 292.675 RSMo and no interest or penalties shall accrue on any such unmade payment.

END OF LOCAL PROVISIONS

RELEASE OF LIEN

FROM: Contractor's Name:_____

Address: _____

TO: Owner's Name:_____

Address: _____

DATE OF CONTRACT: _____

Upon receipt of the final payment and in consideration of that amount, the undersigned does hereby release the Owner and its agents from any and all claims arising under or by virtue of this Contract or modification thereof occurring from the undersigned's performance in connection with the

_____

project.

Contractor's Signature: _____

Title: _____

Subscribed and sworn to before me this _____ day of _____, 20____.

_____
Notary Public

My Commission Expires:

_____

CONTRACTOR'S AFFIDAVIT

FROM: Contractor's Name: _____

Address: _____

TO: Owner's Name: _____

Address: _____

DATE OF CONTRACT: _____

I hereby certify that all claims for material, labor, and supplies entered into contingent and incident to the construction or used in the course of the performance of the work on the

Clinton Regional Airport Apron Design Phases 2 Through 6

project have been fully satisfied.

Contractor's Signature: _____

Title: _____

Subscribed and sworn to before me this _____ day of _____, 20____.

_____
Notary Public

My Commission Expires:

_____

The Surety Company consents to the release of the retained percentage on this project with the understanding that should any unforeseen contingencies arise having a right of action on the bond that the Surety Company will not waive liability through the consent to the release of the retained percentage.

Dated: _____

Surety Company: _____

By: _____
Resident Agent, State of Missouri

PART D
FEDERAL AND STATE WAGE RATES

"General Decision Number: MO20210001 02/12/2021

Superseded General Decision Number: MO20200001

State: Missouri

Construction Types: Heavy and

Highway Counties: Missouri

Statewide.

HEAVY AND HIGHWAY CONSTRUCTION PROJECTS

Note: Under Executive Order (EO) 13658, an hourly minimum wage of $10.95 for calendar year 2021 applies to all contracts
subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2015. If this contract is covered by the EO, the contractor must pay all workers in any classification listed on this wage determination at least $10.95 per hour (or the applicable wage rate listed on this wage determination, if it is higher) for
all hours spent performing on the contract in calendar year 2021. If this contract is covered by the EO and a
classification considered necessary for performance of work on the contract does not appear on this wage determination, the
contractor must pay workers in that classification at least the wage rate determined through the conformance process set forth in 29 CFR 5.5(a)(1)(ii) (or the EO minimum wage rate,if it is
higher than the conformed wage rate). The EO minimum wage rate will be adjusted annually. Please note that this EO applies to the above-mentioned types of contracts entered into by the
federal government that are subject to the Davis-Bacon Act itself, but it does not apply to contracts subject only to the Davis-Bacon Related Acts, including those set forth at 29 CFR 5.1(a)(2)-(60). Additional information on contractor
requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Modification Number	Publication Date
0	01/01/2021
1	02/05/2021
2	02/12/2021

CARP0002-002

05/01/2019 ST. LOUIS

COUNTY AND CITY

	Rates	Fringes
Carpenters	$ 38.02	17.77

--- CARP0005-006 05/03/2015

CASS (Richards-Gebauer AFB ONLY), CLAY, JACKSON, PLATTE AND RAY COUNTIES

	Rates	Fringes
Carpenters:		
CARPENTERS & LATHERS	$ 36.34	15.55
MILLWRIGHTS & PILEDRIVERS	$ 36.34	15.55

--- CARP0011-001 05/01/2019

	Rates	Fringes
Carpenter and Piledriver		
ADAIR, AUDRAIN (West of Hwy 19), BOONE, CALLAWAY, CHARITON, COLE, COOPER, HOWARD, KNOX,LINN, MACON, MILLER, MONITEAU,MONROE, OSAGE, PUTNAM, RANDOLPH, SCHUYLER, SHELBY AND SULLIVAN COUNTIES	$ 32.28	17.77
ATCHISON, ANDREW, BATES, CALDWELL, CARROLL,DAVIESS, DEKALB,GENTRY, GRUNDY, HARRISON, HENRY, HOLT, LIVINGSTON, MERCER, NODAWAY,ST. CLAIR, SALINE AND WORTH COUNTIES	$ 30.76	17.77
AUDRAIN (East of Hwy.19), RALLS, MARION, LEWIS, CLARK AND SCOTLAND COUNTIES	$ 32.29	17.77
BARRY, BARTON, CAMDEN, CEDAR, CHRISTIAN, DADE, DALLAS, DOUGLAS, GREENE, HICKORY,JASPER, LACLEDE, LAWRENCE, MCDONALD, NEWTON, OZARK, POLK, STONE, TANEY, VERNON, WEBSTER AND WRIGHT COUNTIES	$ 30.36	17.77
BENTON, MORGAN AND PETTIS	$ 30.81	17.77
BOLLINGER, BUTLER, CAPE GIRARDEAU, DUNKLIN, MISSISSIPPI, NEW MADRID, PEMISCOT, PERRY, STE. GENEVIEVE, SCOTT, STODDARD AND WAYNE COUNTIES	$ 32.14	17.77
BUCHANAN, CLINTON, JOHNSON		

AND LAFAYETTE COUNTIES	$ 31.49	17.77
CARTER, HOWELL, OREGON AND RIPLEY COUNTIES	$ 31.09	17.77
CRAWFORD, DENT, GASCONADE, IRON, MADISON, MARIES, MONTGOMERY, PHELPS, PULASKI, REYNOLDS, SHANNON AND TEXAS COUNTIES	$ 32.13	17.77
FRANKLIN COUNTY	$ 35.56	17.77
JEFFERSON AND ST. CHARLES COUNTIES	$ 38.02	17.77
LINCOLN COUNTY	$ 34.00	17.77
PIKE, ST. FRANCOIS AND WASHINGTON COUNTIES	$ 32.92	17.77
WARREN COUNTY	$ 34.44	17.77

--- ELEC0001-002 05/31/2020

BOLLINGER, BUTLER, CAPE GIRARDEAU, CARTER, DUNKLIN, FRANKLIN, IRON, JEFFERSON, LINCOLN, MADISON, MISSISSIPPI, NEW MADRID, PEMISCOT, PERRY,REYNOLDS, RIPLEY, ST. CHARLES, ST. FRANCOIS, ST. LOUIS (City and County), STE. GENEVIEVE, SCOTT, STODDARD, WARREN, WASHINGTON AND WAYNE COUNTIES

	Rates	Fringes
Electricians	$ 40.61	27.06

---

* ELEC0002-001 01/01/2021

ADAIR, AUDRAIN, BOONE, CALLAWAY, CAMDEN, CARTER, CHARITON, CLARK, COLE, COOPER, CRAWFORD, DENT, FRANKLIN, GASCONADE, HOWARD, HOWELL, IRON, JEFFERSON, KNOX, LEWIS, LINCON, LINN, MACON, MARIES, MARION, MILLER, MONITEAU, MONROE, MONTGOMERY, MORGAN, OREGON, OSAGE, PERRY, PHELPS, PIKE, PULASKI, PUTNAM, RALLS, RANDOLPH, REYNOLDS, RIPLEY, ST. CHARLES, ST. FRANCOIS, ST. LOUIS (City and County), STE. GENEVIEVE, SCHUYLER, SCOTLAND, SHANNON, SHELBY, SULLIVAN, TEXAS, WARREN AND WASHINGTON COUNTIES

	Rates	Fringes
Line Construction:		
Equipment Operator	$ 41.23	21.81
Groundman & Truck Driver	$ 31.50	18.26
Lineman & Cable Splicer	$ 48.03	24.31

--- ELEC0053-004 01/01/2020

	Rates	Fringes
Line Construction:		
(ANDREW, ATCHINSON, BARRY, BARTON,		

BUCHANAN, CALDWELL,
CEDAR, CHRISTIAN,
CLINTON, DADE,
DALLAS, DAVIES,,
DEKALB,
DOUGLAS, GENTRY, GREENE,
GRUNDY, HARRISON,
HICKORY, HOLT,
JASPER, LACLEDE,
LAWRENCE, LIVINGSTON,
MCDONALD, MERCER,
NEWTON, NODAWAY,
OZARK, POLK, ST.
CLAIR, STONE, TANEY,
VERNON, WEBSTER, WORTH
AND WRIGHT
COUNTIES)

Groundman Powderman	$ 32.27	16.09
Groundman	$ 30.12	15.38
Lineman Operator	$ 43.40	19.30
Lineman	$ 47.30	20.45

Line Construction; (BATES,
BENTON, CARROLL, CASS,
CLAY, HENRY, JACKSON,
JOHNSON,
LAFAYETTE, PETTIS,
PLATTE, RAY AND
SALINE COUNTIES)

Groundman Powderman	$ 32.27	15.52
Groundman	$ 30.12	14.88
Lineman Operator	$ 43.40	18.80
Lineman	$ 47.30	19.95

--- ELEC0095-001 06/01/2019

BARRY, BARTON, CEDAR, DADE, JASPER, LAWRENCE, MCDONALD,
NEWTON, ST CLAIR, AND VERNON COUNTIES

	Rates	Fringes
Electricians:		
Cable Splicers	$ 25.40	12.19
Electricians	$ 27.43	14.97

--- ELEC0124-007 08/26/2019

BATES, BENTON, CARROLL, CASS, CLAY, COOPER, HENRY,
JACKSON, JOHNSON, LAFAYETTE, MORGAN, PETTIS, PLATTE,
RAY AND SALINE COUNTIES:

	Rates	Fringes
Electricians	$ 40.79	22.92

--- ELEC0257-003 03/01/2020

AUDRAIN (Except Cuivre Township), BOONE, CALLAWAY, CAMDEN, CHARITON, COLE, CRAWFORD, DENT, GASCONADE, HOWARD, MARIES, MILLER, MONITEAU, OSAGE, PHELPS AND RANDOLPH COUNTIES

	Rates	Fringes
Electricians:		
Cable Splicers	$ 30.42	16.085
Electricians	$ 34.00	18.68

--- ELEC0350-002 12/01/2019

ADAIR, AUDRAIN (East of Highway 19), CLARK, KNOX, LEWIS, LINN, MACON, MARION, MONROE, MONTGOMERY, PIKE, PUTNAM, RALLS,
SCHUYLER, SCOTLAND, SHELBY AND SULLIVAN COUNTIES

	Rates	Fringes
Electricians	$ 32.50	17.65

--- ELEC0453-001 09/01/2020

	Rates	Fringes
Electricians:		
CHRISITAN, DALLAS, DOUGLAS, GREENE, HICKORY, HOWELL, LACLEDE, OREGON, OZARK, POLK, SHANNON, WEBSTER and WRIGHT COUNTIES	$ 28.10	15.81
PULASKI and TEXAS COUNTIES	$ 32.76	16.27
STONE and TANEY COUNTIES	$ 23.89	14.99

--- ELEC0545-003 06/01/2020

ANDREW, BUCHANAN, CLINTON, DEKALB, ATCHISON, HOLT, MERCER, GENTRY, HARRISON, DAVIESS, GRUNDY, WORTH, LIVINGSTON, NODAWAY, AND CALDWELL COUNTIES

	Rates	Fringes
Electricians:	$ 33.00	18.10

--- ELEC0702-004 12/30/2019

BOLLINGER, BUTLER, CAPE GIRARDEAU, DUNKLIN, MADISON, MISSISSIPPI, NEW MADRID, PEMISCOT, SCOTT, STODDARD AND WAYNE COUNTIES

	Rates	Fringes

Line Construction:

Groundman - Class A	$ 30.31	29% + 7.75
Groundman-Equipment Operator Class II (all other equipment)	$ 38.46	29% + 7.75
Heavy-Equipment Operator Class I (all crawler type equipment D-4 and larger)	$ 43.88	29% + 7.75
Lineman	$ 53.51	29% + 7.75

--- ENGI0101-001 05/01/2020

ANDREW, ATCHISON, BATES, BENTON, BUCHANAN, CALDWELL, CARROLL, CHARITON, CLINTON, COOPER, DAVIESS, DEKALB, GENTRY, GRUNDY,
HARRISON, HENRY, HOLT, HOWARD, JOHNSON, LAFAYETTE, LINN, LIVINGSTON, MERCER, NODAWAY, PETTIS, SALINE, SULLIVAN AND WORTH COUNITES

	Rates	Fringes
Power equipment operators:		
GROUP 1	$ 34.73	18.20
GROUP 2	$ 34.33	18.20
GROUP 3	$ 32.33	18.20

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Asphalt roller operator, finish; asphalt paver and spreader; asphalt plant operator; auto grader or trimmer or sub-grader; backhoe; blade operator (all types); boilers -
2; booster pump on dredge; bulldozer operator; boring machine (truck or crane mounted); clamshell operator;
concrete mixer paver; concrete plant operator; concrete pump operator; crane operator; derrick or derrick trucks; ditching machine; dragline operator; dredge engineman;
dredge operator; drill cat with compressor mounted (self-contained) or similar type self- propelled rotary drill (not air tract); drilling or boring machine
(rotary-self-propelled); finishing machine operator; greaser; high loader-fork lift-skid loader (all types); hoisting engineer (2 active drums); locomotive operator
(standard guage); mechanics and welders (field and plants); mucking machine operator; pile drive operator; pitman crane or boom truck (all types); push cat; quad track; scraper
operators (all types); shovel operator; sideboom cats; side discharge spreader; skimmer scoop operators; slip form
paver operator (CMI, Rex, Gomeco or equal); la tourneau rooter (all tiller types); tow boat operator; truck

crane; wood and log chippers (all types).

GROUP 2: A-frame truck operator; articulated dump truck; back filler operator; boilers (1); chip spreader; churn drill operator; compressor; concrete mixer operator, skip loader; concrete saws (self-propelled); conveyor operator; crusher operator; distributor operator; elevating grader operator; farm tractor (all attachments); fireman rig; float operator; form grade operator; hoisting engine (one drum); maintenance operator; multiple compactor; pavement breaker, self-propelled hydra-hammer (or similar type); paymill operator; power shield; pumps; roller operator (with or without blades); screening and washing plant; self-propelled street broom or sweeper; siphons and jets; straw blower; stump cutting machine; siphons and jets; tank car heater operator (combination boiler and booster); welding machine; vibrating machine operator (not hand held); welding machine.
GROUP 3: (a) Oiler;
(b) Oiiler driver
(c) Mechanic.

HOURLY PREMIUMS:
THE FOLLOWING CLASSIFICATIONS SHALL RECEIVE ($ .25) ABOVE
GROUP 1 RATE: Dragline operator - 3 yds. & over; shovel 3 yds. & over; clamshell 3 yds. & over; Crane, rigs or piledrivers, 100' of boom or over (incl. jib.), hoist - each additional active drum over 2 drums

THE FOLLOWING CLASSIFICATIONS SHALL RECEIVE ($ .50) ABOVE
GROUP 1 RATE: Tandem scoop operator; crane, rigs or piledrivers 150' to 200' of boom (incl. jib.)

THE FOLLOWING CLASSIFICATIONS SHALL RECEIVE ($ .75) ABOVE
GROUP 1 RATE: Crane rigs, or piledrivers 200 ft. of boom or over (including jib.)

--- ENGI0101-005 04/01/2020

CASS, CLAY, JACKSON,PLATTE AND RAY COUNTIES

	Rates	Fringes
Power equipment operators:		
GROUP 1	$ 37.02	19.89
GROUP 2	$ 35.98	19.89
GROUP 3	$ 31.51	19.89
GROUP 4	$ 34.86	19.89

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

operator; push cat operator; quad trac; scoop operator - all types; shovel operator; sideboom cats; skimmer scoop operators; trenching machine operator; truck crane.

GROUP 2: A-frame; asphalt hot-mix silo; asphalt plant fireman (drum or boiler); asphalt plant man; asphalt plant man; asphalt plant mixer operator; asphalt roller operator; backfiller operator; barber-greene loader; boat operator
(bridges and dams); chip spreader; concrete mixer operator - skip loader; concrete plant operator; concrete pump operator; crusher operator; dredge oiler; elevating grader operator; fork lift; greaser-fleet; hoisting engine - 1;
locomotive operator - narrow gauge; multiple compactor; pavement breaker; powerbroom - self-propelled; power
shield; rooter; side discharge concrete spreader; slip form finishing machine; stumpcutter machine; throttle man;
tractor operator (over 50 h.p.); winch truck.

GROUP 3: Boilers - 1; chip spreader (front man); churn drill operator; clef plane operator; concrete saw operator (self-
propelled); curb finishing machine; distributor operator; finishing machine operator; flex plane operator; float
operator; form grader operator; pugmill operator; roller operator, other than high type asphalt; screening & washing plant operator; siphons & jets; sub-grading machine
operator; spreader box operator, self-propelled (not asphalt); tank car heater operator (combination boiler & booster); tractor operator (50 h.p. or less); Ulmac, Ulric or similar spreader; vibrating machine operator, not hand;

GROUP 4: Grade checker; Oiler; Oiler-

Driver HOURLY PREMIUMS:

The following classifications shall receive $ .25 above GROUP 1 rate:
Clamshells - 3 yds. or over; Cranes - Rigs or Piledrivers, 100 ft. of boom or over (including jib);
Draglines - 3 yds. or over; Hoists - each additional active drum over 2 drums; Shovels - 3 yds. or over;

The following classifications shall receive $ .50 above GROUP 1 rate:
Tandem scoop operator; Cranes - Rigs or Piledrivers, 150 ft. to 200 ft. of boom (including jib); Tandem scoop.

The following classifications shall receive $ .75 above GROUP 1 rate:

Cranes - Rigs or Piledrivers, 200 ft. of boom or over (including jib.).

--- ENGI0513-004 05/06/2019

FRANKLIN, JEFFERSON, LINCOLN, ST CHARLES, AND WARREN COUNTIES

	Rates	Fringes
Power equipment operators:		
GROUP 1	$ 34.36	27.36
GROUP 2	$ 34.36	27.36
GROUP 3	$ 33.06	27.36
GROUP 4	$ 32.61	27.36

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Backhoe, Cable; Backhoe, Hydraulic (2 cu yds bucket and under regardless of attachment, one oiler for 2 or 3,
two oilers for 4 through 6); Backhoe, Hydraulic over 2 cu yds; Cableway; Crane, Crawler or Truck; Crane, Hydraulic - Truck or Cruiser mounted, 16 tons and over; Crane,
Locomotive; crane with boom including jib over 100 ft from pin to pin; Crane using rock socket tool; Derrick, Steam; Derrick Car and Derrick Boat; Dragline, 7 cu yds and over; Dredge; Gradall, Crawler or tire mounted; Locomotive, Gas,
Steam & other powers; Pile Driver, Land or Floating; Scoop, Skimmer; Shovel, Power (Electric, Gas, Steam or other powers); Shovel, Power (7 cu yds and over); Switch Boat; Whirley; Air Tugger with air compressor; Anchor Placing Barge; Asphalt Spreaker; Athey Force Feeder Loader,
self-propelled; Backfilling Machine; Boat Operator - Push Boat or Tow Boat (job site); Boiler, High Pressure Breaking in Period; Boom Truck, Placing or Erecting; Boring Machine, Footing Foundation; Bullfloat; Cherry Picker; Combination
Concrete Hoist and Mixer (such as Mixermobile); Compressor, Two 125 CFM and under; Compressor, Two through Four over
125 CFM; Compressor when operator runs throttle; Concrete Breaker (Truck or Tractor mounted); Concrete Pump (such as
Pumpcrete machine); Concrete Saw (self-propelled); Concrete Spreader; Conveyor, Large (not selfpropelled) hoisting or
moving brick and concrete into, or into and on floor level, one or both; Crane, Cimbing (such as Linden); Crane,
Hydraulic - Rough Terrain, self-propelled; Crane, Hydraulic - Truck or Cruiser mounted - under 16 tons; Drilling machine - Self-powered, used for earth or rock drilling

or boring (wagon drills and any hand drills obtaining power
from other souces including concrete breakers, jackhammers and Barco equipmnet no engineer required); Elevating
Grader; Engine Man, Dredge; Excavator or Powerbelt Machine; Finishing Machine, self- propelled oscillating screed;
Forklift; Generators, Two through Six 30 KW or over; Grader, Road with power blade; Greaser; Highlift; Hoist, Concrete and Brick (Brick cages or concrete skips operating or on tower, Towermobile, or similar equipment); Hoist,
Three or more drums in use; Hoist, Stack; Hydro-Hammer; Lad-A-Vator, hoisting brick or concrete; Loading Machine such as Barber-Greene; Mechanic on job site

GROUP 2: Air Tugger with plant air; Boiler (for power or heating shell of building or temporary enclosures in
connection with construction work); Boiler, Temporary; Compressor, One over 125 CFM; Compressor, truck mounted; Conveyor, Large (not self- propelled); Conveyor, Large (not self- propelled) moving brick and concrete (distributing)
on floor level; Curb Finishing Machine; Ditch Paving Machine; Elevator (outside); Endless Chain Hoist; Fireman (as required); Form Grader; Hoist, One Drum regardless of size (except brick or concrete); Lad-A-Vator, other
hoisting; Manlift; Mixer, Asphalt, over 8 cu ft capacity; Mixer, one bag capacity or less; Mixer, without side loader, two bag capacity or more; Mixer, with side loader, regardless of size, not Paver; Mud Jack (where mud jack is used in conjenction with an air compressor, operator shall be paid $ .55 per hour in addition to his basic hourly rate for covering both operations); Pug Mill operator; Pump,
Sump - self powered, automatic controlled over 2"";
Scissor Lift (used for hoisting); Skid Steer Loader; Sweeper,
Street; Tractor, small wheel type 50 HP and under withgrader blade and similar equipment; Welding Machine, One over 400 amp; Winch, operating from truck

GROUP 3: Boat operator - outboard motor, job site; Conveyors (such as Con-Vay-It) regardless of how used; Elevator
(inside); Heater operator, 2 through 6; Sweeper,

Floor GROUP 4: Crane type

HOURLY PREMIUMS:

Backhoe, Hydraulic 2 cu yds or less without oiler - $2.00; Crane,climbing (such as Linden) - $.50;
Crane, Pile Driving and Extracting -

$ .50 Crane with boom (including job)
over
100 ft from pin to pin - add $.01 per
foot to maximum of $4.00);
Crane, using rock socket tool - $ .50;
Derrick, diesel, gas or electric hoisting material
and erecting steel (150 ft or more above ground) - $
.50; Dragline, 7 cu yds and over - $ .50;
Hoist, Three or more drums in use - $
.50; Scoop, Tandem - $.50;
Shovel, Power - 7 cu yds and over - $
.50; Tractor, Tandem Crawler - $ .50;
Tunnel, man assigned to work in
tunnel or tunnel shaft - $ .50;
Wrecking, when machines are
working on second floor or higher
- $ .50

--- ENGI0513-006 05/01/2019

ADAIR, AUDRAIN, BOLLINGER, BOONE, BUTLER, CALLAWAY,
CAPE GIRARDEAU, CARTER, CLARK, COLE, CRAWFORD,
DENT, DUNKLIN,
GASCONADE, HOWELL, IRON, KNOX, LEWIS, MACON, MADISON,
MARIES, MARION, MILLER, MISSISSIPPI, MONITEAU, MONROE,
MONTGOMERY,
MORGAN, NEW MADRID, OREGON, OSAGE, PEMISCOT, PERRY, PHELPS,
PIKE, PULASKI, PUTNAM, RALLS, RANDOLPH, REYNOLDS, RIPLEY,
ST. FRANCOIS, STE. GENEVIEVE, SCHUYLER, SCOTLAND, SCOTT,
SHANNON, SHELBY, STODDARD, TEXAS, WASHINGTON, AND WAYNE
COUNTIES

	Rates	Fringes
Power equipment operators:		
GROUP 1	$ 29.69	27.16
GROUP 2	$ 29.34	27.16
GROUP 3	$ 29.14	27.16
GROUP 4	$ 25.49	27.16

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Asphalt finishing machine & trench
widening spreader, asphalt plant console operator;
autograder;
automatic slipform paver; back hoe; blade operator - all
types; boat operator tow; boiler two; central mix
concrete plant operator; clam shell operator; concrete
mixer paver; crane operator; derrick or derrick trucks;
ditching
machine; dozer operator; dragline operator; dredge
booster pump; dredge engineman; dredge operator; drill
cat with
compressor mounted on cat; drilling or boring machine
rotary self-propelled; highloader; hoisting engine 2

active drums; launchhammer wheel; locomotive operator standard
guage; mechanics and welders; mucking machine; piledriver operator; pitman crane operator; push cat operator; guad-trac; scoop operator; sideboom cats; skimmer scoop operator; trenching machine operator; truck crane, shovel operator.

GROUP 2: A-Frame; asphalt hot-mix silo; asphalt roller operator asphalt plant fireman (drum or boiler); asphalt plant man; asphalt plant mixer operator; backfiller
operator; barber-greene loader; boat operator (bridge & dams); chip spreader; concrete mixer operator skip loader; concrete plant operator; concrete pump operator; dredge
oiler; elevating graded operator; fork lift; grease fleet; hoisting engine one; locomotive operator narrow guage;
multiple compactor; pavement breaker; powerbroom self-propelled; power shield; rooter; slip-form finishing machine; stumpcutter machine; side discharge concrete
spreader; throttleman; tractor operator (over 50 hp); winch truck; asphalt roller operator; crusher operator.

GROUP 3: Spreader box operator, self-propelled not asphalt; tractor operator (50 h.p. or less); boilers one; chip
spreader (front man); churn drill operator; compressor over 105 CFM 2-3 pumps 4"" & over; 2-3 light plant 7.5 KWA or any combination thereof; clef plane operator; compressor maintenance operator 2 or 3; concrete saw operator (self-propelled); curb finishing mancine; distributor operator; finishing machine operator; flex plane operator; float operator; form grader operator; pugmill operator;
riller operator other than high type asphalt; screening & washing plant operator; siphons & jets; subgrading machine operator; tank car heater (combination boiler & booster); ulmac, ulric or similar spreader; vibrating machine
operator; hydrobroom.

GROUP 4: Oiler; grout machine; oiler driver; compressor over 105 CFM one; conveyor operator one; maintenance operator; pump 4"" & over one.

FOOTNOTE: HOURLY PREMIUMS

Backhoe hydraulic, 2 cu. yds. or under Without oiler - $2.00 Certified Crane Operator - $1.50;
Certified Hazardous Material Operator
$1.50; Crane, climbing (such as
Linden) - $0.50;
Crane, pile driving and extracting - $0.50;
Crane, with boom (including jib) over 100' from pin to

pin add $0.01 per foot to maximum of $4.00;
Crane, using rock socket tool - $0.50;
Derrick, diesel, gas or electric, hoisting material
and erecting steel (150' or more above the ground) -
$0.50;
Dragline, 7 cu. yds, and over - $0.50;
Hoist, three or more drums in use - $0.50; Scoop, Tandem -
$0.50;
Shovel, power - 7 cu. yds. or more -
$0.50; Tractor, tandem crawler - $0.50;
Tunnel, man assigned to work in tunnel or tunnel shaft -
$0.50;
Wrecking, when machine is working on second floor or higher -
$0.50;

--- ENGI0513-007 05/06/2019

ST. LOUIS CITY AND COUNTY

	Rates	Fringes
Power equipment operators:		
GROUP 1	$ 34.36	27.36
GROUP 2	$ 34.36	27.36
GROUP 3	$ 33.06	27.36
GROUP 4	$ 32.61	27.36

POWER EQUIPMENT OPERATORS CLASSIFICATIONS

GROUP 1: Backhoe, cable or hydraulic; cableway; crane crawler or truck; crane, hydraulic-truck or cruiser mounted 16 tons & over; crane locomotive; derrick, steam; derrick car & derrick boat; dragline; dredge; gradall, crawler or tire mounted; locomotive, gas, steam & other powers; pile driver, land or floating; scoop, skimmer; shovel, power
(steam, gas, electric or other powers); switch
boat; whirley.

GROUP 2: Air tugger w/air compressor; anchor-placing barge; asphalt spreader; athey force feeder loader (self-
propelled); backfilling machine; backhoe-loader; boat operator-push boat or tow boat (job site); boiler, high pressure breaking in period; boom truck, placing or
erecting; boring machine, footing foundation; bull-float; cherry picker; combination concrete hoist & mixer (such as mixer mobile); compressor (when operator runs throttle);
concrete breaker (truck or tractor mounted); concrete pump, such as pump-crete machine; concrete saw (self-propelled), concrete spreader; conveyor, large (not self-propelled),
hoisting or moving brick and concrete into, or into and on floor level, one or both; crane, hydraulic-rough terrain, self-propelled; crane hydraulic-truck or

cruiser
mounted-under 16 tons; drilling machines, self-powered
use for earth or rock drilling or boring (wagon drills
nd any hand drills obtaining power from other sources
including
concrete breakers, jackhammers and barco equipment-no
engineer required); elevating grader; engineman,
dredge; excavator or powerbelt machine; finishing
machine,
self-propelled oscillating screed; forklift; grader,
road with power blade; highlift. greaser; hoist,
stack,
hydro-hammer; loading machine (such as barber-greene);
machanic, on job site; mixer, pipe wrapping machines;
plant asphalt; plant, concrete producing or ready-mix
job site;
plant heating-job site; plant mixing-job site; plant
power, generating-job site; pumps, two through six self-
powered
over 2""; pumps, electric submersible, two through six,
over 4""; quad-track; roller, asphalt, top or sub-grade;
scoop,
tractor drawn; spreader box; sub-grader; tie tamper;
tractor-crawler, or wheel type with or without power
unit, power take-offs and attachments regardless of
size;
trenching machine; tunnel boring machine; vibrating
machine automatic, automatic propelled; welding machines
(gasoline or diesel) two through six; well drilling
machine

GROUP 3: Conveyor, large (not self-propelled);
conveyor, large (not self-propelled) moving brick and
concrete
distributing) on floor level; mixer two or more mixers
of one bag capacity or less; air tugger w/plant air;
boiler, for power or heating on construction projects;
boiler,
temporary; compressor (mounted on truck; curb
finishing machine; ditch paving machine; elevator;
endless chain hoist; form grader; hoist, one drum
regardless of size; lad-a-vator; manlift; mixer,
asphalt, over 8 cu. ft.
capacity, without side loader, 2 bag capacity or more;

mixer, with side loader, regardless of size; pug mill
operator; pump, sump-self-powered, automatic controlled
over 2"" during use in connection with construction
work; sweeper, street; welding machine, one over 400
amp.; winch operating from truck; scissor lift (used
for hoisting);
tractor, small wheel type 50 h.p. & under with grader
blade & similar equipment; Oiler on dredge and on truck
crane.

GROUP 4: Boat operator-outboard motor (job site);
conveyor (such as con-vay-it) regardless of how used;
sweeper, floor

HOURLY PREMIUMS:
Backhoe, hydraulic
 2 cu. yds. or under without oiler $2.00
 Certified Crane Operator 1.50
  Certified Hazardous Material Operator 1.50
 Crane, climbing (such as Linden) .50
 Crane, pile driving and extracting .50
  Crane, with boom (including jib) over
 100' (from pin to pin) add $.01
 per foot to maximum of 4.00
 Crane, using rock socket tool .50
Derrick, diesel, gas or
electric, hoisting material and
erecting steel
(150' or more above ground) .50 Dragline, 7 cu. yds. and
over .50
Hoist, three (3) or more drums in use .50
Scoop, Tandem .50
Shovel, power - 7 cu. yds. or more .50
Tractor, tandem crawler .50 Tunnel, man assigned to work in
tunnel
or tunnel shaft .50
Wrecking, when machine is working on
second floor or higher .50

--- IRON0010-012 04/01/2020

	Rates	Fringes
Ironworkers:		
ANDREW, BARTON, BENTON, CAMDEN, CEDAR, CHA RITON, CHRISTIAN, COOPER, DADE, DALLAS, DAVIESS, DE KALB, GENTRY, GREENE, GRUNDY, HARRISON, HICKORY, HOLT, HOWARD, LACLEDE, LINN, LIVINGSTON, MERCER, MONITEAU, MORGAN, NODAWAY, POLK, PUTNAM, RANDLOPH, ST. CLAIR, SULLIVAN, TANEY, VERNON, WEBSTER, WRIGHT and WORTH Counties and portions of ADAIR, BOONE, MACON, MILLER and RANDOLPH Counties.....	$ 31.00	31.24
ANDREW, BARTON, BENTON, CAMDEN, CEDAR, CHA RITON, CHRISTIAN, COOPER, DADE, DALLAS, DAVIESS, DE KALB, GENTRY, GREENE, GRUNDY,		

HARRISON, HICKORY, HOLT,
HOWARD, LACLEDE, LINN,
LIVINGSTON, MERCER,

MONITEAU, MORGAN, NODAWAY,
PETTIS, POLK, PUTNAM,
RANDLOPH, ST. CLAIR,
SULLIVAN, TANEY, VERNON,
WEBSTER, WRIGHT and WORTH
Counties and portions of
ADAIR, BOONE, MACON,
MILLER and RANDOLPH
Counties.....$ 30.55 30.44
ATCHISON, BATES, BUCHANAN,
CALDWELL, CARROLL, CASS,
CLAY, CLINTON, HENRY,
JACKSON, JOHNSON,
LAFAYETTE, PETTIS, PLATTE,
SALINE, AND RAY COUNTIES....$ 34.00 31.24

--- IRON0321-002 08/01/2020

DOUGLAS, HOWELL and OZARK COUNTIES

	Rates	Fringes
Ironworker	$ 22.00	19.26

--- IRON0396-004 08/05/2020

ST. LOUIS (City and County), ST. CHARLES, JEFFERSON,
IRON, FRANKLIN, LINCOLN, WARREN, WASHINGTON, ST.
FRANCOIS, STE.
GENEVIEVE, and REYNOLDS Counties; and portions of
MADISON, PERRY, BOLLINGER, WAYNE, and CARTER Counties

	Rates	Fringes
Ironworker	$ 35.86	28.11

--- IRON0396-009 08/05/2020

AUDRAIN, CALLAWAY, COLE, CRAWFORD, DENT, GASCONADE,
MARIES, MONTGOMERY, OSAGE, PHELPS, PIKE, PULASKI,
TEXAS and WRIGHT
Counties; and portions of BOONE, CAMDEN, DOUGLAS, HOWELL,
LACLEDE, MILLER, MONROE, OREGON, SHANNON and RALLS Counties

	Rates	Fringes
Ironworker	$ 31.39	29.20

--- IRON0577-005 08/01/2020

ADAIR, CLARK, KNOX, LEWIS, MACON, MARION, MONROE,
RALLS, SCHUYLER, SCOTLAND, AND SHELBY COUNTIES

	Rates	Fringes
Ironworker	$ 27.65	24.20

--- IRON0584-004 06/01/2019

BARRY, JASPER, LAWRENCE, MCDONALD, NEWTON AND STONE Counties

	Rates	Fringes
Ironworkers:	$ 26.00	15.35

--- IRON0782-003 08/01/2020

CAPE GIRARDEAU, MISSISSIPPI, NEW MADRID, SCOTT, & STODDARD Counties; and portions of BOLLINGER, BUTLER, CARTER, DUNKLIN, MADISON, PEMISCOT, PERRY, RIPLEY, and WAYNE Counties

	Rates	Fringes
Ironworkers:		
Locks, Dams, Bridges and other major work on the Mississippi and Ohio River only	$ 31.63	24.27
All Other Work	$ 28.29	23.77

--- LABO0042-003 03/04/2020

ST. LOUIS (City and County)

	Rates	Fringes
LABORER		
Plumber Laborer	$ 34.07	16.07

--- LABO0042-005 03/04/2020

ST. LOUIS (City and County)

	Rates	Fringes
LABORER		
Dynamiter, Powderman	$ 34.07	16.07
Laborers, Flaggers	$ 34.07	16.07
Wrecking	$ 34.07	16.07

--- LABO0424-002 05/01/2020

	Rates	Fringes
LABORER		
ADAIR, AUDRAIN, BOONE,		

CALLAWAY, CHARITON, CLARK, COLE, COOPER, HOWARD, IRON, KNOX, LEWIS, LINN, MACON, MADISON, MARION, MILLER, MONITEAU, MONROE, PERRY, PIKE, PUTNAM, RALLS, RANDOLPH, REYNOLDS, ST. FRANCOIS, STE. GENEVIEVE, SCHUYLER, SCOTLAND, SHELBY AND SULLIVAN COUNTIES		
GROUP 1	$ 30.75	14.57
GROUP 2	$ 30.75	14.57
BOLLINGER, BUTLER, CAPE GIRARDEAU, CARTER, CRAWFORD, DENT, DUNKLIN, GASCONADE, HOWELL, MARIES, MISSISSIPPI, NEW MADRID, OREGON, OSAGE, PEMISCOT, PHELPS, PULASKI, RIPLEY, SCOTT, SHANNON, STODDARD, TEXAS, WASHINGTON AND WAYNE COUNTIES		
GROUP 1	$ 30.75	14.57
GROUP 2	$ 30.75	14.57
FRANKLIN COUNTY		
GROUP 1	$ 32.86	14.57
GROUP 2	$ 33.46	14.57
JEFFERSON COUNTY		
GROUP 1	$ 32.91	14.57
GROUP 2	$ 33.51	14.57
LINCOLN, MONTGOMERY AND WARREN COUNTIES		
GROUP 1	$ 34.33	14.57
GROUP 2	$ 34.33	14.57
ST.CHARLES COUNTY		
GROUP 1	$ 34.33	14.57
GROUP 2	$ 34.33	14.57

LABORERS
CLASSIFICATIONS

GROUP 1 - General laborer-flagman, carpenter tenders; salamander Tenders; Dump Man; Ticket Takers; loading trucks under bins, hoppers, and conveyors; track man; cement handler; dump man on earth fill; georgie buggie man; material batch hopper man; spreader on asphalt machine; material mixer man (except on manholes); coffer dams; riprap pavers rock, block or brick; scaffolds over ten feet not self-supported from ground up; skip man on concrete paving; wire mesh setters on concrete paving; all work in connection with sewer, water, gas, gasoling, oil, drainage pipe, conduit pipe, tile and duct lines and all other pipe lines; power tool operator; all work in

connection with
hydraulic or general dredging operations; form setters, puddlers (paving only); straw blower nozzleman; asphalt plant platform man; chuck tender; crusher feeder; men
handling creosote ties or creosote materials; men working with and handling epoxy material; topper of standing trees; feeder man on wood pulverizers, board and willow mat
weavers and cabelee tiers on river work; deck hands; pile dike and revetment work; all laborers working on underground tunnels less than 25 ft. where compressed air is not used; abutement and pier hole men working six (6) ft. or more below ground; men working in coffer dams for bridge piers and footing in the river; barco tamper;
jackson or any other similar tamp; cutting torch man; liners, curb, gutters, ditch lines; hot mastic kettlemen; hot tar applicator; hand blade operator; mortar men or
brick or block manholes; rubbing concrete, air tool operator under 65 lbs.; caulker and lead man; chain or concrete saw under 15 h.p.; signal Gan; Guard rail and sign erectors.

GROUP 2 - Skilled laborers - Vibrator man; asphalt raker; head pipe layer on sewer work; batterboard man on pipe and ditch work; cliff scalers working from bosun's chairs;
scaffolds or platforms on dams or power plants over 10 ft. high; air tool operator over 65 lbs.; stringline man on
concrete paving; sandblast man; laser beam man; wagon drill; churn drill; air track drill and all other similar type drills, gunite nozzle man; pressure grout man; screed man on asphalt; concrete saw 15 h.p. and over; grade
checker; strigline man on electronic grade control; manhole builder; dynamite man; powder man; welder; tunnel man;
waterblaster - 1000 psi or over; asbestos and/or hazardous waste removal and/or disposal

---

--- LABO0579-005 05/01/2020

	Rates	Fringes
LABORER (ANDREW, ATCHISON, BUCHANAN, CALDWELL, CLINTON, DAVIESS, DEKALB, GENTRY, GRUNDY, HARRISON, HOLT, LIVINGSTON, MERCER, NODAWAY and WORTH COUNTIES.)		
GROUP 1	$ 27.21	15.42
GROUP 2	$ 27.56	15.42

LABORER (BARRY,
BARTON, BATES,
BENTON, CAMDEN,
CARROLL, CEDAR,
CHRISTIAN, DADE,
DALLAS, DOUGLAS,
GREENE, HENRY. HICKORY,
JASPER, JOHNSON, LACLEDE,
LAWRENCE, MCDONALD,
MORGAN, NEWTON, OZARK,
PETTIS, POLK, ST.CLAIR,
SALINE, STONE,
TANEY, VERNON,
WEBSTER and WRIGHT
COUNTIES)

GROUP 1	$ 26.21	14.62
GROUP 2	$ 26.76	14.62
LABORER (LAFAYETTE COUNTY)		
GROUP 1	$ 27.76	14.87
GROUP 2	$ 28.11	14.87

LABORERS CLASSIFICATIONS

GROUP 1: General Laborers - Carpenter tenders; salamander tenders; loading trucks under bins; hoppers & conveyors;
track men & all other general laborers; air tool operator; cement handler-bulk or sack; dump man on earth fill;
georgie buggie man; material batch hopper man; material mixer man (except on manholes); coffer dams; riprap pavers - rock, block or brick; signal man; scaffolds over ten feet not self-supported from ground up; skipman on concrete
paving; wire mesh setters on concrete paving; all work in connection with sewer, water, gas, gasoline, oil drainage pipe, conduit pipe, tile and duct lines and all other pipe lines; power tool operator, all work in connection with
hydraulic or general dredging operations; puddlers (paving only); straw blower nozzleman; asphalt plant platform man; chuck tender; crusher feeder; men handling creosote ties or creosote materials; men working with and handling epoxy
material or materials (where special protection is required); rubbing concrete; topper of standing trees; batter board man on pipe and ditch work; feeder man on wood pulverizers; board and willow mat weavers and cable tiers
on river work; deck hands; pile dike and revetment work; all laborers working on underground tunnels less than 25 feet where compressed air is not used; abutment and pier hole men working six (6) feet or more below ground; men
working in coffer dams for bridge piers and footings in the river; ditchliners; pressure groutmen; caulker; chain or

concrete saw; cliffscalers working from scaffolds, bosuns' chairs or platforms on dams or power plants over (10) feet above ground; mortarmen on brick or block manholes; toxic and hazardous waste work.

GROUP 2: Skilled Laborers - Head pipe layer on sewer work; laser beam man; Jackson or any other similar tamp; cutting

torch man; form setters; liners and stringline men on concrete paving, curb, gutters; hot mastic kettleman; hot tar applicator; sandblasting and gunite nozzlemen; air tool operator in tunnels; screed man on asphalt machine; asphalt raker; barco tamper; churn drills; air track drills and all similar drills; vibrator man; stringline man for electronic grade control; manhole builders-brick or block; dynamite
and powder men; grade checker.

--- LAB00663-002 04/01/2020

CASS, CLAY, JACKSON, PLATTE AND RAY COUNTIES

	Rates	Fringes
LABORER		
GROUP 1	$ 31.28	16.33
GROUP 2	$ 32.49	16.33

LABORERS CLASSIFICATIONS

GROUP 1: General laborers, Carpenter tenders, salamander tenders, loading trucks under bins, hoppers and conveyors, track men and all other general laborers, air tool
operator, cement handler (bulk or sack), chain or concrete saw, deck hands, dump man on earth fill, Georgie Buggies
man, material batch hopper man, scale man, material mixer man (except on manholes), coffer dams, abutments and pier
hole men working below ground, riprap pavers rock, black or brick, signal man, scaffolds over ten feet not self-supported from ground up, skipman on concrete paving, wire mesh setters on concrete paving, all work in
connection with sewer,water, gas, gasoling, oil, drainage pipe, conduit pipe, tile and duct lines and all other
pipelines, power tool operator, all work in connection with hydraulic or general dredging operations, straw blower
nozzleman,asphalt plant platform man, chuck tender, crusher feeder, men handling creosote ties on creosote materials,
men working with and handling epoxy material or materials (where special protection is required),

topper of standing trees, batter board man on pipe and ditch work, feeder man
on wood pulverizers, board and willow mat weavers and cable tiers on river work, deck hands, pile dike and revetment
work, all laborers working on underground tunnels less than 25 feet where compressed air is not used, abutment and pier hole men working six (6) feet or more below ground, men
working in coffer dams for bridge piers and footings in the river, ditchliners, pressure groutmen, caulker and chain or concrete saw, cliffscalers working from scaffolds, bosuns' chairs or platforms on dams or power plants over (10) feet above ground, mortarmen on brick or block manholes, signal man.

GROUP 2: Skilled Laborer - spreader or screed man on asphalt machine, asphalt raker, grade checker, vibrator
man, concrete saw over 5 hp., laser beam man, barco tamper, jackson or any other similar tamp, wagon driller, churn
drills, air track drills and other similar drills, cutting torch man, form setters, liners and stringline men on
concrete paving, curb, gutters and etc., hot mastic kettleman, hot tar applicator, hand blade operators, mortar men on brick or block manholes, sand blasting and gunnite
nozzle men, rubbing concrete, air tool operator in tunnels, head pipe layer on sewer work, manhole builder (brick or

block), dynamite and powder men.

--- PAIN0002-002 09/01/2007

CLARK, FRANKLIN, JEFFERSON, LEWIS, LINCOLN, MARION, PIKE, RALLS, ST. CHARLES, ST. LOUIS (CITY & COUNTY), AND WARREN COUNTIES

	Rates	Fringes
Painters:		
Brush and Roller; Taper	$ 28.61	10.24
High work over 60 feet	$ 29.11	10.24
Lead Abatement	$ 29.36	10.24
Pressure Roller; High work under 60 ft	$ 28.86	10.24
Spray & Abrasive Blasting; Water Blasting (Over 5000 PSI)	$ 30.61	10.24
Taper (Ames Tools & Bazooka)	$ 30.21	10.24

--- PAIN0002-006 04/01/2020

ADAIR, AUDRAIN, BOONE, CALLAWAY, CHARITON, COLE, GASCONADE, HOWARD, KNOX, LINN, MACON, MONROE, MONTGOMERY, OSAGE, PUTNAM, RANDOLPH, SCHUYLER, SCOTLAND, SHELBY AND SULLIVAN COUNTIES and
the City of Booneville.

	Rates	Fringes
Painters:		
Bridges, Dams, Locks or Powerhouses	$ 26.64	13.98
Brush and Roll; Taping, Paperhanging	$ 24.64	13.98
Epoxy or Any Two Part Coating; Sandblasting; Stage or other Aerial Work - Platforms over 50 feet high; Lead Abatement	$ 25.64	13.98
Spray; Structural Steel (over 50 feet)	$ 24.64	13.98
Tapers using Ames or Comparable Tools	$ 25.39	13.98

--- PAIN0003-004 04/01/2019

CASS, CLAY, CLINTON, JACKSON, JOHNSON, LAFAYETTE, PLATTE & RAY COUNTIES

	Rates	Fringes
Painters:		
Bridgeman; Lead Abatement; Sandblast; Storage Bin & Tanks	$ 33.41	17.76
Brush & Roller	$ 30.54	17.76
Drywall	$ 31.74	17.76
Paper Hanger	$ 31.04	17.76
Stageman; Beltman; Steelman; Elevator Shaft; Bazooka, Boxes and Power Sander; Sprayman; Dipping	$ 32.41	17.76
Steeplejack	$ 36.98	17.76

--- PAIN0003-011 04/01/2019

BATES, BENTON, CALDWELL, CARROLL, COOPER, DAVIESS, GRUNDY, HARRISON, HENRY, LIVINGSTON, MERCER, MONITEAU, MORGAN, PETTIS & SALINE COUNTIES

	Rates	Fringes
Painters:		

Bridgeman; Lead Abatement; Sandblast; Storage Bin & Tanks	$ 26.73	17.76
Brush & Roller	$ 24.43	17.76
Drywall	$ 25.39	17.76
Paper Hanger	$ 24.83	17.76
Stageman; Beltman; Steelman; Elevator Shaft; Bazooka, Boxes and Power Sander; Sprayman; Dipping	$ 26.35	17.76
Steeplejack	$ 29.58	17.76

--- PAIN0203-001 04/01/2012

BARRY, BARTON, CEDAR, CHRISTIAN, DADE, DALLAS, DOUGLAS, GREENE, HICKORY, HOWELL, JASPER, LAWRENCE, MCDONALD, NEWTON, OZARK, POLK, ST. CLAIR, STONE, TANEY, VERNON, WEBSTER, and WRIGHT COUNTIES

	Rates	Fringes
Painters:		
Finisher	$ 20.18	11.33
Painter	$ 19.75	11.76
Sandblaster, High Man, Spray Man, Vinyl Hanger, Tool Operator	$ 21.18	11.33

--- PAIN1265-003 07/01/2013

CAMDEN, CRAWFORD, DENT, LACLEDE, MARIES, MILLER, PHELPS, PULASKI AND TEXAS COUNTIES

	Rates	Fringes
Painters:		
Brush and Roller	$ 25.64	13.27
Floor Work	$ 26.14	13.27
Lead Abatement	$ 27.89	13.27
Spray	$ 27.14	13.27
Structural Steel, Sandblasting and All Tank Work	$ 26.89	13.27
Taping, Paperhanging	$ 26.64	13.27

--- PAIN1292-002 09/01/2016

BOLLINGER, BUTLER, CAPE GIRARDEAU, CARTER, DUNKLIN, MISSISSIPPI, NEW MADRID, OREGON, PEMISCOT, PERRY, REYNOLDS, RIPLEY, SCOTT, SHANNON, STODDARD and WAYNE COUNTIES

	Rates	Fringes

Painters:
Bridges, Stacks & Tanks.....$ 30.85 11.64
Brush & Roller.....$ 25.35 11.64
Spray & Abrasive Blasting;
Waterblasting (over 5000
PSI).....$ 28.95 11.64

Height Rates (All Areas):
Over 60 ft. $0.50 per
hour. Under 60 ft.
$0.25 per hour.

--- PAIN1292-003 09/01/2017

IRON, MADISON, ST. FRANCOIS, STE. GENEVIEVE and
WASHINGTON COUNTIES

	Rates	Fringes
Painters:		
Bridges, Stacks & Tanks	$ 31.05	12.74
Brush & Roller	$ 25.70	12.74
Spray & Abrasive Blasting; Waterblasting (Over 5000 PSI)	$ 28.70	12.74

Height Rates (All
Areas): 0ver 60 ft.
$0.50 per hour
Under 60 ft. $0.25 per hour.

--- PAIN2012-001 04/01/2020

ANDREW, ATCHISON, BUCHANAN, DE KALB, GENTRY, HOLT,
NODAWAY & WORTH COUNTIES

	Rates	Fringes
Painters:		
Brush & Roller	$ 32.91	17.86
Sandblaster	$ 34.41	17.86
Steeplejack	$ 37.98	17.86

--- PLAS0518-006 03/01/2020

BARRY, BARTON, CEDAR, CHRISTIAN, DADE, DALLAS, DOUGLAS,
GREENE, HICKORY, JASPER, LACLEDE, LAWRENCE, MCDONALD,
NEWTON, OZARK,
POLK, ST. CLAIR, STONE, TANEY, VERNON, WEBSTER, AND
WRIGHT COUNTIES

	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER	$ 24.44	12.11

--- PLAS0518-007 04/01/2020

CASS (Richards-Gebaur AFB only), CLAY, JACKSON, PLATTE AND RAY COUNTIES

	Rates	Fringes
Cement Masons:	$ 32.72	18.30

--- PLAS0518-011 04/01/2019

ANDREW, ATCHISON, BATES, BUCHANNAN, CLINTON, DEKALB, GENTRY, HENRY, HOLT, JOHNSON, LAFAYETTE, NODAWAY & WORTH COUNTIES

	Rates	Fringes
CEMENT MASON/CONCRETE FINISHER	$ 32.00	20.13

--- PLAS0527-001 04/01/2018

	Rates	Fringes
CEMENT MASON		
FRANKLIN, LINCOLN AND		
WARREN COUNTIES	$ 30.74	18.07
JEFFERSON, ST. CHARLES		
COUNTIES AND ST.LOUIS		
(City and County)	$ 32.66	18.62

--- PLAS0527-004 06/01/2017

CRAWFORD, DENT, IRON, MADISON, MARION, PHELPS, PIKE, PULASKI, RALLS, REYNOLDS, ST. FRANCOIS, STE. GENEVIEVE, SHANNON, TEXAS, WASHINGTON COUNTIES

	Rates	Fringes
CEMENT MASON	$ 28.10	18.07

--- PLAS0908-001 05/01/2017

BOLLINGER, BUTLER, CAPE GIRARDEAU, CARTER, DUNKLIN, HOWELL, MISSISSIPPI, NEW MADRID, OREGON, PEMISCOT, PERRY, RIPLEY, SCOTT, STODDARD, AND WAYNE COUNTIES

	Rates	Fringes
CEMENT MASON	$ 27.60	15.73

--- PLAS0908-005 05/01/2017

BENTON, CALDWELL, CALLAWAY, CAMDEN, CARROLL, COLE, DAVIESS, GASCONADE, GRUNDY, HARRISON, LIVINGSTON, MACON, MARIES, MERCER, MILLER, MONTGOMERY, MORGAN, OSAGE, PETTIS & SALINE COUNTIES

	Rates	Fringes
CEMENT MASON	$ 27.60	15.73

--- PLUM0008-003 06/01/2020

CASS, CLAY, JACKSON, JOHNSON, AND PLATTE COUNTIES

	Rates	Fringes
Plumbers	$ 48.03	22.84

--- PLUM0008-017 06/01/2020

BATES, BENTON, CARROLL, HENRY, LAFAYETTE, MORGAN, PETTIS, RAY, ST. CLAIR, SALINE AND VERNON COUNTIES

	Rates	Fringes
Plumbers	$ 48.03	22.84

--- PLUM0045-003 08/01/2020

ANDREW, ATCHISON, BUCHANAN, CALDWELL, CLINTON, DAVIESS, DEKALB, GENTRY, HARRISON, HOLT, NODAWAY AND WORTH COUNTIES

	Rates	Fringes
Plumbers and Pipefitters	$ 38.75	24.15

--- PLUM0178-003 11/01/2020

BARRY, CEDAR, CHRISTIAN, DADE, DALLAS, DOUGLAS, GREENE, HICKORY, LACLEDE, LAWRENCE, POLK, STONE, TANEY, WEBSTER AND WRIGHT COUNTIES

	Rates	Fringes
Plumbers and Pipefitters	$ 32.60	15.12

--- PLUM0178-006 11/01/2020

BARTON, JASPER, MCDONALD AND NEWTON COUNTIES

	Rates	Fringes

Plumbers and Pipefitters
Projects $750,000 & under...$ 29.63 15.22
Projects over $750,000.....$ 32.60 15.12

--- PLUM0533-004 06/01/2020

BATES, BENTON, CARROLL, CASS, CLAY, HENRY, HICKORY, JACKSON, JOHNSON, LAFAYETTE, MORGAN, PETTIS, PLATTE, RAY, SALINE, ST. CLAIR AND VERNON COUNTIES

	Rates	Fringes
Pipefitters	$ 48.53	22.55

--- PLUM0562-004 07/01/2020

ADAIR, AUDRAIN, BOLLINGER, BOONE, BUTLER, CALLAWAY,CAMDEN, CAPE GIRARDEAU,CARTER, CHARITON, CLARK, COLE, COOPER, CRAWFORD,
DENT, DUNKLIN, FRANKLIN, GASCONADE, GRUNDY, HOWARD, HOWELL, IRON, JEFFERSON, KNOX, LEWIS, LINCOLN, LINN, LIVINGSTON, MACON, MADISON, MARIES, MARION, MERCER, MILLER, MISSISSIPPI, MONITEAU, MONROE, MONTGOMERY, NEW MADRID, OREGON, OSAGE, PEMISCOTT,

PERRY, PHELPS, PIKE, PULASKI, PUTNAM, RALLS, RANDOLPH, REYNOLDS, RIPLEY, ST. CHARLES, ST.FRANCOIS, STE. GENEVIEVE, ST. LOUIS, SCHUYLER, SCOTLAND, SCOTT, SHANNON, SHELBY, STODDARD,
SULLIVAN, TEXAS, WARREN, WASHINGTON,AND WAYNE COUNTIES.

	Rates	Fringes
Plumbers and Pipefitters Mechanical Contracts including all piping and temperature control work $7.0 million & under	$ 41.66	21.49
Mechanical Contracts including all piping and temperature control work over $7.0 million	$ 43.60	27.85

--- PLUM0562-016 07/01/2020

CAMDEN, COLE, CRAWFORD, FRANKLIN, JEFFERSON, MARIES, MILLER, MONITEAU, OSAGE, PHELPS, PULASKI, ST. CHARLES, ST. LOUIS (City and County), WARREN and WASHINGTON COUNTIES

	Rates	Fringes
Plumbers Mechanical Contracts		

including all piping and
temperature control work
$7.0 million & under.....$ 40.41 21.49
Mechanical Contracts
including all piping and
temperature control work
over $7.0 million.....$ 43.60 27.85

--- TEAM0013-001 05/01/2019

	Rates	Fringes
Truck drivers (ADAIR, BUTLER, CLARK, DUNKIN, HOWELL, KNOX, LEWIS, OREGON, PUTNAM, RIPLEY, SCHUYLER AND SCOTLAND COUNTIES)		
GROUP 1	$ 30.34	13.75
GROUP 2	$ 30.49	13.75
GROUP 3	$ 30.61	13.75
GROUP 4	$ 30.50	13.75
Truck drivers (AUDRAIN, BOLLINGER, BOONE, CALLAWAY, CAPE GIRARDEAU, CARTER, COLE, CRAWFORD, DENT, GASCONADE, IRON, MACON, MADISON, MARIES, MARION, MILLER, MISSISSIPPI, MONROE, MONTGOMERY, NEW MADRID, OSAGE, PEMISCOT, PERRY, PHELPS, PIKE, PULASKI, RALLS, REYNOLDS, ST. FRANCOIS, STE. GENEVIEVE, SCOTT, SHANNON, SHELBY, STODDARD, TEXAS, WASHINGTON AND WAYNE COUNTIES)		
GROUP 1	$ 31.07	13.75
GROUP 2	$ 31.22	13.75
GROUP 3	$ 31.34	13.75
GROUP 4	$ 31.23	13.75
Truck drivers (FRANKLIN, JEFFERSON and ST. CHARLES COUNTIES)		
GROUP 1	$ 33.43	13.75
GROUP 2	$ 33.58	13.75
GROUP 3	$ 33.65	13.75
GROUP 4	$ 33.54	13.75
Truck drivers (LINCOLN and WARREN COUNTIES)		
GROUP 1	$ 32.08	13.75
GROUP 2	$ 33.23	13.75

GROUP 3.....$ 32.30 13.75
GROUP 4.....$ 32.19 13.75

TRUCK DRIVERS CLASSIFICATIONS:

GROUP 1: Flat Bed Trucks, Single Axle; Station Wagons; Pickup Trucks; Material Trucks, Single Axle; Tank Wagon, Single Axle

GROUP 2: Agitator and Transit Mix Trucks

GROUP 3: Flat Bed Trucks, Tandem Axle; Articulated Dump Trucks; Material Trucks, Tandem Axle; Tank Wagon, Tandem Axle

GROUP 4: Semi and/or Pole Trailers; Winch, Fork & Steel Trucks; Distributor Drivers and Operators; Tank Wagon,
Semi-Trailer; Insley Wagons, Dumpsters, Half-Tracks, Speedace, Euclids and other similar equipment; A-Frame and Derrick Trucks; Float or Low Boy

---
--- TEAM0056-001 05/01/2020

	Rates	Fringes
Truck drivers (ANDREW, BARTON, BATES, BENTON, CALDWELL, CAMDEN, CARROLL, CEDAR, CHARITON, CHRISTIAN, CLINTON, COOPER, DADE, DALLAS, DAVIESS, DEKALB, DOUGLAS, GREENE, HENRY, HICHKORY, HOWARD, JASPER, LACLEDE, LAWRENCE, LINN, LIVINGSTON, MONITEAU, MORGAN, NEWTON, PETTIS, POLK, RANDOLPH, ST. CLAIR, SALINE, VERNON, WEBSTER AND WRIGHT COUNTIES)		
GROUP 1	$ 31.37	14.25
GROUP 2	$ 31.53	14.25
GROUP 3	$ 31.52	14.25
GROUP 4	$ 31.64	14.25
Truck drivers: (ATCHISON, BARRY, GENTRY, GRUNDY, HARRISON, HOLT, MCDONALD, MERCER, NODAWAY, OZARK,		

STONE, SULLIVAN,
TANEY AND WORTH
COUNTIES)
GROUP 1.....$ 30.64 14.25

GROUP 2.....$ 30.80 14.25
GROUP 3.....$ 30.79 14.25
GROUP 4.....$ 30.91 14.25

Truck drivers;
(BUCHANAN, JOHNSON
AND LAFAYETTE
COUNTIES)
GROUP 1.....$ 32.58 14.25
GROUP 2.....$ 32.69 14.25
GROUP 3.....$ 32.73 14.25
GROUP 4.....$ 32.80 14.25

TRUCK DRIVER CLASSIFICATIONS

GROUP 1: Flat bed trucks single axle; station wagons; pickup trucks; material trucks single axle; tank wagons single
axle.

GROUP 2: Agitator and transit mix-trucks.

GROUP 3: Flat bed trucks tandem axle; articulated dump trucks; material trucks tandem axle; tank wagons tandem axle.

GROUP 4: Semi and/or pole trailers; winch, fork & steel trucks; distributor drivers & operators; tank wagons semi- trailer; insley wagons, dumpsters, half-tracks, speedace, euclids & other similar equipment; A-frames and derrick
trucks; float or low boy.

--- TEAM0245-001 03/26/2012

BARRY, BARTON, CAMDEN, CEDAR, CHRISTIAN, DALLAS, DENT, DOUGLAS, GREENE, HICKORY, HOWELL, JASPER, LACLEDE, LAWRENCE, MCDONALD,
MILLER, NEWTON, OZARK, PHELPS, POLK, PULASKI, SHANNON, STONE, TANEY, TEXAS, VERNON, WEBSTER AND WRIGHT COUNTIES

	Rates	Fringes
Truck drivers:		
Traffic Control Service Driver	$ 20.45	0.00

PAID HOLIDAYS: New Year's Day, Decoration Day, July 4th, Labor Day, Thanksgiving Day, Christmas Day, employee's birthday and 2 personal days.

--- TEAM0541-001 04/01/2020

CASS, CLAY, JACKSON, PLATTE AND RAY COUNTIES

	Rates	Fringes
Truck drivers:		
GROUP 1	$ 33.36	16.25
GROUP 2	$ 32.79	16.25
GROUP 3	$ 32.27	16.25

TRUCK DRIVERS CLASSIFICATIONS

GROUP 1: Mechanics and Welders, Field; A-Frame Low Boy-Boom ruck Driver.

GROUP 2: Articulated Dump Truck; Insley Wagons: Dump Trucks, Excavating, 5 cu yds and over; Dumpsters; Half-Tracks:
Speedace: Euclids & similar excavating equipment
Material trucks, Tandem Two teams; Semi-Trailers; Winch trucks-Fork trucks; Distributor Drivers and Operators; Agitator and
Transit Mix; Tank Wagon Drivers, Tandem or Semi; One Team; Station Wagons; Pickup Trucks; Material Trucks, Single
Axle; Tank Wagon Drivers, Single

Axle GROUP 3: Oilers and Greasers

- Field

--- TEAM0682-002 05/01/2017

ST LOUIS CITY AND COUNTY

	Rates	Fringes
Truck drivers:		
GROUP 1	$ 33.30	13.79+a+b+c+d
GROUP 2	$ 33.50	13.79+a+b+c+d
GROUP 3	$ 33.60	13.79+a+b+c+d

a. PENSION: 5/1/2012 - $182.20 per week.

b. HAZMAT PREMIUM: If Hazmat certification on a job site is required by a state or federal agency or requested by
project owner or by the employer, employees on that job site shall receive $1.50 premium pay.

TRUCK DRIVERS CLASSIFICATIONS

GROUP 1 - Pick-up trucks; forklift, single axle; flatbed trucks; job site ambulance, and trucks or trailers of a water level capacity of 11.99 cu. yds. or less

GROUP 2 - Trucks or trailers of a water level capacity of 12.0 cu yds. up to 22.0 cu yds. including euclids, speedace and similar equipment of same capacity and compressors

GROUP 3 - Trucks or trailers of a water level capacity of 22.0 cu. yds & over including euclids, speedace & all floats, flatbed trailers, boom trucks, winch trucks, including small trailers, farm wagons tilt-top trailers, field offices, tool trailers, concrete pumps, concrete conveyors & gasoline tank trailers and truck mounted mobile concrete mixers

FOOTNOTE FOR TRUCK DRIVERS:

c. PAID HOLIDAYS: Christmas Day, Independence Day, Labor Day, Memorial Day, Veterans Day, New Years Day, Thanksgiving Day

d. PAID VACATION: 3 days paid vacation for 600 hours of service in any one contract year; 4 days paid vacation for 800 hours of service in any one contract year; 5 days paid vacation for 1,000 hours of service in any one contract year. When such an employee has completed 3 years of continuous employment with the same employer and then works the above required number of hours, he shall receive double the number of days of vacation specified above. When such an employee has completed 10 years of continuous employment with the same employer and then works the above required number of hours, he shall receive triple the number of days of vacation specified above. When such an employee has completed 15 years of continuous employment with the same employer and then works the above required number of hours, he shall receive 4 times the number of days of vacation specified above.

WELDERS - Receive rate prescribed for craft performing operation to which welding is incidental.

==========

Note: Executive Order (EO) 13706, Establishing Paid Sick Leave for Federal Contractors applies to all contracts subject to the Davis-Bacon Act for which the contract is awarded (and any solicitation was issued) on or after January 1, 2017.

I
f this contract is covered by the EO, the contractor must provide
employees with 1 hour of paid sick leave for every 30 hours they work, up to 56 hours of paid sick leave each year.
Employees must be permitted to use paid sick leave for their own illness, injury or other health-related needs, including preventive care; to assist a family member (or person who is
like family to the employee) who is ill, injured, or has other health-related needs, including preventive care; or for reasons resulting from, or to assist a family member (or person who is like family to the employee) who is a victim of, domestic
violence, sexual assault, or stalking. Additional information on contractor requirements and worker protections under the EO is available at www.dol.gov/whd/govcontracts.

Unlisted classifications needed for work not included within the scope of the classifications listed may be added after
award only as provided in the labor standards contract clauses (29CFR 5.5 (a) (1) (ii)).

The body of each wage determination lists the classification and wage rates that have been found to be prevailing for the cited type(s) of construction in the area covered by the wage determination. The classifications are listed in alphabetical order of ""identifiers"" that indicate whether the particular rate is a union rate (current union negotiated rate for local), a survey rate (weighted average rate) or a union average rate
(weighted union average

rate). Union Rate

Identifiers

A four letter classification abbreviation identifier enclosed in dotted lines beginning with characters other than ""SU"" or ""UAVG"" denotes that the union classification and rate were
prevailing for that classification in the survey. Example: PLUM0198-005 07/01/2014. PLUM is an abbreviation identifier of the union which prevailed in the survey for this
classification, which in this example would be Plumbers. 0198 indicates the local union number or district council number
where applicable, i.e., Plumbers Local 0198. The next

number, 005 in the example, is an internal number used in processing
the wage determination. 07/01/2014 is the effective date of the most current negotiated rate, which in this example is July 1, 2014.

Union prevailing wage rates are updated to reflect all rate changes in the collective bargaining agreement (CBA) governing this classification and rate.

Survey Rate Identifiers

Classifications listed under the ""SU"" identifier indicate that no one rate prevailed for this classification in the survey and the published rate is derived by computing a weighted average
rate based on all the rates reported in the survey for that classification. As this weighted average rate includes all rates reported in the survey, it may include both union and
non-union rates. Example: SULA2012-007 5/13/2014. SU indicates the rates are survey rates based on a weighted average
calculation of rates and are not majority rates. LA indicates the State of Louisiana. 2012 is the year of survey on which
these classifications and rates are based. The next number, 007 in the example, is an internal number used in producing the
wage determination. 5/13/2014 indicates the survey completion date for the classifications and rates under that identifier.

Survey wage rates are not updated and remain in effect until a new survey is conducted.

Union Average Rate Identifiers

Classification(s) listed under the UAVG identifier indicate that no single majority rate prevailed for those
classifications; however, 100% of the data reported for the classifications was union data. EXAMPLE: UAVG-OH-0010
08/29/2014. UAVG indicates that the rate is a weighted union average rate. OH indicates the state. The next number, 0010 in the example, is an internal number used in producing the wage determination. 08/29/2014 indicates the survey completion date for the classifications and rates under that identifier.

A UAVG rate will be updated once a year, usually in January of each year, to reflect a weighted average of the current
negotiated/CBA rate of the union locals from which the rate is based.

---- WAGE DETERMINATION APPEALS PROCESS

1.) Has there been an initial decision in the matter?
This can be:

* an existing published wage determination
* a survey underlying a wage determination
* a Wage and Hour Division letter setting forth a position on a wage determination matter
* a conformance (additional classification and rate) ruling

On survey related matters, initial contact, including requests for summaries of surveys, should be with the Wage and Hour
Regional Office for the area in which the survey was conducted because those Regional Offices have responsibility for the
Davis-Bacon survey program. If the response from this initial contact is not satisfactory, then the process described in 2.) and 3.) should be followed.

With regard to any other matter not yet ripe for the formal process described here, initial contact should be with the Branch of Construction Wage Determinations. Write to:

Branch of Construction Wage Determinations Wage and Hour Division
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

2.) If the answer to the question in 1.) is yes, then an interested party (those affected by the action) can request review and reconsideration from the Wage and Hour Administrator (See 29 CFR Part 1.8 and 29 CFR Part 7). Write to:

Wage and Hour Administrator
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

The request should be accompanied by a full statement of the interested party's position and by any information (wage
payment data, project description, area practice material, etc.) that the requestor considers relevant to the issue.

3.) If the decision of the Administrator is not favorable, an interested party may appeal directly to the Administrative

Review Board (formerly the Wage Appeals Board). Write to:

Administrative Review Board
U.S. Department of Labor
200 Constitution Avenue, N.W.
Washington, DC 20210

4.) All decisions by the Administrative Review Board are final.

==========

==== END OF GENERAL DECISION"

Missouri
Division of Labor Standards
WAGE AND HOUR SECTION

MICHAEL L. PARSON, Governor

Annual Wage Order No. 27

Section 042
HENRY COUNTY

In accordance with Section 290.262 RSMo 2000, within thirty (30) days after a certified copy of this Annual Wage Order has been filed with the Secretary of State as indicated below, any person who may be affected by this Annual Wage Order may object by filing an objection in triplicate with the Labor and Industrial Relations Commission, P.O. Box 599, Jefferson City, MO 65102-0599. Such objections must set forth in writing the specific grounds of objection. Each objection shall certify that a copy has been furnished to the Division of Labor Standards, P.O. Box 449, Jefferson City, MO 65102-0449 pursuant to 8 CSR 20-5.010(1). A certified copy of the Annual Wage Order has been filed with the Secretary of State of Missouri.

Original Signed by
Taylor Burks, Director
Division of Labor Standards

Filed With Secretary of State: **March 10, 2020**

Last Date Objections May Be Filed: **April 9, 2020**

Prepared by Missouri Department of Labor and Industrial Relations

OCCUPATIONAL TITLE	**Prevailing Hourly Rate
Asbestos Worker	*$21.83
Boilermaker	*$21.83
Bricklayer	$57.07
Carpenter	**$56.26**
Lather	
Linoleum Layer	
Millwright	
Pile Driver	
Cement Mason	*$21.83
Plasterer	
Communications Technician	*$21.83
Electrician (Inside Wireman)	**$63.69**
Electrician Outside Lineman	*$21.83
Lineman Operator	
Lineman - Tree Trimmer	
Groundman	
Groundman - Tree Trimmer	
Elevator Constructor	*$21.83
Glazier	*$21.83
Ironworker	*$21.83
Laborer	$41.03
General Laborer	
First Semi-Skilled	
Second Semi-Skilled	
Mason	*$21.83
Marble Mason	
Marble Finisher	
Terrazzo Worker	
Terrazzo Finisher	
Tile Setter	
Tile Finisher	
Operating Engineer	*$21.83
Group I	
Group II	
Group III	
Group III-A	
Group IV	
Group V	
Painter	*$21.83
Plumber	$65.79
Pipe Fitter	
Roofer	*$21.83
Sheet Metal Worker	$65.35
Sprinkler Fitter	*$21.83
Truck Driver	*$21.83
Truck Control Service Driver	
Group I	
Group II	
Group III	
Group IV	

*The Division of Labor Standards received less than 1,000 reportable hours for this occupational title. Public works contracting minimum wage is established for this occupational title using data provided by Missouri Economic Research and Information Center.

**The Prevailing Hourly Rate includes any applicable fringe benefit amounts for each occupational title.

Heavy Construction Rates for
HENRY County

Section 042

OCCUPATIONAL TITLE	**Prevailing Hourly Rate
Carpenter	*$21.83
Millwright	
Pile Driver	
Electrician (Outside Lineman)	*$21.83
Lineman Operator	
Lineman - Tree Trimmer	
Groundman	
Groundman - Tree Trimmer	
Laborer	$39.29
General Laborer	
Skilled Laborer	
Operating Engineer	$51.96
Group I	
Group II	
Group III	
Group IV	
Truck Driver	*$21.83
Truck Control Service Driver	
Group I	
Group II	
Group III	
Group IV	

Use Heavy Construction Rates on Highway and Heavy construction in accordance with the classifications of construction work established in 8 CSR 30-3.040(3).

Use Building Construction Rates on Building construction in accordance with the classifications of construction work established in 8 CSR 30-3.040(2).

If a worker is performing work on a heavy construction project within an occupational title that is not listed on the Heavy Construction Rate Sheet, use the rate for that occupational title as shown on the Building Construction Rate Sheet.

*The Division of Labor Standards received less than 1,000 reportable hours for this occupational title. Public works contracting minimum wage is established for this occupational title using data provided by Missouri Economic Research and Information Center.

**The Prevailing Hourly Rate includes any applicable fringe benefit amounts for each occupational title.

ANNUAL WAGE ORDER NO. 27

3/20

OVERTIME
and
HOLIDAYS

OVERTIME

For all work performed on a Sunday or a holiday, not less than twice (2x) the prevailing hourly rate of wages for work of a similar character in the locality in which the work is performed or the public works contracting minimum wage, whichever is applicable, shall be paid to all workers employed by or on behalf of any public body engaged in the construction of public works, exclusive of maintenance work.

For all overtime work performed, not less than one and one-half (1½) the prevailing hourly rate of wages for work of a similar character in the locality in which the work is performed or the public works contracting minimum wage, whichever is applicable, shall be paid to all workers employed by or on behalf of any public body engaged in the construction of public works, exclusive of maintenance work or contractual obligation. For purposes of this subdivision, **"overtime work"** shall include work that exceeds ten hours in one day and work in excess of forty hours in one calendar week; and

A thirty-minute lunch period on each calendar day shall be allowed for each worker on a public works project, provided that such time shall not be considered as time worked.

HOLIDAYS

January First;
The last Monday in May;
July Fourth;
The first Monday in September;
November Eleventh;
The fourth Thursday in November; and
December Twenty-Fifth;

If any holiday falls on a Sunday, the following Monday shall be considered a holiday.

SECTION 5
TECHNICAL SPECIFICATIONS

SUPPLEMENTAL SPECIFICATIONS

SS-101	Safety Plan Compliance Document (SPCD)
SS-110	Standard Specifications
SS-120	Construction Safety and Security
SS-130	Trench and Excavation Safety Systems
SS-262	Tiedown Anchors
SS-300	Basic Electrical Requirements
SS-301	Electrical Demolition and Relocation Work
SS-310	Airport Lighting Systems

TECHNICAL SPECIFICATIONS

C-100	Contractor Quality Control Program (CQCP)
C-102	Temporary Air and Water Pollution, Soil Erosion, and Siltation Control
C-105	Mobilization
L-108	Underground Power Cable for Airports
L-110	Airport Underground Electrical Duct Banks and Conduits
L-115	Electrical Manholes and Junction Structures
L-125	Installation of Airport Lighting Systems
P-101	Preparation/Removal of Existing Pavements
P-152	Excavation, Subgrade, and Embankment
P-158	Fly Ash Treated Subgrade
P-208	Aggregate Base Course
P-403	Asphalt Mix Pavement Surface Course
P-501	Cement Concrete Pavement
P-602	Emulsified Asphalt Prime Coat
P-603	Emulsified Asphalt Tack Coat
P-604	Compression Joint Seals for Concrete Pavements
P-620	Runway and Taxiway Marking
D-701	Pipe for Storm Drains and Culverts
T-901	Seeding
T-905	Topsoil
T-908	Mulching

APPENDIX

The latest FAA Advisory Circulars may be found on the FAA website: www.faa.gov/airports/resources/advisory_circulars

150/5000-13A	Announcement Of Availability: RTCA Inc., Document RTCA-221
150/5000-15B	Announcement of Availability of Airport-Related Research and Development Products
150/5000-16	Announcement of Availability of the Guide for Private Flyers - U.S. International Airports
150/5000-17	Critical Aircraft and Regular Use Determination
150/5000-9A	Announcement of Availability Report No. DOT/FAA/PP/92-5, Guidelines for the Sound Insulation of Residences Exposed to Aircraft Operations
150/5020-1	Noise Control and Compatibility Planning for Airports
150/5020-2	Guidance on the Balanced Approach to Noise Management
150/5050-4A	Community Involvement in Airport Planning
150/5050-8	Environmental Management Systems for Airport Sponsors
150/5060-5	Airport Capacity And Delay
150/5070-6B	Airport Master Plans
150/5070-7	The Airport System Planning Process
150/5100-13C	Development of State Aviation Standards for Airport Pavement Construction
150/5100-14E	Architectural, Engineering, and Planning Consultant Services for Airport Grant Projects
150/5100-17	Land Acquisition and Relocation Assistance for Airport Improvement Program Assisted Projects (Consolidated through Change 7)
150/5100-19D	Guide for Airport Financial Reports Filed by Airport Sponsors
150/5100-20	Guidance on the Extraction of Oil and Gas on Federally Obligated Airports
150/5100-21	State Block Grant Program
150/5150-2C	Federal Surplus Personal Property Program for Public Airport Purposes
150/5190-4A	A Model Zoning Ordinance to Limit Height of Objects Around Airports
150/5190-6	Exclusive Rights at Federally Obligated Airports
150/5190-7	Minimum Standards for Commercial Aeronautical Activities
150/5200-12C	First Responders' Responsibility for Protecting Evidence at the Scene of an Aircraft Accident/Incident
150/5200-18C	Airport Safety Self-Inspection
150/5200-28F	Notices to Airmen (NOTAMs) for Airport Operators
150/5200-29A	Announcement Of Availability Of Airport Self-Inspection DVD
150/5200-30D	Airport Field Condition Assessments and Winter Operations Safety
150/5200-31C	Airport Emergency Plan (Consolidated AC includes Change 2)
150/5200-32B	Reporting Wildlife Aircraft Strikes
150/5200-33C	Hazardous Wildlife Attractants On or Near Airports
150/5200-34A	Construction or Establishment of Landfills near Public Airports
150/5200-35A	Submitting the Airport Master Record in Order to Activate a New Airport
150/5200-36B	Qualifications for Wildlife Biologist Conducting Wildlife Hazard Assessments and Training Curriculums for Airport Personnel Involved in Controlling Wildlife Hazards on Airports
150/5200-37	Introduction to Safety Management Systems (SMS) for Airport Operators

150/5200-38	Protocol for the Conduct and Review of Wildlife Hazard Site Visits, Wildlife Hazard Assessments, and Wildlife Hazard Management Plans
150/5210-13C	Airport Water Rescue Plans and Equipment
150/5210-14B	Aircraft Rescue Fire Fighting Equipment, Tools and Clothing
150/5210-15A	Aircraft Rescue and Firefighting Station Building Design
150/5210-17C	Programs for Training of Aircraft Rescue and Firefighting Personnel
150/5210-18A	Systems for Interactive Training Of Airport Personnel
150/5210-19A	Driver's Enhanced Vision System (DEVS)
150/5210-20A	Ground Vehicle Operations to include Taxiing or Towing an Aircraft on Airports
150/5210-22	Airport Certification Manual (ACM)
150/5210-23	ARFF Vehicle and High Reach Extendable Turret (HRET) Operation, Training and Qualifications
150/5210-24	Airport Foreign Object Debris (FOD) Management
150/5210-25A	Performance Specification for Airport Vehicle Runway Incursion Warning Systems (RIWS)
150/5210-5D	Painting, Marking, and Lighting of Vehicles Used on an Airport
150/5210-6D	Aircraft Fire Extinguishing Agents
150/5210-7D	Aircraft Rescue and Fire Fighting Communications
150/5220-10E	Guide Specification for Aircraft Rescue and Fire Fighting (ARFF) Vehicles
150/5220-16E	Automated Weather Observing Systems (AWOS) for Non-Federal Applications - with Change 1
150/5220-17B	Aircraft Rescue and Fire Fighting (ARFF) Training Facilities
150/5220-18A	Buildings for Storage and Maintenance of Airport Snow and Ice Control Equipment and Materials
150/5220-20A	Airport Snow and Ice Control Equipment
150/5220-21C	Aircraft Boarding Equipment
150/5220-22B	Engineered Materials Arresting Systems (EMAS) for Aircraft Overruns
150/5220-23	Frangible Connections
150/5220-24	Foreign Object Debris Detection Equipment
150/5220-25	Airport Avian Radar Systems
150/5220-26	Airport Ground Vehicle Automatic Dependent Surveillance - Broadcast (ADS-B) Out Squitter Equipment
150/5220-9A	Aircraft Arresting Systems
150/5230-4B	Aircraft Fuel Storage, Handling, Training, and Dispensing on Airports
150/5300-13A	Airport Design
150/5300-14D	Design of Aircraft Deicing Facilities
150/5300-15A	Use Of Value Engineering For Engineering And Design Of Airport Grant Projects
150/5300-16B	General Guidance and Specifications for Aeronautical Surveys: Establishment of Geodetic Control and Submission to the National Geodetic Survey
150/5300-17C	Standards for Using Remote Sensing Technologies in Airport Surveys (Consolidated to Include Change 1)
150/5300-18B	General Guidance and Specifications for Submission of Aeronautical Surveys to NGS: Field Data Collection and Geographic Information System (GIS) Standards
150/5300-19	Airport Data and Information Program
150/5300-7B	FAA Policy on Facility Relocations Occasioned by Airport Improvements or Changes
150/5320-12C	Measurement, Construction, and Maintenance of Skid Resistant Airport Pavement Surfaces

150/5320-15A	Management Of Airport Industrial Waste
150/5320-17A	Airfield Pavement Surface Evaluation and Rating Manuals
150/5320-5D	Airport Drainage Design
150/5320-6F	Airport Pavement Design and Evaluation
150/5325-4B	Runway Length Requirements for Airport Design
150/5335-5C	Standardized Method of Reporting Airport Pavement Strength - PCN
150/5340-18G	Standards for Airport Sign Systems
150/5340-1M	Standards for Airport Markings
150/5340-26C	Maintenance of Airport Visual Aid Facilities
150/5340-30J	Design and Installation Details for Airport Visual Aids
150/5340-5D	Segmented Circle Airport Marker System
150/5345-10H	Specification for Constant Current Regulators and Regulator Monitors
150/5345-12F	Specification for Airport and Heliport Beacons
150/5345-13B	Specification for L-841 Auxiliary Relay Cabinet Assembly for Pilot Control of Airport Lighting Circuits
150/5345-26D	FAA Specification For L-823 Plug And Receptacle, Cable Connectors
150/5345-27E	Specification for Wind Cone Assemblies
150/5345-28H	Precision Approach Path Indicator (PAPI) Systems
150/5345-39D	Specification for L-853, Runway and Taxiway Retroreflective Markers
150/5345-3G	Specification for L-821, Panels for the Control of Airport Lighting
150/5345-42J	Specification for Airport Light Bases, Transformer Housings, Junction Boxes, and Accessories
150/5345-43J	Specification for Obstruction Lighting Equipment
150/5345-44K	Specification for Runway and Taxiway Signs
150/5345-45C	Low-Impact Resistant (LIR) Structures
150/5345-46E	Specification for Runway and Taxiway Light Fixtures
150/5345-47C	Specification for Series to Series Isolation Transformers for Airport Lighting Systems
150/5345-49D	Specification L-854, Radio Control Equipment
150/5345-50B	Specification for Portable Runway and Taxiway Lights
150/5345-51B	Specification for Discharge-Type Flashing Light Equipment
150/5345-52A	Generic Visual Glideslope Indicators (GVGI)
150/5345-53D	Airport Lighting Equipment Certification Program
150/5345-54B	Specification for L-884, Power and Control Unit for Land and Hold Short Lighting Systems
150/5345-55A	Specification for L-893, Lighted Visual Aid to Indicate Temporary Runway Closure
150/5345-56B	Specification for L-890 Airport Lighting Control and Monitoring System (ALCMS)
150/5345-5B	Circuit Selector Switch
150/5345-7F	Specification for L-824 Underground Electrical Cable for Airport Lighting Circuits
150/5360-12F	Airport Signing and Graphics
150/5360-13A	Airport Terminal Planning
150/5360-14A	Access to Airports by Individuals with Disabilities
150/5370-10H	Standard Specifications for Construction of Airports
150/5370-11B	Use of Nondestructive Testing in the Evaluation of Airport Pavements
150/5370-12B	Quality Management for Federally Funded Airport Construction Projects

150/5370-13A	Off-Peak Construction of Airport Pavements Using Hot-Mix Asphalt
150/5370-14B	Hot Mix Asphalt Paving Handbook
150/5370-15B	Airside Applications for Artificial Turf
150/5370-16	Rapid Construction of Rigid (Portland Cement Concrete) Airfield Pavements
150/5370-17	Airside Use of Heated Pavement Systems
150/5370-2G	Operational Safety on Airports During Construction
150/5380-6C	Guidelines and Procedures for Maintenance of Airport Pavements
150/5380-7B	Airport Pavement Management Program (PMP)
150/5380-9	Guidelines and Procedures for Measuring Airfield Pavement Roughness
150/5390-2C	Heliport Design
150/5395-1B	Seaplane Bases

CONSTRUCTION SAFETY & PHASING PLAN (CSPP)
FOR THE

CLINTON REGIONAL AIRPORT
CLINTON, MISSOURI

GLY Apron Phase 2 Through 6

PROJECT NO. 19-022A-1

Prepared by:

GARVER

February, 2021

19A15701

This Construction Safety and Phasing Plan (CSPP) document supplements the plans and specifications for the GLY Apron Phase 2 Through 6 project at the Clinton Regional Airport and has been written in compliance with FAA Advisory Circular (AC) 150-5370-2G, *Operational Safety on Airport During Construction*. The construction sequencing was developed provides logical order to the construction of the project and maintains access to the airfield throughout construction.

Coordination

Project Contacts. The following table lists the stakeholders associated with the design of the project.

Organization	Role	Representative	Contact Information
City of Clinton, MO	Airport Sponsor	Christy Maggi, City Administrator	(660) 885-6121
Clinton Regional Airport	Airport Manager	Wallace White	(660) 885-8889
MODOT	Project Manager	Darrell Goth	(573) 526-7913
Garver, LLC	Design Consultant	Jason Fuehne, PE	(913) 424-8878

Design Submittals. The parties listed above coordinated throughout the design to assure compliance with FAA standards and procedures. The following table summarizes the project schedule to date.

Task Item	Baseline Schedule
Execute Design Contracts	7/16/19
Submit CSPP and Design Report	11/25/20
Submit 90% Plans and Specs	11/25/20
Submit Final Plans and Specs (Anticipated)	12/21/20
Bid Opening (Anticipated)	2/1/20
Submit Grant Application (Anticipated)	2/15/21
Construction Notice to Proceed (Anticipated)	3/15/21
Final Inspection (Anticipated)	6/28/21
Grant Closeout (Anticipated)	8/16/21

Pre-Bid Meeting. A pre-bid meeting will be conducted virtually on Tuesday January 19, 2021 during the bidding phase of the project to inform prospective contractors of the project scope, proposal requirements, labor requirements, civil rights requirements, and Safety Plan Compliance Document (SPCD).

Preconstruction Meeting. A pre-construction conference will be conducted prior to any construction on the airfield. This meeting will discuss operational safety during construction, construction sequencing, quality control/quality assurance procedures, labor requirements,

communication protocol, and construction schedule. The meeting will be scheduled prior to issuing a Notice to Proceed for construction.

Construction Progress Meetings. Progress meetings will be conducted throughout construction on a weekly basis. Operational safety will be a key topic at each meeting. The meetings will also address project schedule, weekly construction activities, NOTAM requirements, project budget, potential change orders, deviations from the contract documents, coordination with the FAA, Airport Sponsor or tenants, and coordination with opening/closing airfield pavements. The following table will be completed prior to the pre-construction conference to list the parties involved during construction.

Organization	Role	Representative	Contact Information
City of Clinton, MO	Airport Sponsor	Christy Maggi, City Administrator	(660) 885-6121
Clinton Regional Airport	Airport Manager	Wallace White	(660) 885-8889
MODOT	Project Manager	Darrell Goth	(573) 526-7913
Garver, LLC	Design Consultant	Jason Fuehne, PE	(913) 696-9755 (913) 424-8878 (M)
	Construction Observer (anticipated)	Patrick Barnes	(318) 751-6814
	Quality Assurance Testing	TBD	
Contractor	Project Manager		
	Superintendent		
	Safety Officer		
Subcontractors			
		Emergency	
Hospital	Golden Valley Memorial	1600 N 2nd St. Clinton, MO 64735	(660) 885-5511
Fire Department	Clinton Fire Department		(660) 885-2560
Police Department	Clinton Police Department		(660) 885-2679
Sheriff's Department	Henry County Sheriff		(660) 885-7021
		Utilities	
One-Call System		Missouri One-Call System	811

Water	Henry County Water Co.	(660) 885-2157
Electric	Osage Valley Electric Cooperative	(660) 679-3131
	Evergy	(660) 890-2689
Sewer	City of Clinton	(620) 885-6611
Natural Gas	Empire District Gas	(660) 885-1084

Construction Sequencing

The project consists of a base bid and alternate bid that includes the following elements:

1. Reconstruction of the GA Apron in Phase 2 includes the removal of the existing Apron adjacent to the Phase 1 portion that was previously constructed and the construction of a new concrete apron. Phase 2 will be split into subphases. Phase 2A will require a transition to the SW to tie into existing pavement surface. Phase 2B will include the improvement of the existing swale and flat grades around the Phase 1 area and the lowering of the pipe under Taxiway A. These improvements will help with drainage and improve pavement life. Both Phase 2A and 2B will require a transition to the W existing GA Apron surface.

2. The alternate bid, if selected will remove the W transition from the project and will construct the Phase 3 pavement, which is in the region of the existing GA apron.

3. Also, as a part of the ultimate apron, hangar, and taxiway layout that this project is working towards, the electrical homeruns for Runways 4-22 and 18-36 are being updated and relocated.

This project will be completed in two phase. The following table summarizes the operational impacts of construction.

Operational Requirement	**Normal**	**Phase 2A**	**Phase 2B**	**Phase 3**
TWY A	Open	Open	Open	Open
GA Apron	Open	Restricted	Restricted	Closed
Duration	N/A	20 Days	25 Days	30 Days

Construction Staging Areas. The contractor staging area and employee parking is located along airport access road to the north of the GA Apron construction site. The staging area is depicted on the phasing plans included in Appendix A.

Construction Access and Haul Routes. The contractor shall access the airport from Highway 7 (E Division Rd.). The access and haul route locations are identified on the phasing plans included in Appendix A.

Lighting and Marking Changes. Elevated retro-reflective markers will be installed around apron pavement. Tie-down markings will be installed for aircraft parking as well as taxiway centerline and non movement area markings.

Areas and Operations Affected by the Construction Activity
The Safety and Phasing Plans depict the impacts to the airfield during the construction activities and the temporary lighting, marking and barricades necessary to maintain a safe operating environment during each phase of construction. The phasing plans are included in Appendix A of this document.

Protection of Navigational Aids (NAVAIDs)
The Runway 4/22 and 18/36 Precision Approach Path Indicators (PAPIs) will remain operational during the construction. The PAPIs should not require adjustment as a result of the scope of this project. Should the scope of the project require an adjustment of the PAPIs, the Contractor or Engineer shall notify the FAA Airways Facilities contact immediately and address the necessary changes in the SPCD.

Contractor Access
Location of Stockpiled Construction Materials. The Contractor's staging area will serve as the location to stockpile construction materials. The staging area is located along the airport entrance drive, outside of the apron fence, and includes the employee parking area. A temporary fence to secure the staging area may be installed at the contractor's discretion throughout construction. Upon completion the fence shall be removed, and the staging area shall be restored to the original condition prior to construction operations. Stockpiled material shall not exceed 15 feet in height and will be restricted to the contractor staging area.

Vehicle and Pedestrian Operations. The Contractor shall access the air operations area (AOA) via Highway 7 for construction on the airfield. The access routes are depicted on the plans included in Appendix A. Written approval from the City of Clinton is required to modify access routes.

Employees shall park their personal vehicles in the designated employee parking area defined on the phasing plans. Personal vehicles will not be allowed within the AOA. The contractor will provide vehicles that are authorized to operate within the AOA to transport employees to the construction area. These vehicles will be identified in accordance with AC 150/5210-5D. The vehicles shall have a flag or beacon attached. Vehicles operating at night will be required to have a rotating beacon. In addition to the beacons and/or flags, construction vehicles shall be clearly identified with placards displaying the company name on each side of the vehicle. Vehicles requiring access to the AOA without proper identification or safety equipment shall be escorted by vehicles with proper equipment and identification.

WILDLIFE MANAGEMENT
The following notes were added to the plans to communicate the Airport's wildlife management strategies.

THE CONTRACTOR SHALL REVIEW AND ADHERE TO THE CONTENTS OF THE AIRPORT OPERATOR'S WILDLIFE HAZARD MANAGEMENT PLAN. THE CONTRACTOR SHALL ALSO REVIEW AC 150/5200-33, HAZARDOUS WILDLIFE ATTRACTANTS ON OR NEAR AIRPORTS, AND CERTALERT 98-05, GRASSES ATTRACTIVE TO HAZARDOUS WILDLIFE (www.faa.gov). THE CONTRACTOR SHALL CAREFULLY CONTROL AND CONTINUOUSLY REMOVE WASTE OR LOOSE MATERIALS THAT MIGHT ATTRACT WILDLIFE. CONTRACTOR PERSONNEL MUST BE AWARE OF AND AVOID CONSTRUCTION ACTIVITIES THAT CAN CREATE

WILDLIFE HAZARDS ON AIRPORTS. THE CONTRACTOR SHALL MITIGATE THE FOLLOWING ITEMS.

A. TRASH - THE CONTRACTOR SHALL PERFORM TRASH CLEAN-UP ON A DAILY BASIS.

B. STANDING WATER - THE CONTRACTOR SHALL PROVIDE TEMPORARY DRAINAGE DURING CONSTRUCTION TO AVOID STANDING WATER.

C. TALL GRASS AND SEEDS - THE CONTRACTOR SHALL ADHERE TO THE REQUIREMENTS OF SECTION T-901, SEEDING OF THE CONTRACT DOCUMENTS AND SPECIFICATIONS.

D. POORLY MAINTAINED FENCING AND GATES - THE CONTRACTOR SHALL IMMEDIATELY REPORT ANY DAMAGE TO GATES OR FENCES. THE CONTRACTOR WILL BE RESPONSIBLE FOR REPAIRS TO ANY GATES OR FENCES CAUSED BY NEGLIGENCE BY THE CONTRACTOR.

E. DISRUPTION OF EXISTING WILDLIFE HABITAT - THE CONTRACTOR SHALL NOTIFY THE AIRPORT IMMEDIATELY OF ANY WILDLIFE SIGHTINGS.

FOREIGN OBJECT DEBRIS (FOD) MANAGEMENT

The following note was added to the plans to communicate the Airport's FOD management strategy.

THE CONTRACTOR SHALL ENSURE THAT THE PAVEMENT SURFACES ARE KEPT CLEAN FROM DIRT, MUD, AND OTHER DEBRIS FROM THE CONTRACTOR'S EQUIPMENT. FREQUENT CLEAN UP IN THE VICINITY OF CONTRACTOR'S WORK AREAS IS REQUIRED. SEE AC 150/5210-24, FOREIGN OBJECT DEBRIS (FOD) MANAGEMENT (WWW.FAA.GOV) FOR FURTHER INSTRUCTION.

HAZARDOUS MATERIALS (HAZMAT) MANAGEMENT

The following note was added to the plans to communicate the Airport's HAZMAT strategy.

IF ANY CONSTRUCTION VEHICLE OR EQUIPMENT IS OPERATED WITHIN AIRPORT PROPERTY, THE CONTRACTOR MUST BE ADEQUATELY PREPARED TO EXPEDITIOUSLY CONTAIN AND CLEAN-UP SPILLS RESULTING FROM FUEL OR HYDRAULIC FLUID LEAKS. SPECIAL CARE MUST ALSO BE TAKEN WHEN HANDLING OR TRANSPORTING HAZARDOUS MATERIALS ON AIRPORT PROPERTY. SEE AC 150/5320-15, MANAGEMENT OF AIRPORT INDUSTRIAL WASTE (WWW.FAA.GOV), FOR FURTHER INSTRUCTION.

NOTIFICATION OF CONSTRUCTION ACTIVITIES

The following notes were added to the plans to define the communication requirements during construction.

A. LIST OF RESPONSIBLE REPRESENTATIVES - A POINT OF CONTACT LIST WILL BE COMPLETED AS PART OF THE SAFETY PLAN COMPLIANCE DOCUMENT (SPCD) AND WILL BE DELIVERED TO ALL PARTIES PRIOR TO CONSTRUCTION.

B. NOTICES TO AIRMEN (NOTAM) - BEFORE BEGINNING ANY CONSTRUCTION ACTIVITY, THE CONTRACTOR MUST, THROUGH THE AIRPORT OPERATOR, GIVE NOTICE USING THE NOTAM SYSTEM OF PROPOSED LOCATION, TIME, AND DATE OF COMMENCEMENT OF CONSTRUCTION. UPON COMPLETION OF WORK AND RETURN OF ALL SUCH AREAS TO STANDARD CONDITIONS, THE CONTRACTOR MUST, THROUGH THE

AIRPORT OPERATOR, VERIFY THE CANCELLATION OF ALL NOTICES ISSUED VIA THE NOTAM SYSTEM.

C. EMERGENCY NOTIFICATION PROCEDURES - IN THE EVENT OF AN EMERGENCY, THE CONTRACTOR SHALL CALL 911, THEN NOTIFY THE ENGINEER AND AIRPORT MANAGER.

D. COORDINATION WITH ARFF PERSONNEL - NO ARFF FACILITIES LOCATED ON-SITE.

E. NOTIFICATION TO THE FAA - THE CONTRACTOR SHALL ENSURE, THROUGH THE ENGINEER, THAT ALL CONSTRUCTION EQUIPMENT OVER 15 FT IN HEIGHT IS AIR SPACED THROUGH THE APPROPRIATE FAA REGIONAL OR DISTRICT OFFICE PRIOR TO USING SUCH EQUIPMENT ON SITE.

F. CONTRACTOR SHALL PROVIDE CONTACT INFORMATION FOR A REPRESENTATIVE WHO CAN RESPOND IMMEDIATELY ON-SITE FOR EMERGENCY MAINTENANCE OF AIRPORT HAZARD LIGHTING AND BARRICADES. DESIGNATED PERSONNEL SHALL BE AVAILABLE 24 HOURS PER DAY EACH DAY DURING CONSTRUCTION ACTIVITIES.

INSPECTION REQUIREMENTS

The following notes were added to the plans to define the inspection requirements during construction.

A. DAILY INSPECTIONS - THE CONTRACTOR SHALL PERFORM DAILY SAFETY INSPECTIONS TO VERIFY ALL CONSTRUCTION OPERATIONS ARE IN CONFORMANCE WITH THE CONSTRUCTION SAFETY AND PHASING PLAN (CSPP).

B. FINAL INSPECTIONS - PRIOR TO OPENING ANY PORTION OF THE AIRPORT TO TRAFFIC, THE CONTRACTOR, ENGINEER, AND AIRPORT OPERATOR SHALL PERFORM A SAFETY INSPECTION OF THE AREA TO BE OPENED TO TRAFFIC TO VERIFY CONFORMANCE WITH THE CSPP AND FAA/MODOT STANDARDS.

UNDERGROUND UTILITIES

The following notes were added to the plans regarding underground utilities.

UNDERGROUND UTILITIES EXIST WITHIN AND ADJACENT TO THE LIMITS OF CONSTRUCTION. AN ATTEMPT HAS BEEN MADE TO LOCATE THESE UTILITIES ON THE PLANS. HOWEVER, ALL EXISTING UTILITIES MAY NOT BE SHOWN AND THE ACTUAL LOCATIONS OF THE UTILITIES MAY VARY FROM THE LOCATIONS SHOWN. PRIOR TO BEGINNING ANY TYPE OF EXCAVATION, THE CONTRACTOR SHALL CONTACT THE UTILITIES INVOLVED AND MAKE ARRANGEMENTS FOR THE LOCATION OF THE UTILITIES ON THE GROUND. THE CONTRACTOR SHALL MAINTAIN THE UTILITY LOCATION MARKINGS UNTIL THEY ARE NO LONGER NECESSARY. MISSOURI STATE LAW, THE UNDERGROUND FACILITIES DAMAGE PREVENTION ACT, REQUIRES TWO WORKING DAYS ADVANCE NOTIFICATION THROUGH THE ONE-CALL SYSTEM CENTER BEFORE EXCAVATING USING MECHANIZED EQUIPMENT OR EXPLOSIVES (EXCEPT IN THE CASE OF AN EMERGENCY). THE ONE-CALL SYSTEM PHONE NUMBER IS 1-800-344-7483. THE CONTRACTOR IS ADVISED THAT THERE IS A SEVERE PENALTY FOR NOT MAKING THIS CALL. NOT ALL UTILITY COMPANIES ARE MEMBERS OF THE 811 ONE-CALL SYSTEM ; THEREFORE, THE CONTRACTOR IS ADVISED TO CONTACT ALL NON-MEMBER UTILITIES AS WELL AS THE ONE-CALL SYSTEM.

PENALTIES

The following notes were added to the plans to define the penalties associated with violating the CSPP.

FAILURE OF THE CONTRACTOR (INCLUDING EMPLOYEES) OR ANY OF THEIR SUBCONTRACTORS (INCLUDING EMPLOYEES) TO COMPLY WITH ATCT INSTRUCTIONS, THE AIRPORT SAFETY PLAN, OR ANY OF THE OTHER REQUIREMENTS OF THE AIRPORT WHILE OPERATING ON AIRPORT PROPERTY, SHALL BE SUBJECT TO THE FOLLOWING:

A. FIRST OFFENSE - THE CONTRACTOR SHALL RECEIVE A FINE OF $1,000.00, AND THE VEHICLE OPERATOR WILL RECEIVE A LOSS PF DRIVING PRIVILEGES ON THE AIRPORT. IN ADDITION, ANY FINES OR PENALTIES IMPOSED ON THE AIRPORT AS A RESULT OF THE INCIDENT WILL BE ASSESSED TO THE CONTRACTOR.

B. SECOND OFFENSE - THE CONTRACTOR SHALL RECEIVE A FINE OF $5,000.00 TO BE DEDUCTED FROM ANY MONIES DUE THE CONTRACTOR, AND THE VEHICLE OPERATOR WILL RECEIVE A LOSS OF DRIVING PRIVILEGES ON THE AIRPORT. IN ADDITION, ANY FINE OR PENALTIES IMPOSED ON THE AIRPORT AS A RESULT OF THE INCIDENT WILL BE ASSESSED TO THE CONTRACTOR.

C. THIRD OFFENSE - WORK WILL BE SUSPENDED. THE CONTRACTOR (INCLUDING EMPLOYEES) AND ANY OF THEIR SUBCONTRACTORS (INCLUDING EMPLOYEES) WHO WILL OPERATE GROUND VEHICLES ON THE AIRPORT SHALL SUCCESSFULLY COMPLETE, FOR A SECOND TIME, FORMALIZED AIRPORT SAFETY TRAINING, TO BE CONDUCTED BY AIRPORT STAFF. WHEN THE CONTRACTOR'S EMPLOYEES HAVE COMPLETED AIRPORT SAFETY TRAINING TO THE SATISFACTION OF THE OWNER, WORK MAY CONTINUE AT THE DISCRETION OF THE OWNER.

RUNWAY AND TAXIWAY VISUAL AIDS

The following notes were added to the plans to discuss visual aids on the airfield.

A. GENERAL - ALL AIRPORT MARKINGS, LIGHTING, SIGNS, AND VISUAL NAVAIDS THAT ARE IN OPERATION MUST BE CLEAR FROM ALL OBSTRUCTIONS. ALL TEMPORARY MARKINGS, SIGNS, LIGHTS, OR OTHER VISUAL AIDS MUST BE SECURED IN PLACE TO PREVENT DAMAGE OR DISPLACEMENT BY PROP WASH, JET BLAST, WING VORTICES, OR OTHER WIND CURRENTS.

B. MARKINGS - ALL TEMPORARY OR PERMANENT RUNWAY AND TAXIWAY VISUAL AIDS SHALL CONFORM TO THE REQUIREMENTS OF THE MOST RECENT EDITION OF FAA AC 150/5340-1M (WWW.FAA.GOV). MARKINGS FOR THIS PROJECT INCLUDE THE FOLLOWING: TAXIWAY CENTERLINE MARKINGS, TAXIWAY EDGE MARKINGS, AND TIE-DOWN MARKINGS.

· TEMPORARILY CLOSED TAXIWAYS - THE CONTRACTOR SHALL BE RESPONSIBLE FOR FURNISHING, INSTALLING, AND MAINTAINING TAXIWAY CLOSURE MARKERS AT THE ENTRANCE TO THE CLOSED TAXIWAY FROM THE ADJACENT RUNWAY. THE TAXIWAY CLOSURE MARKERS SHALL BE INSTALLED INSIDE THE RUNWAY SAFETY AREA. THE CONTRACTOR SHALL ALSO FURNISH AND INSTALL LOW PROFILE BARRICADES AT THE ENTRANCE TO THE CLOSED TAXIWAY FROM AN ADJACENT TAXIWAY. BARRICADES SHALL BE INSTALLED OUTSIDE ALL ACTIVE TAXIWAY SAFETY AREAS. SEE DETAILS ON CONSTRUCTION SAFETY DRAWINGS FOR CLOSED TAXIWAY MARKER AND LOW-PROFILE AIRCRAFT BARRICADE DETAILS.

C. LIGHTING AND VISUAL NAVAIDS - ALL TEMPORARY LIGHTING FOR RUNWAY AND TAXIWAY SYSTEMS SHALL CONFORM TO THE REQUIREMENTS OF THE

MOST RECENT EDITION OF FAA AC 150/5340-30 AND 150/5345-50 (www.faa.gov). THE CONTRACTOR SHALL BE RESPONSIBLE FOR DISCONNECTING ISOLATION TRANSFORMERS ASSOCIATED WITH ANY RUNWAY OR TAXIWAY LIGHT FIXTURES THAT ARE BEING DISCONNECTED. IF APPLICABLE, ALL CONSTRUCTION, ALTERATION, OR REMOVAL OF FAA OWNED EQUIPMENT SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS SET FORTH IN THE APPROVED FAA REIMBURSABLE AGREEMENT. NO WORK SHALL BE COMPLETED ON FAA OWNED EQUIPMENT PRIOR TO COMPLETION OF THE FAA REIMBURSABLE AGREEMENT

D. SIGNS - THE CONTRACTOR SHALL INSTALL ALL SIGNS IN ACCORDANCE WITH THE MOST RECENT EDITION OF FAA AC 150/5345-44 AND 150/5340-18. ANY SIGN THAT IS NOT PERFORMING ITS NORMAL FUNCTION MUST BE COVERED OR REMOVED TO PREVENT MISLEADING PILOTS.

E. CONTRACTOR SHALL MAINTAIN THE LIGHTED BARRICADES, CHEVRONS, OUTBOARD MARKERS, AND LIGHTING IN AN OPERABLE CONDITION FOR THE DURATION OF THE PHASES REQUIRED. CONTRACTOR TO SERVICE BARRICADES DAILY.

MARKING AND SIGNS FOR ACCESS ROUTES

The following note was added to the plans to identify the responsibilities of the contractor for marking access routes.

THE CONTRACTOR SHALL BE RESPONSIBLE FOR SUPPLYING AND INSTALLING ALL NECESSARY MARKINGS AND SIGNAGE FOR ALL ACCESS ROUTES TO AND FROM THE SITE TO BE USED BY CONTRACTOR PERSONNEL, SUBCONTRACTOR PERSONNEL, OR DELIVERY OPERATIONS. ALL SIGNAGE IN THE AIR OPERATIONS AREA SHALL BE FRANGIBLY MOUNTED.

HAZARD MARKING, LIGHTING AND SIGNAGE

The following notes were added to the plans regarding hazard marking.

A. PURPOSE - HAZARD MARKING AND LIGHTING PREVENTS PILOTS FROM ENTERING AREAS CLOSED TO AIRCRAFT AND PREVENTS CONTRACTOR PERSONNEL FROM ENTERING AREAS OPEN TO AIRCRAFT.

B. EQUIPMENT - THE CONTRACTOR SHALL FURNISH, INSTALL, AND MAINTAIN LOW-PROFILE BARRICADES IN HAZARDOUS AREAS INSIDE MOVEMENT AREAS. BARRICADES SHALL RESTRICT ACCESS AND MAKE HAZARDS OBVIOUS TO AIRCRAFT, PERSONNEL, AND VEHICLES. DURING PERIODS OF LOW VISIBILITY AND AT NIGHT, BARRICADES SHALL BE EQUIPPED WITH RED FLASHING OR STEADY BURNING LIGHTS. THE SPACING OF BARRICADES SHALL BE SUCH THAT A BREACH IS PHYSICALLY PREVENTED BARRING A DELIBERATE ACT. IF BARRICADES ARE INTENDED TO PREVENT PEDESTRIANS, THEN THEY SHALL BE LINKED. SEE DETAILS ON CONSTRUCTION SAFETY DRAWINGS FOR LOW-PROFILE AIRCRAFT BARRICADE DETAIL.

PROTECTION OF SAFETY AREAS, OBJECT FREE AREAS, OBJECT FREE ZONES, AND APPROACH/DEPARTURE SURFACES.

The following notes were added to the plans regarding the protections of sensitive areas on the airfield.

A. RUNWAY SAFETY AREAS (RSA) - NO WORK SHALL BE PERMITTED WITHIN AN ACTIVE RUNWAY SAFETY AREA. IF REQUIRED, ADJUSTMENTS TO THE RSA DIMENSIONS THROUGH RESTRICTED OPERATIONS SHALL BE COORDINATED WITH THE FAA AIRPORTS REGIONAL OR

DISTRICT OFFICE PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL ENSURE ADEQUATE DISTANCE PROTECTION FOR BLAST PROJECTION, AS NEEDED. ALL OPEN TRENCHES OR EXCAVATIONS WITHIN THE LIMITS OF THE RSA SHALL BE BACK FILLED OR COVERED PRIOR TO OPENING THE RUNWAY TO OPERATIONS. IN ADDITION, EROSION CONTROL MEASURES SHALL BE PROVIDED IN THE RSA TO PREVENT RUTS, HUMPS, OR DEPRESSIONS INSIDE THE LIMITS OF THE RSA.

B. RUNWAY OBJECT FREE AREAS (ROFA) - NO MATERIAL SHALL BE STOCKPILED INSIDE THE LIMITS OF THE ACTIVE ROFA UNLESS APPROVED BY AIR SPACING THROUGH THE APPROPRIATE FAA AIRPORTS REGIONAL OR DISTRICT OFFICE.

C. TAXIWAY SAFETY AREAS (TSA) - NO WORK SHALL BE PERMITTED WITHIN AN ACTIVE TSA. IF REQUIRED, ADJUSTMENTS TO THE TAXIWAY TSA DIMENSIONS THROUGH RESTRICTED OPERATIONS SHALL BE COORDINATED WITH THE FAA AIRPORTS REGIONAL OR DISTRICT OFFICE PRIOR TO CONSTRUCTION. ALL OPEN TRENCHES OR EXCAVATIONS WITHIN THE LIMITS OF THE TSA SHALL BE BACK FILLED OR COVERED PRIOR TO OPENING THE TAXIWAY TO OPERATIONS. IN ADDITION, EROSION CONTROL MEASURES SHALL BE PROVIDED IN THE TSA TO PREVENT RUTS, HUMPS, OR DEPRESSIONS INSIDE THE LIMITS OF THE TSA.

D. TAXIWAY OBJECT FREE AREAS (TOFA) - NO CONSTRUCTION SHALL BE PERMITTED INSIDE AN ACTIVE TOFA UNLESS THE TAXIWAY HAS BEEN RESTRICTED TO OPERATIONS REQUIRING A TOFA EQUAL TO THAT OF THE TOFA AVAILABLE. IF REQUIRED, CONSTRUCTION MAY BE PERMITTED INSIDE THE TOFA IF THE TAXIWAY CENTERLINE MARKINGS ARE OFFSET WITH CENTERLINE REFLECTORS OR LIGHTING, OR APPROPRIATE NOTAMS ARE ISSUED. CONSTRUCTION MAY ALSO BE PERMITTED INSIDE THE TOFA IF A FIVE FOOT WING TIP CLEARANCE IS MAINTAINED FOR ALL CONSTRUCTION EQUIPMENT AND VEHICLES. IN THIS SCENARIO, FLAGGERS AND WING WALKERS MUST BE USED TO DIRECT TRAFFIC THROUGH THE CONSTRUCTION SITE.

E. OBSTACLE FREE ZONE (OFZ) - NO PERSONNEL, MATERIAL, OR EQUIPMENT SHALL PENETRATE THE OFZ WHILE THE RUNWAY IS OPEN TO OPERATIONS. THE DIMENSIONS OF THE OFZ ARE AS DEFINED IN FAA AC 150/5300-13 (www.faa.gov).

F. APPROACH/DEPARTURE SURFACES - ALL CONTRACTOR PERSONNEL, MATERIALS, AND EQUIPMENT SHALL REMAIN CLEAR OF THE APPLICABLE THRESHOLD SITING SURFACES AS DEFINED IN APPENDIX 2, "RUNWAY END SITING REQUIREMENTS" OF FAA AC 150/5300-13 (www.faa.gov). CONSTRUCTION ACTIVITIES THAT REQUIRE PENETRATION INTO THE THRESHOLD SITING SURFACE SHALL BE ACCOMPLISH THROUGH DISPLACING OR PARTIALLY CLOSING THE RUNWAY. SUCH CONSTRUCTION ACTIVITIES SHALL REQUIRE COORDINATION WITH THE FAA AIRPORTS REGIONAL OR DISTRICT OFFICE.

OTHER LIMITATIONS ON CONSTRUCTION

The following notes were added to the plans for further clarification and to limit certain construction operations that do not provide a safe environment.

A. PROHIBITIONS - THE USE OF TALL EQUIPMENT (I.E. CRANES, CONCRETE PUMPS) SHALL NOT BE PERMITTED UNLESS APPROVED BY THE ENGINEER.

B. OPEN FLAME WELDING AND TORCH CUTTING OPERATIONS ARE NOT PERMITTED UNLESS ADEQUATE FIRE SAFETY PRECAUTIONS ARE PROVIDED AND THESE OPERATIONS ARE AUTHORIZED BY THE AIRPORT OPERATOR AND THE ENGINEER.

C. ELECTRICAL BLASTING CAPS SHALL NOT BE PERMITTED WITHIN 1,000-FT OF THE AIRPORT PROPERTY. FLARE POTS ARE ALSO NOT PERMITTED WITHIN THE AIR OPERATIONS AREA.

D. RESTRICTIONS - NONE NOTED

CONSTRUCTION SAFETY AND PHASING PLAN (CSPP) - PAGE 1 OF 2

1. COORDINATION

   A. CONTRACTOR PROGRESS MEETINGS - THE OWNER, ENGINEER AND CONTRACTOR WILL HOLD PROGRESS MEETINGS ON A COORDINATED SCHEDULE DURING CONSTRUCTION. OPERATIONAL SAFETY WILL BE A STANDING AGENDA ITEM IN SUCH MEETINGS.

   B. SCOPE OR SCHEDULE CHANGES - THE OWNER AND/OR ENGINEER WILL CALL SUCH COORDINATION CONFERENCES AS MAY SEEM EXPEDIENT TO THEM FOR THE PURPOSE OF ASSURING COORDINATION OF THE WORK COVERED BY THIS CONTRACT AND/OR SCOPE OR SCHEDULE CHANGES. THE CONTRACTOR SHALL ATTEND ALL SUCH CONFERENCES.

   C. FAA ATO COORDINATION - NO FAA-OWNED EQUIPMENT IS LOCATED ON SITE.

   D. THE CONTRACTOR SHALL COMPLETE THE CONTRACTOR SAFETY AND COMPLIANCE DOCUMENT. SEE SECTION SS-101 OF THE SPECIFICATIONS FOR ADDITIONAL INFORMATION.

2. PHASING

   DURING PERFORMANCE OF THIS PROJECT, THE AIRPORT RUNWAYS, TAXIWAYS, AND AIRCRAFT PARKING APRONS SHALL REMAIN IN USE BY AIRCRAFT TO THE MAXIMUM EXTENT POSSIBLE. THE PROJECT SHALL BE PHASED TO REDUCE OPERATIONAL IMPACTS AT THE AIRPORT.

   A. PHASE ELEMENTS - IF NECESSARY FOR A GIVEN PHASE, EACH PHASE OF THE CONSTRUCTION SAFETY DRAWINGS SHALL DETAIL THE AREAS CLOSED TO AIRCRAFT OPERATIONS, ESTIMATED DURATION OF CLOSURES, TAXI ROUTES, ARFF ACCESS ROUTES, CONSTRUCTION STAGING AREAS, CONSTRUCTION ACCESS AND HAUL ROUTES, NAVAID IMPACTS, LIGHTING AND MARKING CHANGES, AVAILABLE RUNWAY LENGTH, DECLARED DISTANCES, HAZARD MARKING AND LIGHTING, AND REQUIRED LEAD TIME FOR NOTAMS.

   B. CONSTRUCTION SAFETY DRAWINGS - SEE SHEET G-203 THROUGH G-207 FOR CONSTRUCTION SAFETY DRAWINGS.

3. AREAS OF OPERATIONS AFFECTED BY CONSTRUCTION ACTIVITY

   A. IDENTIFICATION OF AFFECTED AREAS - SEE "AIRFIELD AREAS OF OPERATION AFFECTED BY CONSTRUCTION" TABLE AND CONSTRUCTION SAFETY DRAWINGS FOR AIRFIELD AREAS OF OPERATIONS AFFECTED BY CONSTRUCTION.

   B. MITIGATION EFFORTS - SEE TABLE ON PAGE 2 OF THE CSPP AND CONSTRUCTION SAFETY DRAWINGS FOR MITIGATION EFFORTS OF OPERATIONS AFFECTED BY CONSTRUCTION.

4. PROTECTION OF NAVIGATION AIDS (NAVAIDS)

   PLANNED CONSTRUCTION ACTIVITIES WILL HAVE NO NEGATIVE IMPACTS ON THE FUNCTIONALITY AND SERVICEABILITY OF THE NAVAIDS.

5. CONTRACTOR ACCESS

   A. LOCATION OF STOCKPILED MATERIALS - ALL MATERIAL DELIVERIES SHALL BE RECEIVED IN THE STAGING AREA RESERVED BY THE CONTRACTOR. NO DELIVERY TRUCKS WILL BE ALLOWED ACCESS TO A SECURED AREA OF THE AIRPORT BEYOND THIS STAGING AREA. STOCKPILED MATERIALS AND EQUIPMENT ARE NOT PERMITTED WITHIN THE ACTIVE RUNWAY SAFETY AREA AND OBSTACLE FREE ZONE. NO STOCKPILE SHALL BE GREATER THAN 15-FT IN HEIGHT.

   B. VEHICLE AND PEDESTRIAN OPERATIONS - SEE THE CONSTRUCTION SAFETY DRAWINGS FOR CONSTRUCTION SITE PARKING, EQUIPMENT STORAGE AREAS, AND ACCESS AND HAUL ROUTES. VEHICULAR TRAFFIC SHALL ALWAYS YIELD TO AIRCRAFT TRAFFIC.

      WHEN ANY VEHICLE, OTHER THAN ONE THAT HAS PRIOR APPROVAL FROM THE AIRPORT OPERATOR, MUST TRAVEL OVER ANY PORTION OF AN AIRCRAFT MOVEMENT AREA, IT WILL BE ESCORTED AND PROPERLY IDENTIFIED. TO OPERATE IN THOSE AREAS DURING DAYLIGHT HOURS, THE VEHICLE MUST HAVE A FLAG OR BEACON ATTACHED TO IT. ANY VEHICLE OPERATING ON THE MOVEMENT AREAS DURING HOURS OF DARKNESS OR REDUCED VISIBILITY MUST BE EQUIPPED WITH A FLASHING DOME-TYPE LIGHT, THE COLOR OF WHICH IS IN ACCORDANCE WITH FAA AC 150/5210-5D (WWW.FAA.GOV).

      ALL CONSTRUCTION VEHICLES SHALL BE CLEARLY IDENTIFIED FOR CONTROL PURPOSES BY PROMINENTLY DISPLAYING THE COMPANY NAME ON EACH SIDE OF THE VEHICLE. THE IDENTIFICATION SYMBOLS SHOULD BE A MINIMUM 8-INCH BLOCK-TYPE CHARACTERS OF A CONTRASTING COLOR AND EASY TO READ. THEY MAY BE APPLIED EITHER BY USING TAPE OR A WATER-SOLUABLE PAINT TO FACILITATE REMOVAL. MAGNETIC SIGNS ARE ALSO ACCEPTABLE. IN ADDITION, VEHICLES MUST DISPLAY IDENTIFICATION MEDIA. VEHICLES REQUIRING ACCESS TO THE AOA WITHOUT PROPER IDENTIFICATION OR SAFETY EQUIPMENT SHALL BE ESCORTED BY VEHICLES WITH PROPER EQUIPMENT AND IDENTIFICATION.

      CONSTRUCTION PERSONNEL MAY OPERATE IN A MOVEMENT AREA WITHOUT TWO-WAY RADIO COMMUNICATION PROVIDED A NOTAM IS ISSUED CLOSING THE AREA AND THE AREA IS PROPERLY MARKED TO PREVENT INCURSIONS. TWO-WAY RADIO COMMUNICATIONS ARE NOT REQUIRED BETWEEN CONTRACTORS AND THE AIRPORT AERONAUTICAL ADVISORY STATIONS (UNICOM/CTAF FREQUENCY 122.8). CONTINUOUS MONITORING IS REQUIRED.

   C. CONTROL OF GATES - THE CONTRACTOR SHALL BE RESPONSIBLE FOR MAINTAINING THE SECURITY OF THE ACCESS GATES BY KEEPING THE ACCESS GATE LOCKED OR GUARDED AT ALL TIMES. SHOULD THE CONTRACTOR FAIL, AT ANY TIME, TO KEEP THE ACCESS GATE LOCKED OR GUARDED, THERE SHALL BE A FINE OF $200.00 ASSESSED TO THE CONTRACTOR, FOR EACH OCCURRENCE THAT THE CONTRACTOR FAILS TO MAINTAIN THE SECURITY OF THE ACCESS GATE. ALL FINES ASSESSED TO THE CONTRACTOR SHALL BE DEDUCTED FROM ANY MONIES DUE TO THE CONTRACTOR.

6. WILDLIFE MANAGEMENT

   IF APPLICABLE, THE CONTRACTOR SHALL REVIEW AND ADHERE TO THE CONTENTS OF THE AIRPORT OPERATOR'S WILDLIFE HAZARD MANAGEMENT PLAN. THE CONTRACTOR SHALL ALSO REVIEW AC 150/5200-33, HAZARDOUS WILDLIFE ATTRACTANTS ON OR NEAR AIRPORTS, AND CERTALERT 98-05, GRASSES ATTRACTIVE TO HAZARDOUS WILDLIFE (www.faa.gov). THE CONTRACTOR SHALL CAREFULLY CONTROL AND CONTINUOUSLY REMOVE WASTE OR LOOSE MATERIALS THAT MIGHT ATTRACT WILDLIFE. CONTRACTOR PERSONNEL MUST BE AWARE OF AND AVOID CONSTRUCTION ACTIVITIES THAT CAN CREATE WILDLIFE HAZARDS ON AIRPORTS. THE CONTRACTOR SHALL MITIGATE THE FOLLOWING ITEMS.

   A. TRASH - THE CONTRACTOR SHALL PERFORM TRASH CLEAN-UP ON A DAILY BASIS.

   B. STANDING WATER - THE CONTRACTOR SHALL PROVIDE TEMPORARY DRAINAGE DURING CONSTRUCTION TO AVOID STANDING WATER.

   C. TALL GRASS AND SEEDS - THE CONTRACTOR SHALL ADHERE TO THE REQUIREMENTS OF SECTION T-901, SEEDING OF THE CONTRACT DOCUMENTS AND SPECIFICATIONS.

   D. POORLY MAINTAINED FENCING AND GATES - THE CONTRACTOR SHALL IMMEDIATELY REPORT ANY DAMAGE TO GATES OR FENCES. THE CONTRACTOR WILL BE RESPONSIBLE FOR REPAIRS TO ANY GATES OR FENCES CAUSED BY NEGLIGENCE BY THE CONTRACTOR.

   E. DISRUPTION OF EXISTING WILDLIFE HABITAT - THE CONTRACTOR SHALL NOTIFY THE AIRPORT IMMEDIATELY OF ANY WILDLIFE SIGHTINGS.

7. FOREIGN OBJECT DEBRIS (FOD) MANAGEMENT

   THE CONTRACTOR SHALL ENSURE THAT THE PAVEMENT SURFACES ARE KEPT CLEAN FROM DIRT, MUD, AND OTHER DEBRIS FROM THE CONTRACTOR'S EQUIPMENT. FREQUENT CLEAN UP IN THE VICINITY OF CONTRACTOR'S WORK AREAS IS REQUIRED. SEE AC 150/5210-24, FOREIGN OBJECT DEBRIS (FOD) MANAGEMENT (WWW.FAA.GOV) FOR FURTHER INSTRUCTION.

8. HAZARDOUS MATERIALS (HAZMAT) MANAGEMENT

   IF ANY CONSTRUCTION VEHICLE OR EQUIPMENT IS OPERATED WITHIN AIRPORT PROPERTY, THE CONTRACTOR MUST BE ADEQUATELY PREPARED TO EXPEDITIOUSLY CONTAIN AND CLEAN-UP SPILLS RESULTING FROM FUEL OR HYDRAULIC FLUID LEAKS. SPECIAL CARE MUST ALSO BE TAKEN WHEN HANDLING OR TRANSPORTING HAZARDOUS MATERIALS ON AIRPORT PROPERTY. SEE AC 150/5320-15, MANAGEMENT OF AIRPORT INDUSTRIAL WASTE (WWW.FAA.GOV), FOR FURTHER INSTRUCTION.

9. NOTIFICATION OF CONSTRUCTION ACTIVITIES

   A. LIST OF RESPONSIBLE REPRESENTATIVES - A POINT OF CONTACT LIST WILL BE COMPLETED AS PART OF THE SAFETY PLAN COMPLIANCE DOCUMENT (SPCD) AND WILL BE DELIVERED TO ALL PARTIES PRIOR TO CONSTRUCTION.

   B. NOTICES TO AIRMEN (NOTAM) - BEFORE BEGINNING ANY CONSTRUCTION ACTIVITY, THE CONTRACTOR MUST, THROUGH THE AIRPORT OPERATOR, GIVE NOTICE USING THE NOTAM SYSTEM OF PROPOSED LOCATION, TIME, AND DATE OF COMMENCEMENT OF CONSTRUCTION. UPON COMPLETION OF WORK AND RETURN OF ALL SUCH AREAS TO STANDARD CONDITIONS, THE CONTRACTOR MUST, THROUGH THE AIRPORT OPERATOR, VERIFY THE CANCELLATION OF ALL NOTICES ISSUED VIA THE NOTAM SYSTEM.

   C. EMERGENCY NOTIFICATION PROCEDURES - IN THE EVENT OF AN EMERGENCY, THE CONTRACTOR SHALL CALL 911, THEN NOTIFY THE ENGINEER AND AIRPORT MANAGER.

   D. COORDINATION WITH ARFF PERSONNEL - NO ARFF FACILITIES LOCATED ON-SITE.

   E. NOTIFICATION TO THE FAA - THE CONTRACTOR SHALL ENSURE, THROUGH THE ENGINEER, THAT ALL CONSTRUCTION EQUIPMENT OVER 15 FT IN HEIGHT IS AIR SPACED THROUGH THE APPROPRIATE FAA REGIONAL OR DISTRICT OFFICE PRIOR TO USING SUCH EQUIPMENT ON SITE.

   F. CONTRACTOR SHALL PROVIDE CONTACT INFORMATION FOR A REPRESENTATIVE WHO CAN RESPOND IMMEDIATELY ON-SITE FOR EMERGENCY MAINTENANCE OF AIRPORT HAZARD LIGHTING AND BARRICADES. DESIGNATED PERSONNEL SHALL BE AVAILABLE 24 HOURS PER DAY EACH DAY DURING CONSTRUCTION ACTIVITIES.

10. INSPECTION REQUIREMENTS

   A. DAILY INSPECTIONS - THE CONTRACTOR SHALL PERFORM DAILY SAFETY INSPECTIONS TO VERIFY ALL CONSTRUCTION OPERATIONS ARE IN CONFORMANCE WITH THE CONSTRUCTION SAFETY AND PHASING PLAN (CSPP).

   B. FINAL INSPECTIONS - PRIOR TO OPENING ANY PORTION OF THE AIRPORT TO TRAFFIC, THE CONTRACTOR, ENGINEER, AND AIRPORT OPERATOR SHALL PERFORM A SAFETY INSPECTION OF THE AREA TO BE OPENED TO TRAFFIC TO VERIFY CONFORMANCE WITH THE CSPP AND FAA/MODOT STANDARDS.

11. UNDERGROUND UTILITIES

   UNDERGROUND UTILITIES EXIST WITHIN AND ADJACENT TO THE LIMITS OF CONSTRUCTION. AN ATTEMPT HAS BEEN MADE TO LOCATE THESE UTILITIES ON THE PLANS. HOWEVER, ALL EXISTING UTILITIES MAY NOT BE SHOWN AND THE ACTUAL LOCATIONS OF THE UTILITIES MAY VARY FROM THE LOCATIONS SHOWN. PRIOR TO BEGINNING ANY TYPE OF EXCAVATION, THE CONTRACTOR SHALL CONTACT THE UTILITIES INVOLVED AND MAKE ARRANGEMENTS FOR THE LOCATION OF THE UTILITIES ON THE GROUND. THE CONTRACTOR SHALL MAINTAIN THE UTILITY LOCATION MARKINGS UNTIL THEY ARE NO LONGER NECESSARY.

   MISSOURI STATE LAW, THE UNDERGROUND FACILITIES DAMAGE PREVENTION ACT, REQUIRES TWO WORKING DAYS ADVANCE NOTIFICATION THROUGH THE ONE-CALL SYSTEM CENTER BEFORE EXCAVATING USING MECHANIZED EQUIPMENT OR EXPLOSIVES (EXCEPT IN THE CASE OF AN EMERGENCY). THE ONE-CALL SYSTEM PHONE NUMBER IS 1-800-344-7483. THE CONTRACTOR IS ADVISED THAT THERE IS A SEVERE PENALTY FOR NOT MAKING THIS CALL. NOT ALL UTILITY COMPANIES ARE MEMBERS OF THE 811 ONE-CALL SYSTEM ; THEREFORE, THE CONTRACTOR IS ADVISED TO CONTACT ALL NON-MEMBER UTILITIES AS WELL AS THE ONE-CALL SYSTEM.

12. PENALTIES

   FAILURE OF THE CONTRACTOR (INCLUDING EMPLOYEES) OR ANY OF THEIR SUBCONTRACTORS (INCLUDING EMPLOYEES) TO COMPLY WITH ATCT INSTRUCTIONS, THE AIRPORT SAFETY PLAN, OR ANY OF THE OTHER REQUIREMENTS OF THE AIRPORT WHILE OPERATING ON AIRPORT PROPERTY, SHALL BE SUBJECT TO THE FOLLOWING:

   A. FIRST OFFENSE - THE CONTRACTOR SHALL RECEIVE A FINE OF $1,000.00, AND THE VEHICLE OPERATOR WILL RECEIVE A LOSS PF DRIVING PRIVILEGES ON THE AIRPORT. IN ADDITION, ANY FINES OR PENALTIES IMPOSED ON THE AIRPORT AS A RESULT OF THE INCIDENT WILL BE ASSESSED TO THE CONTRACTOR.

   B. SECOND OFFENSE - THE CONTRACTOR SHALL RECEIVE A FINE OF $5,000.00 TO BE DEDUCTED FROM ANY MONIES DUE THE CONTRACTOR, AND THE VEHICLE OPERATOR WILL RECEIVE A LOSS OF DRIVING PRIVILEGES ON THE AIRPORT. IN ADDITION, ANY FINE OR PENALTIES IMPOSED ON THE AIRPORT AS A RESULT OF THE INCIDENT WILL BE ASSESSED TO THE CONTRACTOR.

   C. THIRD OFFENSE - WORK WILL BE SUSPENDED. THE CONTRACTOR (INCLUDING EMPLOYEES) AND ANY OF THEIR SUBCONTRACTORS (INCLUDING EMPLOYEES) WHO WILL OPERATE GROUND VEHICLES ON THE AIRPORT SHALL SUCCESSFULLY COMPLETE, FOR A SECOND TIME, FORMALIZED AIRPORT SAFETY TRAINING, TO BE CONDUCTED BY AIRPORT STAFF. WHEN THE CONTRACTOR'S EMPLOYEES HAVE COMPLETED AIRPORT SAFETY TRAINING TO THE SATISFACTION OF THE OWNER, WORK MAY CONTINUE AT THE DISCRETION OF THE OWNER.

13. SPECIAL CONDITIONS

   NONE NOTED

14. RUNWAY AND TAXIWAY VISUAL AIDS

   A. GENERAL - ALL AIRPORT MARKINGS, LIGHTING, SIGNS, AND VISUAL NAVAIDS THAT ARE IN OPERATION MUST BE CLEAR FROM ALL OBSTRUCTIONS. ALL TEMPORARY MARKINGS, SIGNS, LIGHTS, OR OTHER VISUAL AIDS MUST BE SECURED IN PLACE TO PREVENT DAMAGE OR DISPLACEMENT BY PROP WASH, JET BLAST, WING VORTICES, OR OTHER WIND CURRENTS.

   B. MARKINGS - ALL TEMPORARY OR PERMANENT RUNWAY AND TAXIWAY VISUAL AIDS SHALL CONFORM TO THE REQUIREMENTS OF THE MOST RECENT EDITION OF FAA AC 150/5340-1M (WWW.FAA.GOV). MARKINGS FOR THIS PROJECT INCLUDE THE FOLLOWING: TAXIWAY CENTERLINE MARKINGS, TAXIWAY EDGE MARKINGS, AND TIE-DOWN MARKINGS.

      - TEMPORARILY CLOSED TAXIWAYS - THE CONTRACTOR SHALL BE RESPONSIBLE FOR FURNISHING, INSTALLING, AND MAINTAINING TAXIWAY CLOSURE MARKERS AT THE ENTRANCE TO THE CLOSED TAXIWAY FROM THE ADJACENT RUNWAY. THE TAXIWAY CLOSURE MARKERS SHALL BE INSTALLED INSIDE THE RUNWAY SAFETY AREA. THE CONTRACTOR SHALL ALSO FURNISH AND INSTALL LOW PROFILE BARRICADES AT THE ENTRANCE TO THE CLOSED TAXIWAY FROM AN ADJACENT TAXIWAY. BARRICADES SHALL BE INSTALLED OUTSIDE ALL ACTIVE TAXIWAY SAFETY AREAS. SEE DETAILS ON CONSTRUCTION SAFETY DRAWINGS FOR CLOSED TAXIWAY MARKER AND LOW-PROFILE AIRCRAFT BARRICADE DETAILS.

   C. LIGHTING AND VISUAL NAVAIDS - ALL TEMPORARY LIGHTING FOR RUNWAY AND TAXIWAY SYSTEMS SHALL CONFORM TO THE REQUIREMENTS OF THE MOST RECENT EDITION OF FAA AC 150/5340-30 AND 150/5345-50 (www.faa.gov). THE CONTRACTOR SHALL BE RESPONSIBLE FOR DISCONNECTING ISOLATION TRANSFORMERS ASSOCIATED WITH ANY RUNWAY OR TAXIWAY LIGHT FIXTURES THAT ARE BEING DISCONNECTED.

      IF APPLICABLE, ALL CONSTRUCTION, ALTERATION, OR REMOVAL OF FAA OWNED EQUIPMENT SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS SET

GARVER
© 2021 GARVER, LLC
THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGNS CONVEYED HEREIN, SHALL BE CONSIDERED INSTRUMENTS OF PROFESSIONAL SERVICE AND ARE PROPERTY OF GARVER, LLC. ANY USE, REPRODUCTION, OR DISTRIBUTION OF THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGN CONTAINED HEREIN, IS PROHIBITED UNLESS AUTHORIZED IN WRITING BY GARVER, LLC OR EXPLICITLY ALLOWED IN THE GOVERNING PROFESSIONAL SERVICES AGREEMENT FOR THIS WORK.

STATE OF MISSOURI
JASON C. FOEHNE
MEMBER
PE-2010008527
PROFESSIONAL ENGINEER
Jason C. Foehne
Jason C. Foehne

REV.	DATE	DESCRIPTION	BY
		ISSUED FOR BID	

CLINTON REGIONAL AIRPORT
CLINTON, MISSOURI

APRON DESIGN
PHASES 2 THROUGH 6

CONSTRUCTION SAFETY AND PHASING NOTES I

JOB NO.: 19A15701
DATE: FEB 2021
DESIGNED BY: JCF
DRAWN BY: JAH

BAR IS ONE INCH ON ORIGINAL DRAWING
0 1"
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY.

DRAWING NUMBER
G-201

SHEET NUMBER **4**

File: L:\2019\19A15701 - GLY Apron Phase 2 Through 6 DS\Drawings\GLY1-APN-G201-CN.dwg Last Save: 1/24/2020 7:53 PM Last saved by: AMJessop
Last plotted by: Penn, Collin M. Plot Style: AECmono.ctb Plot Scale: 1:1 Plot Date: 2/18/2021 2:36 PM Plotter used: _AutoCAD PDF (General Documentation).pc3

CONSTRUCTION SAFETY AND PHASING PLAN (CSPP) - PAGE 2 OF 2

FORTH IN THE APPROVED FAA REIMBURSABLE AGREEMENT. NO WORK SHALL BE COMPLETED ON FAA OWNED EQUIPMENT PRIOR TO COMPLETION OF THE FAA REIMBURSABLE AGREEMENT.

D. SIGNS - THE CONTRACTOR SHALL INSTALL ALL SIGNS IN ACCORDANCE WITH THE MOST RECENT EDITION OF FAA AC 150/5345-44 AND 150/5340-18. ANY SIGN THAT IS NOT PERFORMING ITS NORMAL FUNCTION MUST BE COVERED OR REMOVED TO PREVENT MISLEADING PILOTS.

E. CONTRACTOR SHALL MAINTAIN THE LIGHTED BARRICADES, CHEVRONS, OUTBOARD MARKERS, AND LIGHTING IN AN OPERABLE CONDITION FOR THE DURATION OF THE PHASES REQUIRED. CONTRACTOR TO SERVICE BARRICADES DAILY.

15. MARKING AND SIGNS FOR ACCESS ROUTES

THE CONTRACTOR SHALL BE RESPONSIBLE FOR SUPPLYING AND INSTALLING ALL NECESSARY MARKINGS AND SIGNAGE FOR ALL ACCESS ROUTES TO AND FROM THE SITE TO BE USED BY CONTRACTOR PERSONNEL, SUBCONTRACTOR PERSONNEL, OR DELIVERY OPERATIONS. ALL SIGNAGE IN THE AIR OPERATIONS AREA SHALL BE FRANGIBLY MOUNTED.

16. HAZARD MARKING AND LIGHTING

A. PURPOSE - HAZARD MARKING AND LIGHTING PREVENTS PILOTS FROM ENTERING AREAS CLOSED TO AIRCRAFT AND PREVENTS CONTRACTOR PERSONNEL FROM ENTERING AREAS OPEN TO AIRCRAFT.

B. EQUIPMENT - THE CONTRACTOR SHALL FURNISH, INSTALL, AND MAINTAIN LOW-PROFILE BARRICADES IN HAZARDOUS AREAS INSIDE MOVEMENT AREAS. BARRICADES SHALL RESTRICT ACCESS AND MAKE HAZARDS OBVIOUS TO AIRCRAFT, PERSONNEL, AND VEHICLES. DURING PERIODS OF LOW VISIBILITY AND AT NIGHT, BARRICADES SHALL BE EQUIPPED WITH RED FLASHING OR STEADY BURNING LIGHTS. THE SPACING OF BARRICADES SHALL BE SUCH THAT A BREACH IS PHYSICALLY PREVENTED BARRING A DELIBERATE ACT. IF BARRICADES ARE INTENDED TO PREVENT PEDESTRIANS, THEN THEY SHALL BE LINKED. SEE DETAILS ON CONSTRUCTION SAFETY DRAWINGS FOR LOW-PROFILE AIRCRAFT BARRICADE DETAIL.

17. WORK ZONE LIGHTING FOR NIGHTTIME CONSTRUCTION

ALL WORK CONDUCTED AT NIGHT SHALL BE ACCOMPANIED BY ADEQUATE LIGHT FACILITIES TO COMPLETE THE WORK. ALL LIGHT FACILITIES SHALL BE AIMED OR SHIELDED AS NECESSARY TO AVOID IMPACTING AIRCRAFT OR ATCT OPERATIONS. THE CONTRACTOR SHALL BE REQUIRED TO SUBMIT A LIGHTING PLAN SHOWING THE LOCATION AND AIMING DIRECTION OF ALL LIGHT FACILITIES PRIOR TO THE COMPLETION OF ANY NIGHT WORK.

18. PROTECTION OF SAFETY AREAS, OBJECT FREE AREAS, OBJECT FREE ZONES, AND APPROACH/DEPARTURE SURFACES.

A. RUNWAY SAFETY AREAS (RSA) - NO WORK SHALL BE PERMITTED WITHIN AN ACTIVE RUNWAY SAFETY AREA. IF REQUIRED, ADJUSTMENTS TO THE RSA DIMENSIONS THROUGH RESTRICTED OPERATIONS SHALL BE COORDINATED WITH THE FAA AIRPORTS REGIONAL OR DISTRICT OFFICE PRIOR TO CONSTRUCTION. THE CONTRACTOR SHALL ENSURE ADEQUATE DISTANCE PROTECTION FOR BLAST PROJECTION, AS NEEDED. ALL OPEN TRENCHES OR EXCAVATIONS WITHIN THE LIMITS OF THE RSA SHALL BE BACK FILLED OR COVERED PRIOR TO OPENING THE RUNWAY TO OPERATIONS. IN ADDITION, EROSION CONTROL MEASURES SHALL BE PROVIDED IN THE RSA TO PREVENT RUTS, HUMPS, OR DEPRESSIONS INSIDE THE LIMITS OF THE RSA.

B. RUNWAY OBJECT FREE AREAS (ROFA) - NO MATERIAL SHALL BE STOCKPILED INSIDE THE LIMITS OF THE ACTIVE ROFA UNLESS APPROVED BY AIR SPACING THROUGH THE APPROPRIATE FAA AIRPORTS REGIONAL OR DISTRICT OFFICE.

C. TAXIWAY SAFETY AREAS (TSA) - NO WORK SHALL BE PERMITTED WITHIN AN ACTIVE TSA. IF REQUIRED, ADJUSTMENTS TO THE TAXIWAY TSA DIMENSIONS THROUGH RESTRICTED OPERATIONS SHALL BE COORDINATED WITH THE FAA AIRPORTS REGIONAL OR DISTRICT OFFICE PRIOR TO CONSTRUCTION. ALL OPEN TRENCHES OR EXCAVATIONS WITHIN THE LIMITS OF THE TSA SHALL BE BACK FILLED OR COVERED PRIOR TO OPENING THE TAXIWAY TO OPERATIONS. IN ADDITION, EROSION CONTROL MEASURES SHALL BE PROVIDED IN THE TSA TO PREVENT RUTS, HUMPS, OR DEPRESSIONS INSIDE THE LIMITS OF THE TSA.

D. TAXIWAY OBJECT FREE AREAS (TOFA) - NO CONSTRUCTION SHALL BE PERMITTED INSIDE AN ACTIVE TOFA UNLESS THE TAXIWAY HAS BEEN RESTRICTED TO OPERATIONS REQUIRING A TOFA EQUAL TO THAT OF THE TOFA AVAILABLE. IF REQUIRED, CONSTRUCTION MAY BE PERMITTED INSIDE THE TOFA IF THE TAXIWAY CENTERLINE MARKINGS ARE OFFSET WITH CENTERLINE REFLECTORS OR LIGHTING, OR APPROPRIATE NOTAMS ARE ISSUED. CONSTRUCTION MAY ALSO BE PERMITTED INSIDE THE TOFA IF A FIVE FOOT WING TIP CLEARANCE IS MAINTAINED FOR ALL CONSTRUCTION EQUIPMENT AND VEHICLES. IN THIS SCENARIO, FLAGGERS AND WING WALKERS MUST BE USED TO DIRECT TRAFFIC THROUGH THE CONSTRUCTION SITE.

E. OBSTACLE FREE ZONE (OFZ) - NO PERSONNEL, MATERIAL, OR EQUIPMENT SHALL PENETRATE THE OFZ WHILE THE RUNWAY IS OPEN TO OPERATIONS. THE DIMENSIONS OF THE OFZ ARE AS DEFINED IN FAA AC 150/5300-13 (www.faa.gov).

F. APPROACH/DEPARTURE SURFACES - ALL CONTRACTOR PERSONNEL, MATERIALS, AND EQUIPMENT SHALL REMAIN CLEAR OF THE APPLICABLE THRESHOLD SITING SURFACES AS DEFINED IN APPENDIX 2, "RUNWAY END SITING REQUIREMENTS" OF FAA AC 150/5300-13 (www.faa.gov). CONSTRUCTION ACTIVITIES THAT REQUIRE PENETRATION INTO THE THRESHOLD SITING SURFACE SHALL BE ACCOMPLISH THROUGH DISPLACING OR PARTIALLY CLOSING THE RUNWAY. SUCH CONSTRUCTION ACTIVITIES SHALL REQUIRE COORDINATION WITH THE FAA AIRPORTS REGIONAL OR DISTRICT OFFICE.

19. OTHER LIMITATIONS ON CONSTRUCTION

A. PROHIBITIONS - THE USE OF TALL EQUIPMENT (I.E. CRANES, CONCRETE PUMPS) SHALL NOT BE PERMITTED UNLESS APPROVED BY THE ENGINEER.

B. OPEN FLAME WELDING AND TORCH CUTTING OPERATIONS ARE NOT PERMITTED UNLESS ADEQUATE FIRE SAFETY PRECAUTIONS ARE PROVIDED AND THESE OPERATIONS ARE AUTHORIZED BY THE AIRPORT OPERATOR AND THE ENGINEER.

C. ELECTRICAL BLASTING CAPS SHALL NOT BE PERMITTED WITHIN 1,000-FT OF THE AIRPORT PROPERTY. FLARE POTS ARE ALSO NOT PERMITTED WITHIN THE AIR OPERATIONS AREA.

D. RESTRICTIONS - NONE NOTED

AIRFIELD AREAS AFFECTED BY CONSTRUCTION 18-36

OPERATIONAL REQUIREMENTS	EXISTING (NORMAL)	PHASE 2	PHASE 3	PHASE 4*	PHASE 5*	PHASE 6*
RUNWAY 18-36 ARC	B-II	SAME	SAME	SAME	SAME	SAME
RUNWAY 18 APPROACH MINIMUMS	1 MILE	SAME	SAME	SAME	SAME	SAME
RUNWAY 36 APPROACH MINIMUMS	1 MILE	SAME	SAME	SAME	SAME	SAME
RUNWAY 18 DECLARED DISTANCES	TORA: 5,000'	SAME	SAME	SAME	SAME	SAME
	TODA: 5,000'	SAME	SAME	SAME	SAME	SAME
	ASDA: 5,000'	SAME	SAME	SAME	SAME	SAME
	LDA: 5,000'	SAME	SAME	SAME	SAME	SAME
RUNWAY 36 DECLARED DISTANCES	TORA: 5,000'	SAME	SAME	SAME	SAME	SAME
	TODA: 5,000'	SAME	SAME	SAME	SAME	SAME
	ASDA: 5,000'	SAME	SAME	SAME	SAME	SAME
	LDA: 5,000'	SAME	SAME	SAME	SAME	SAME
RUNWAY 18 APPROACH PROCEDURES	GPS, LPV	SAME	SAME	SAME	SAME	SAME
RUNWAY 36 APPROACH PROCEDURES	GPS, LPV	SAME	SAME	SAME	SAME	SAME
RUNWAY 18 NAVAIDS	REILs, PAPIs, MIRLs	SAME	SAME	SAME	SAME	SAME
RUNWAY 36 NAVAIDS	REILs, PAPIs, MIRLs	SAME	SAME	SAME	SAME	SAME
TAXIWAY A ADG	TDG 2	SAME	SAME	SAME	SAME	SAME

*PHASE 4, 5, AND 6 TO BE COMPLETED IN FUTURE PROJECTS.

AIRFIELD AREAS AFFECTED BY CONSTRUCTION 4-22

OPERATIONAL REQUIREMENTS	EXISTING (NORMAL)	PHASE 2	PHASE 3	PHASE 4*	PHASE 5*	PHASE 6*
RUNWAY 4-22 ARC	B-I	SAME	SAME	SAME	SAME	SAME
RUNWAY 4 APPROACH MINIMUMS	1 MILE	SAME	SAME	SAME	SAME	SAME
RUNWAY 22 APPROACH MINIMUMS	1 MILE	SAME	SAME	SAME	SAME	SAME
RUNWAY 4 DECLARED DISTANCES	TORA: 4,001'	SAME	SAME	SAME	SAME	SAME
	TODA: 4,001'	SAME	SAME	SAME	SAME	SAME
	ASDA: 4,001'	SAME	SAME	SAME	SAME	SAME
	LDA: 4,001'	SAME	SAME	SAME	SAME	SAME
RUNWAY 22 DECLARED DISTANCES	TORA: 4,001'	SAME	SAME	SAME	SAME	SAME
	TODA: 4,001'	SAME	SAME	SAME	SAME	SAME
	ASDA: 4,001'	SAME	SAME	SAME	SAME	SAME
	LDA: 4,001'	SAME	SAME	SAME	SAME	SAME
RUNWAY 4 APPROACH PROCEDURES	NDB, RNAV	SAME	SAME	SAME	SAME	SAME
RUNWAY 22 APPROACH PROCEDURES	NDB, RNAV	SAME	SAME	SAME	SAME	SAME
RUNWAY 4 NAVAIDS	REILs, PAPIs, MIRLs	SAME	SAME	SAME	SAME	SAME
RUNWAY 22 NAVAIDS	REILs, PAPIs, MIRLs	SAME	SAME	SAME	SAME	SAME
TAXIWAY A ADG	TDG 2	SAME	SAME	SAME	SAME	SAME

*PHASE 4, 5, AND 6 TO BE COMPLETED IN FUTURE PROJECTS.

RUNWAY DATA

RUNWAY END NUMBER	AIRPLANE DESIGN GROUP	AIRCRAFT APPROACH CATEGORY	MINIMUM SAFETY AREA PRIOR TO THE THRESHOLD	MINIMUM UNOBSTRUCTED APPROACH SLOPE	RSA WIDTH DIVIDED BY 2
RUNWAY 4	I	B	240-FT	20:1	60-FT
RUNWAY 22	I	B	240-FT	20:1	60-FT
RUNWAY 18	II	B	300-FT	34:1	75-FT
RUNWAY 36	II	B	300-FT	34:1	75-FT

GARVER
© 2021 GARVER, LLC
THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGNS CONVEYED HEREIN, SHALL BE CONSIDERED INSTRUMENTS OF PROFESSIONAL SERVICE AND ARE PROPERTY OF GARVER, LLC. ANY USE, REPRODUCTION, OR DISTRIBUTION OF THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGN CONTAINED HEREIN, IS PROHIBITED UNLESS AUTHORIZED IN WRITING BY GARVER, LLC OR EXPLICITLY ALLOWED IN THE GOVERNING PROFESSIONAL SERVICES AGREEMENT FOR THIS WORK.

STATE OF MISSOURI
JASON C. FOEHNE
NUMBER PE-2010008511
PROFESSIONAL ENGINEER
3/05/21

REV.	DATE	DESCRIPTION	BY
		ISSUED FOR BID	

CLINTON REGIONAL AIRPORT
CLINTON, MISSOURI

APRON DESIGN
PHASES 2 THROUGH 6

CONSTRUCTION SAFETY AND PHASING NOTES II


JOB NO.: 19A15701
DATE: FEB 2021
DESIGNED BY: JCF
DRAWN BY: JAH

BAR IS ONE INCH ON ORIGINAL DRAWING
0 1"
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY.

DRAWING NUMBER
G-202

SHEET NUMBER **5**


File: L:\2019\19A15701 -GLY Apron Phase 2 Through 6 DSI\Drawings\GLY1-APN-G201-CN.dwg Last Save: 11/24/2020 7:53 PM Last saved by: AMJesscp
Last plotted by: Petri, Collin M. Plot Style: AECmono.ctb Plot Scale: 1:1 Plot Date: 2/18/2021 2:36 PM Plotter used: _AutoCAD PDF (General Documentation).pc3

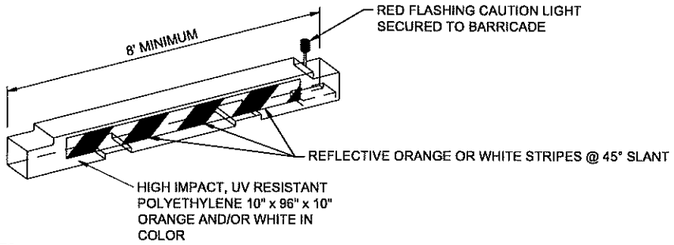

NOTES:

1. CONTRACTOR SHALL FURNISH AND MAINTAIN REFLECTIVE ORANGE AND WHITE LOW LEVEL BARRICADES. CONTRACTOR SHALL INSTALL BARRICADES WHERE INDICATED ON THE PHASING PLANS AND/OR DIRECTED BY THE ENGINEER. SPACING BETWEEN BARRICADES SHALL NOT EXCEED 4 FEET EXCEPT WHERE CONSTRUCTION VEHICLES REQUIRE ACCESS, IN WHICH CASE THE SPACING SHALL BE 10 FEET
2. CONTRACTOR MUST FURNISH AND ASSEMBLE OMNI-DIRECTIONAL RED WARNING LIGHTS ONTO THE BARRICADES AND THEN BE RESPONSIBLE FOR MAINTENANCE OF THESE LIGHTS FOR THE DURATION OF THE PROJECT INCLUDING, BUT NOT LIMITED TO, BATTERY REPLACEMENT. THE LIGHT SHALL MAINTAIN SUCH INTENSITY SO AS TO BE READILY IDENTIFIED FROM DISTANCES OF AT LEAST 200 FEET DURING DARKNESS HOURS. LIGHTS ARE TO BE RED IN COLOR AND FLASHING DURING HOURS OF DARKNESS AND REDUCED VISIBILITY.
3. BARRICADES SHALL MEET THE REQUIREMENTS OF THE CURRENT FAA ADVISORY CIRCULAR 150/5370-2 AND BE APPROVED BY THE ENGINEER.
4. CONTRACTOR SHALL WEIGHT BARRICADE TO PREVENT DISPLACEMENT. THE METHOD SHALL BE APPROVED BY THE ENGINEER.
5. BARRICADES SHALL BE LOCATED AS DEFINED IN THE CONSTRUCTION SAFETY AND PHASING PLAN (CSPP), SEE SHEETS G-204 THROUGH G-207.
6. BARRICADE SPACING SHALL BE CONTINUOUS EXCEPT AT VEHICLE ACCESS POINTS (10-FOOT MAXIMUM SPACING).
7. 7. BARRICADES SHALL REMAIN CLEAN AT ALL TIMES AND REFLECTIVE STRIPES MUST REMAIN FULLY VISIBLE.

1 / G-203 — LOW-PROFILE AIRCRAFT BARRICADE
SCALE: NONE

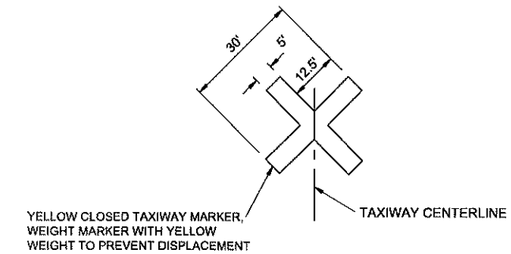

2 / G-203 — CLOSED TAXIWAY MARKER
SCALE: NONE

GARVER
© 2021 GARVER, LLC
THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGNS CONVEYED HEREIN, SHALL BE CONSIDERED INSTRUMENTS OF PROFESSIONAL SERVICE AND ARE PROPERTY OF GARVER, LLC. ANY USE, REPRODUCTION, OR DISTRIBUTION OF THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGN CONTAINED HEREIN, IS PROHIBITED UNLESS AUTHORIZED IN WRITING BY GARVER, LLC OR EXPLICITLY ALLOWED IN THE GOVERNING PROFESSIONAL SERVICES AGREEMENT FOR THIS WORK.

STATE OF MISSOURI
JASON C. FUSINI
NUMBER PE-2010008951
PROFESSIONAL ENGINEER
3/25/21

REV.	DATE	DESCRIPTION	BY
		ISSUED FOR BID	

CLINTON REGIONAL AIRPORT
CLINTON, MISSOURI

APRON DESIGN
PHASES 2 THROUGH 6

CONSTRUCTION SAFETY DETAILS


JOB NO.: 19A15701
DATE: FEB 2021
DESIGNED BY: JCF
DRAWN BY: JAH

BAR IS ONE INCH ON ORIGINAL DRAWING
0 1"
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY.

DRAWING NUMBER
G-203

SHEET NUMBER **6**

File: L:\2019\19A15701 -GLY Apron Phase 2 Through 6 DSD\drawings\GLY1-APN-G203-CD.dwg Last Save: 11/24/2020 7:15 PM Last saved by: AMJessop
Last plotted by: Pehl, Collin M. Plot Style: AECmono.ctb Plot Scale: 1:1 Plot Date: 2/18/2021 2:36 PM Plotter used: _AutoCAD PDF (General Documentation).pc3

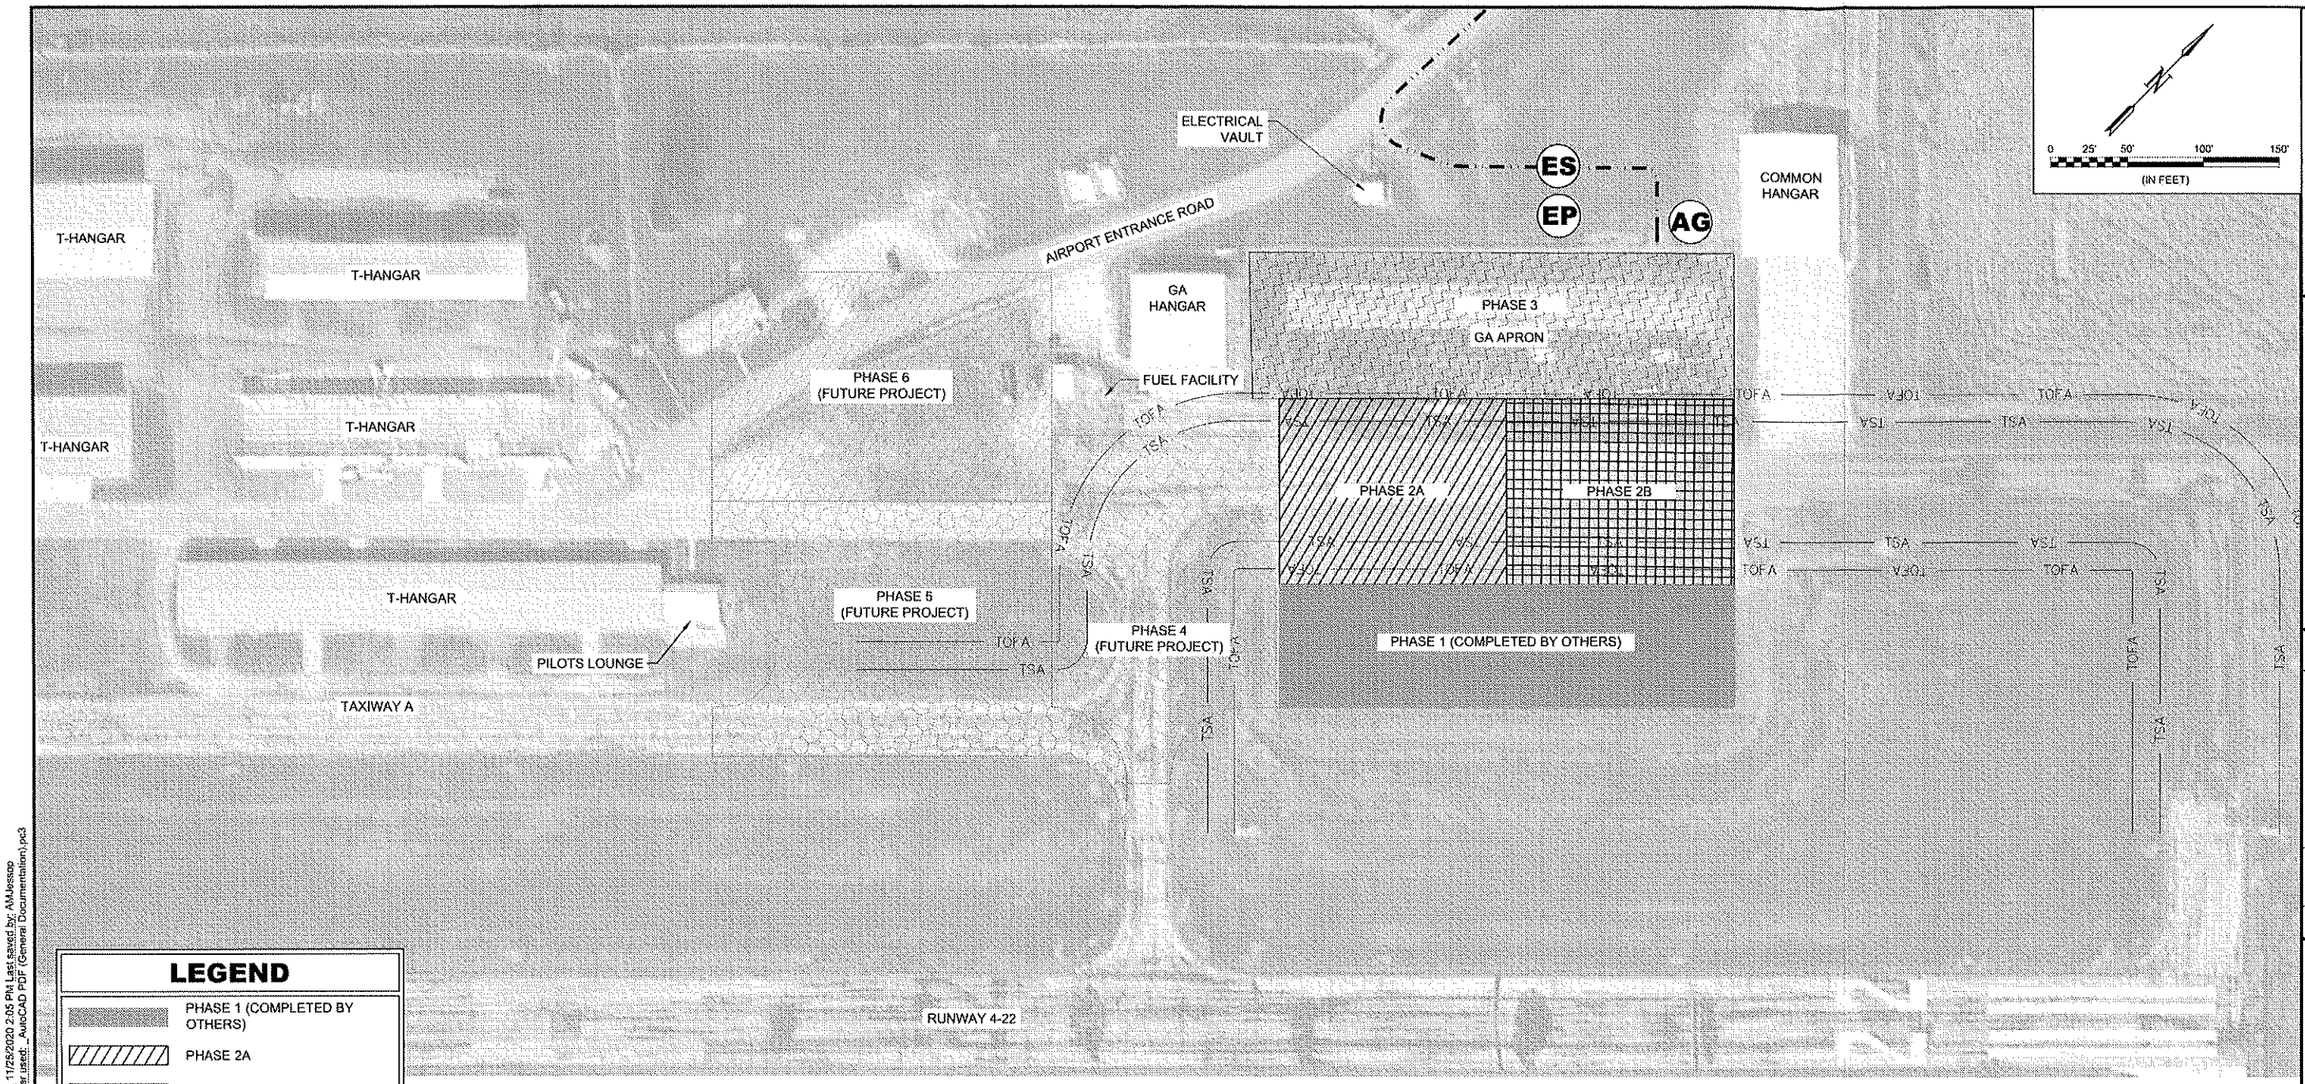

LEGEND

- PHASE 1 (COMPLETED BY OTHERS)
- PHASE 2A
- PHASE 2B
- PHASE 3
- PHASE 4 (FUTURE PROJECT)
- PHASE 5 (FUTURE PROJECT)
- PHASE 6 (FUTURE PROJECT)
- CONTRACTOR ACCESS ROUTE
- AIRCRAFT ROUTE
- ES — EQUIPMENT STAGING AREA
- EP — EMPLOYEE PARKING
- AG — ACCESS GATE
- TSA — TAXIWAY SAFETY AREA
- TOFA — TAXIWAY OBJECT FREE AREA

CONTRACT TIME

PHASE	ITEMS OF WORK	CALENDAR DAYS	AVAILABILITY
PHASE 2A (35 DAYS)	PLACE BARRICADES AND CLOSURE MARKERS. INSTALL EROSION CONTROL MEASURES. PERFORM DEMOLITION AND CLEARING AND GRUBBING. PERFORM SUBGRADE PREPARATION. INSTALL UNDERDRAIN AND OTHER DRAINAGE STRUCTURES AND PERFORM GRADING. INSTALL TIE-DOWN ANCHORS. CONSTRUCT PROPOSED CONCRETE PAVEMENT SECTION. REMOVE BARRICADES AND CLOSURE MARKERS. WORK ADJACENT TO THE COMMON HANGAR SHALL BE PERFORMED WITHIN A FOUR (4) CONSECUTIVE DAY EXPEDITED PHASE, WHICH MAY OCCUR ANYTIME DURING PHASE 2A. THIS WORK INCLUDES DRAINAGE PIPE DEMOLITION, INSTALLATION AND PAVEMENT PATCH ON TAXIWAY A. THE CONTRACTOR SHALL NOTIFY THE ENGINEER AND AIRPORT 72 HOURS BEFORE WORK MAY COMMENCE.		NO THRU-TAXING ON TWY A BETWEEN GA AND COMMON HANGARS
PHASE 2B (25 DAYS)	PLACE BARRICADES AND CLOSURE MARKERS. PERFORM DEMOLITION. PERFORM SUBGRADE PREPARATION. CONSTRUCT PROPOSED CONCRETE PAVEMENT SECTION AND TRANSITION. PERFORM GRADING. INSTALL PROPOSED PAVEMENT MARKING AND TIE-DOWN ANCHORS IN PREVIOUSLY CONSTRUCTED CONCRETE IN PHASE 1. REMOVE BARRICADES AND CLOSURE MARKERS.		NO THRU-TAXING ON TWY A BETWEEN GA AND COMMON HANGARS
PHASE 3* (30 DAYS)	PLACE BARRICADES AND CLOSURE MARKERS. INSTALL EROSION CONTROL MEASURES. PERFORM DEMOLITION AND CLEARING AND GRUBBING. PERFORM SUBGRADE PREPARATION. CONSTRUCT PROPOSED CONCRETE PAVEMENT SECTION. INSTALL PROPOSED PAVEMENT MARKING AND TIE-DOWN ANCHORS. REMOVE BARRICADES AND CLOSURE MARKERS.		NO PARKING ON GA APRON NORTH OF TWY A

0 20 40 60 80 100

*IF ADDITIVE ALTERNATE IS AWARDED, PHASE 3 SHALL BE CONSTRUCTED.

NOTES:

1. CONTRACTOR SHALL MAINTAIN ACCESS TO FUEL FACILITY THROUGHOUT CONSTRUCTION.
2. CONTRACTOR SHALL KEEP ALL ACTIVE TAXIWAYS CLEAR OF FOD AT ALL TIMES.

GARVER
© 2021 GARVER, LLC
THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGNS CONVEYED HEREIN, SHALL BE CONSIDERED INSTRUMENTS OF PROFESSIONAL SERVICE, AND ARE PROPERTY OF GARVER, LLC. ANY USE, REPRODUCTION, OR DISTRIBUTION OF THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGN CONTAINED HEREIN, IS PROHIBITED UNLESS AUTHORIZED IN WRITING BY GARVER, LLC OR EXPLICITLY ALLOWED IN THE GOVERNING PROFESSIONAL SERVICES AGREEMENT FOR THIS WORK.

STATE OF MISSOURI
JASON C. FURHME
NUMBER PE-2010008917
PROFESSIONAL ENGINEER

REV.	DATE	DESCRIPTION	BY
		ISSUED FOR BID	

CLINTON REGIONAL AIRPORT
CLINTON, MISSOURI

APRON DESIGN
PHASES 2 THROUGH 6

CONSTRUCTION SAFETY AND PHASING PLAN - OVERALL


JOB NO.: 19A15701
DATE: FEB 2021
DESIGNED BY: JCF
DRAWN BY: JAH

BAR IS ONE INCH ON ORIGINAL DRAWING
0 1"
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY.

DRAWING NUMBER
G-204

SHEET NUMBER 7

File: L:\2019\19A15701 - GLY Apron Phase 2 Through 6 DSI\Drawings\GLY-APN-G204-CS.dwg Last Save: 11/25/2020 2:05 PM Last saved by: AMJessop
Last plotted by: Petri, Collin M. Plot Style: AECmono.ctb Plot Scale: 1:1 Plot Date: 2/18/2021 2:37 PM Plotter used: _AutoCAD PDF (General Documentation).pc3

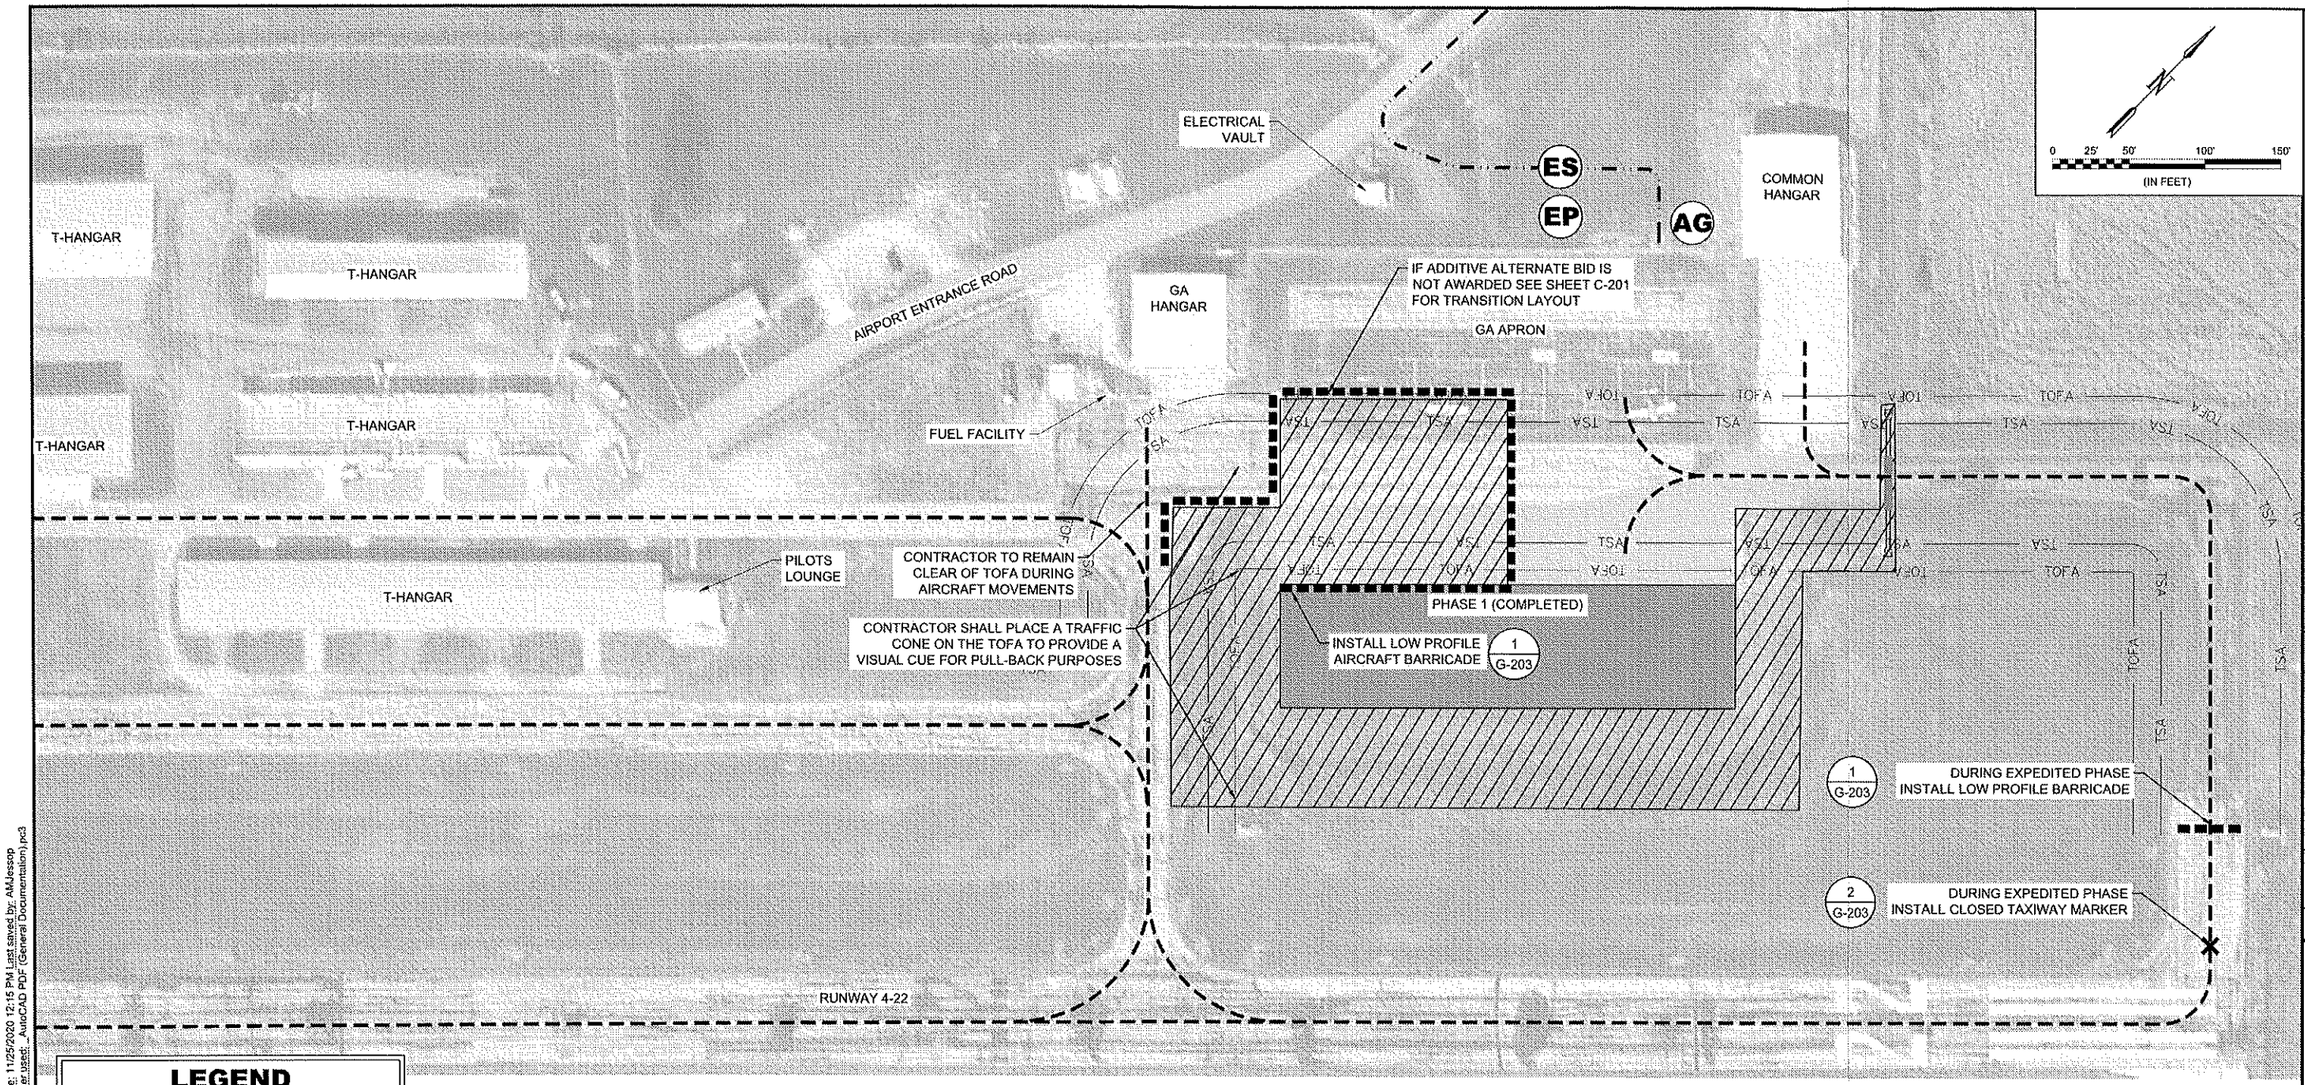

LEGEND

- PHASE 1 (COMPLETED BY OTHERS)
- PHASE 2A WORK AREA
- CONTRACTOR ACCESS ROUTE
- AIRCRAFT ROUTE
- LOW PROFILE BARRICADES
- TAXIWAY CLOSURE MARKER
- ES — EQUIPMENT STAGING AREA
- EP — EMPLOYEE PARKING
- AG — ACCESS GATE
- TSA — TAXIWAY SAFETY AREA
- TOFA — TAXIWAY OBJECT FREE AREA

CONTRACT TIME

PHASE	ITEMS OF WORK	CALENDAR DAYS	AVAILABILITY
PHASE 2A (35 DAYS)	PLACE BARRICADES AND CLOSURE MARKERS. INSTALL EROSION CONTROL MEASURES. PERFORM DEMOLITION AND CLEARING AND GRUBBING. PERFORM SUBGRADE PREPARATION. INSTALL UNDERDRAIN AND OTHER DRAINAGE STRUCTURES AND PERFORM GRADING. INSTALL TIE-DOWN ANCHORS. CONSTRUCT PROPOSED CONCRETE PAVEMENT SECTION. REMOVE BARRICADES AND CLOSURE MARKERS. WORK ADJACENT TO THE COMMON HANGAR SHALL BE PERFORMED WITHIN A FOUR (4) CONSECUTIVE DAY EXPEDITED PHASE, WHICH MAY OCCUR ANYTIME DURING PHASE 2A. THIS WORK INCLUDES DRAINAGE PIPE DEMOLITION, INSTALLATION AND PAVEMENT PATCH ON TAXIWAY A. THE CONTRACTOR SHALL NOTIFY THE ENGINEER AND AIRPORT 72 HOURS BEFORE WORK MAY COMMENCE.		NO THRU-TAXING ON TWY A BETWEEN GA AND COMMON HANGARS
PHASE 2B (25 DAYS)	PLACE BARRICADES AND CLOSURE MARKERS. PERFORM DEMOLITION. PERFORM SUBGRADE PREPARATION. CONSTRUCT PROPOSED CONCRETE PAVEMENT SECTION AND TRANSITION. PERFORM GRADING. INSTALL PROPOSED PAVEMENT MARKING AND TIE-DOWN ANCHORS IN PREVIOUSLY CONSTRUCTED CONCRETE IN PHASE 1. REMOVE BARRICADES AND CLOSURE MARKERS.		NO THRU-TAXING ON TWY A BETWEEN GA AND COMMON HANGARS
PHASE 3* (30 DAYS)	PLACE BARRICADES AND CLOSURE MARKERS. INSTALL EROSION CONTROL MEASURES. PERFORM DEMOLITION AND CLEARING AND GRUBBING. PERFORM SUBGRADE PREPARATION. CONSTRUCT PROPOSED CONCRETE PAVEMENT SECTION. INSTALL PROPOSED PAVEMENT MARKING AND TIE-DOWN ANCHORS. REMOVE BARRICADES AND CLOSURE MARKERS.		NO PARKING ON GA APRON NORTH OF TWY A

0 20 40 60 80 100

*IF ADDITIVE ALTERNATE IS AWARDED, PHASE 3 SHALL BE CONSTRUCTED.

NOTES:

1. CONTRACTOR SHALL MAINTAIN ACCESS TO FUEL FACILITY THROUGHOUT CONSTRUCTION.
2. CONTRACTOR SHALL KEEP ALL ACTIVE TAXIWAYS CLEAR OF FOD AT ALL TIMES.

GARVER
© 2021 GARVER, LLC
THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGNS CONVEYED HEREIN, SHALL BE CONSIDERED INSTRUMENTS OF PROFESSIONAL SERVICE AND ARE PROPERTY OF GARVER, LLC ANY USE, REPRODUCTION, OR DISTRIBUTION OF THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGN CONTAINED HEREIN, IS PROHIBITED UNLESS AUTHORIZED IN WRITING BY GARVER, LLC OR EXPLICITLY ALLOWED IN THE GOVERNING PROFESSIONAL SERVICES AGREEMENT FOR THIS WORK.

STATE OF MISSOURI
JASON C. FURINE
NUMBER PE-2010003051
PROFESSIONAL ENGINEER
9/25/21

REV.	DATE	DESCRIPTION	BY
		ISSUED FOR BID	

CLINTON REGIONAL AIRPORT
CLINTON, MISSOURI

APRON DESIGN
PHASES 2 THROUGH 6

CONSTRUCTION SAFETY AND PHASING PLAN - PHASE 2A (BASE BID)


JOB NO.: 19A15701
DATE: FEB 2021
DESIGNED BY: JCF
DRAWN BY: JAH

BAR IS ONE INCH ON ORIGINAL DRAWING
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

DRAWING NUMBER
G-205

SHEET NUMBER **8**

File: L:\2019\19A15701 - GLY Apron Phase 2 Through 6 DS\Drawings\GLY-4-PN-G205-CS.dwg Last Save: 11/25/2020 12:15 PM Last saved by: AMJessop
Last plotted by: Penn, Collin M. Plot Style: AECmono.ctb Plot Scale: 1:1 Plot Date: 2/18/2021 2:37 PM Plotter used: AutoCAD PDF (General Documentation).pc3

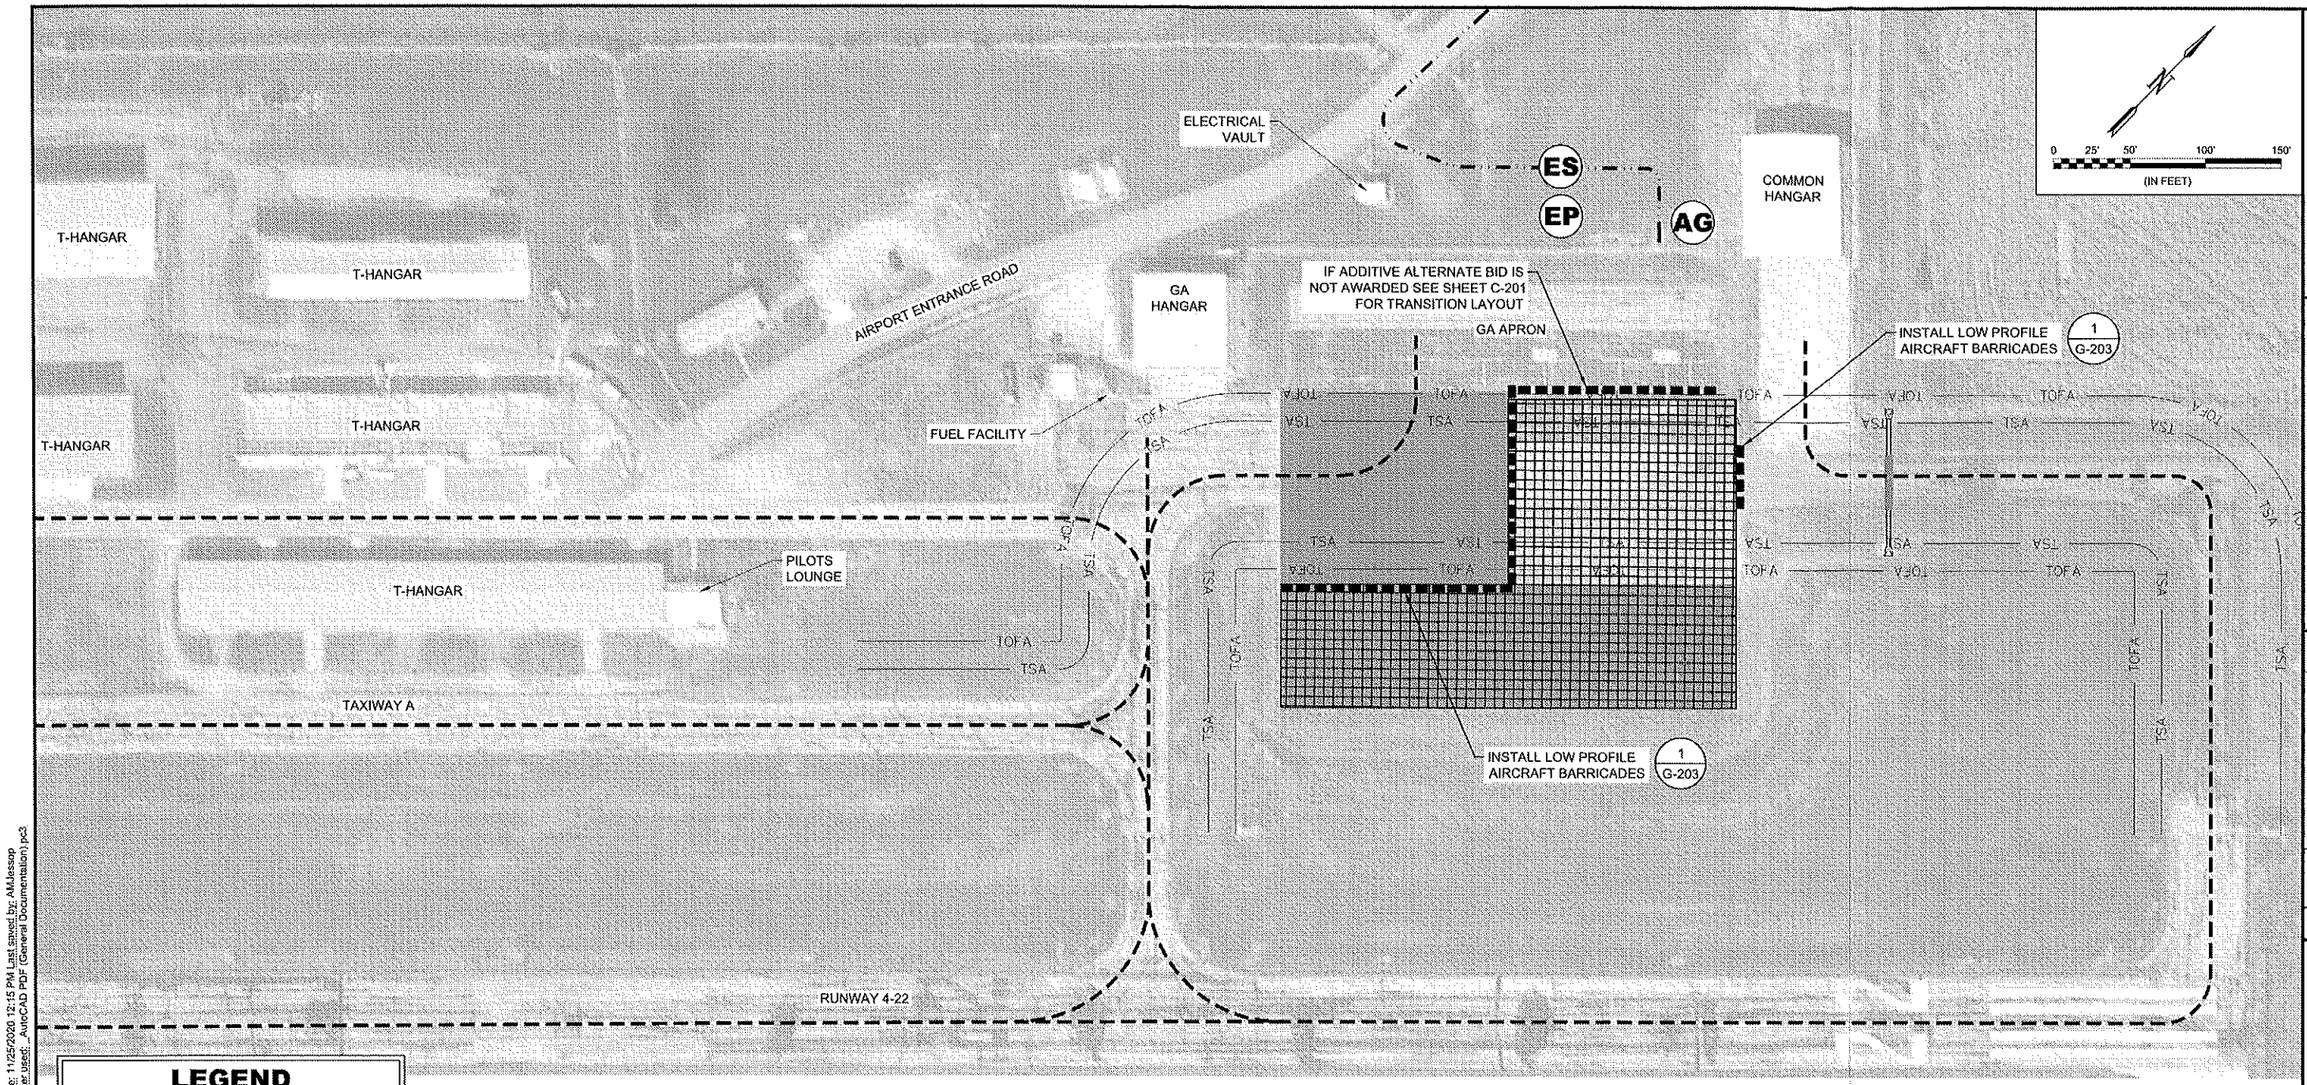

LEGEND

- PHASE 1 (COMPLETED BY OTHERS)
- PHASE 2B WORK AREA
- CONTRACTOR ACCESS ROUTE
- AIRCRAFT ROUTE
- LOW PROFILE BARRICADES
- TAXIWAY CLOSURE MARKER
- ES — EQUIPMENT STAGING AREA
- EP — EMPLOYEE PARKING
- AG — ACCESS GATE
- TSA — TAXIWAY SAFETY AREA
- TOFA — TAXIWAY OBJECT FREE AREA

CONTRACT TIME

PHASE	ITEMS OF WORK	CALENDAR DAYS	AVAILABILITY
PHASE 2A (35 DAYS)	PLACE BARRICADES AND CLOSURE MARKERS. INSTALL EROSION CONTROL MEASURES. PERFORM DEMOLITION AND CLEARING AND GRUBBING. PERFORM SUBGRADE PREPARATION. INSTALL UNDERDRAIN AND OTHER DRAINAGE STRUCTURES AND PERFORM GRADING. INSTALL TIE-DOWN ANCHORS. CONSTRUCT PROPOSED CONCRETE PAVEMENT SECTION. REMOVE BARRICADES AND CLOSURE MARKERS. WORK ADJACENT TO THE COMMON HANGAR SHALL BE PERFORMED WITHIN A FOUR (4) CONSECUTIVE DAY EXPEDITED PHASE, WHICH MAY OCCUR ANYTIME DURING PHASE 2A. THIS WORK INCLUDES DRAINAGE PIPE DEMOLITION, INSTALLATION AND PAVEMENT PATCH ON TAXIWAY A. THE CONTRACTOR SHALL NOTIFY THE ENGINEER AND AIRPORT 72 HOURS BEFORE WORK MAY COMMENCE.		NO THRU-TAXING ON TWY A BETWEEN GA AND COMMON HANGARS
PHASE 2B (25 DAYS)	PLACE BARRICADES AND CLOSURE MARKERS. PERFORM DEMOLITION. PERFORM SUBGRADE PREPARATION. CONSTRUCT PROPOSED CONCRETE PAVEMENT SECTION AND TRANSITION. PERFORM GRADING. INSTALL PROPOSED PAVEMENT MARKING AND TIE-DOWN ANCHORS IN PREVIOUSLY CONSTRUCTED CONCRETE IN PHASE 1. REMOVE BARRICADES AND CLOSURE MARKERS.		NO THRU-TAXING ON TWY A BETWEEN GA AND COMMON HANGARS
PHASE 3* (30 DAYS)	PLACE BARRICADES AND CLOSURE MARKERS. INSTALL EROSION CONTROL MEASURES. PERFORM DEMOLITION AND CLEARING AND GRUBBING. PERFORM SUBGRADE PREPARATION. CONSTRUCT PROPOSED CONCRETE PAVEMENT SECTION. INSTALL PROPOSED PAVEMENT MARKING AND TIE-DOWN ANCHORS. REMOVE BARRICADES AND CLOSURE MARKERS.		NO PARKING ON GA APRON NORTH OF TWY A

0 20 40 60 80 100

*IF ADDITIVE ALTERNATE IS AWARDED, PHASE 3 SHALL BE CONSTRUCTED.

NOTES:

1. CONTRACTOR SHALL MAINTAIN ACCESS TO FUEL FACILITY THROUGHOUT CONSTRUCTION.
2. CONTRACTOR SHALL KEEP ALL ACTIVE TAXIWAYS CLEAR OF FOD AT ALL TIMES.

GARVER
© 2021 GARVER, LLC
THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGNS CONVEYED HEREIN, SHALL BE CONSIDERED INSTRUMENTS OF PROFESSIONAL SERVICE AND ARE PROPERTY OF GARVER, LLC. ANY USE, REPRODUCTION, OR DISTRIBUTION OF THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGN CONTAINED HEREIN, IS PROHIBITED UNLESS AUTHORIZED IN WRITING BY GARVER, LLC OR EXPLICITLY ALLOWED IN THE GOVERNING PROFESSIONAL SERVICES AGREEMENT FOR THIS WORK.

STATE OF MISSOURI
JASON C. FUHINI
NUMBER PE-2010003911
PROFESSIONAL ENGINEER
3/05/21

REV.	DATE	DESCRIPTION	BY
		ISSUED FOR BID	

CLINTON REGIONAL AIRPORT
CLINTON, MISSOURI

APRON DESIGN
PHASES 2 THROUGH 6

CONSTRUCTION SAFETY AND PHASING PLAN - PHASE 2B (BASE BID)


JOB NO.: 19A15701
DATE: FEB 2021
DESIGNED BY: JCF
DRAWN BY: JAH

BAR IS ONE INCH ON ORIGINAL DRAWING
0 1"
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

DRAWING NUMBER
G-206

SHEET NUMBER 9

File: L:\2019\19A15701 -GLY Apron Phase 2 Through 6 DS\Drawings\GLY1-APN-G205-CS.dwg Last Save: 11/25/2020 12:15 PM Last saved by: AMJessop
Last plotted by: Petri, Collin M. Plot Style: AECmono.ctb Plot Scale: 1:1 Plot Date: 2/18/2021 2:37 PM Plotter used: _AutoCAD PDF (General Documentation).pc3

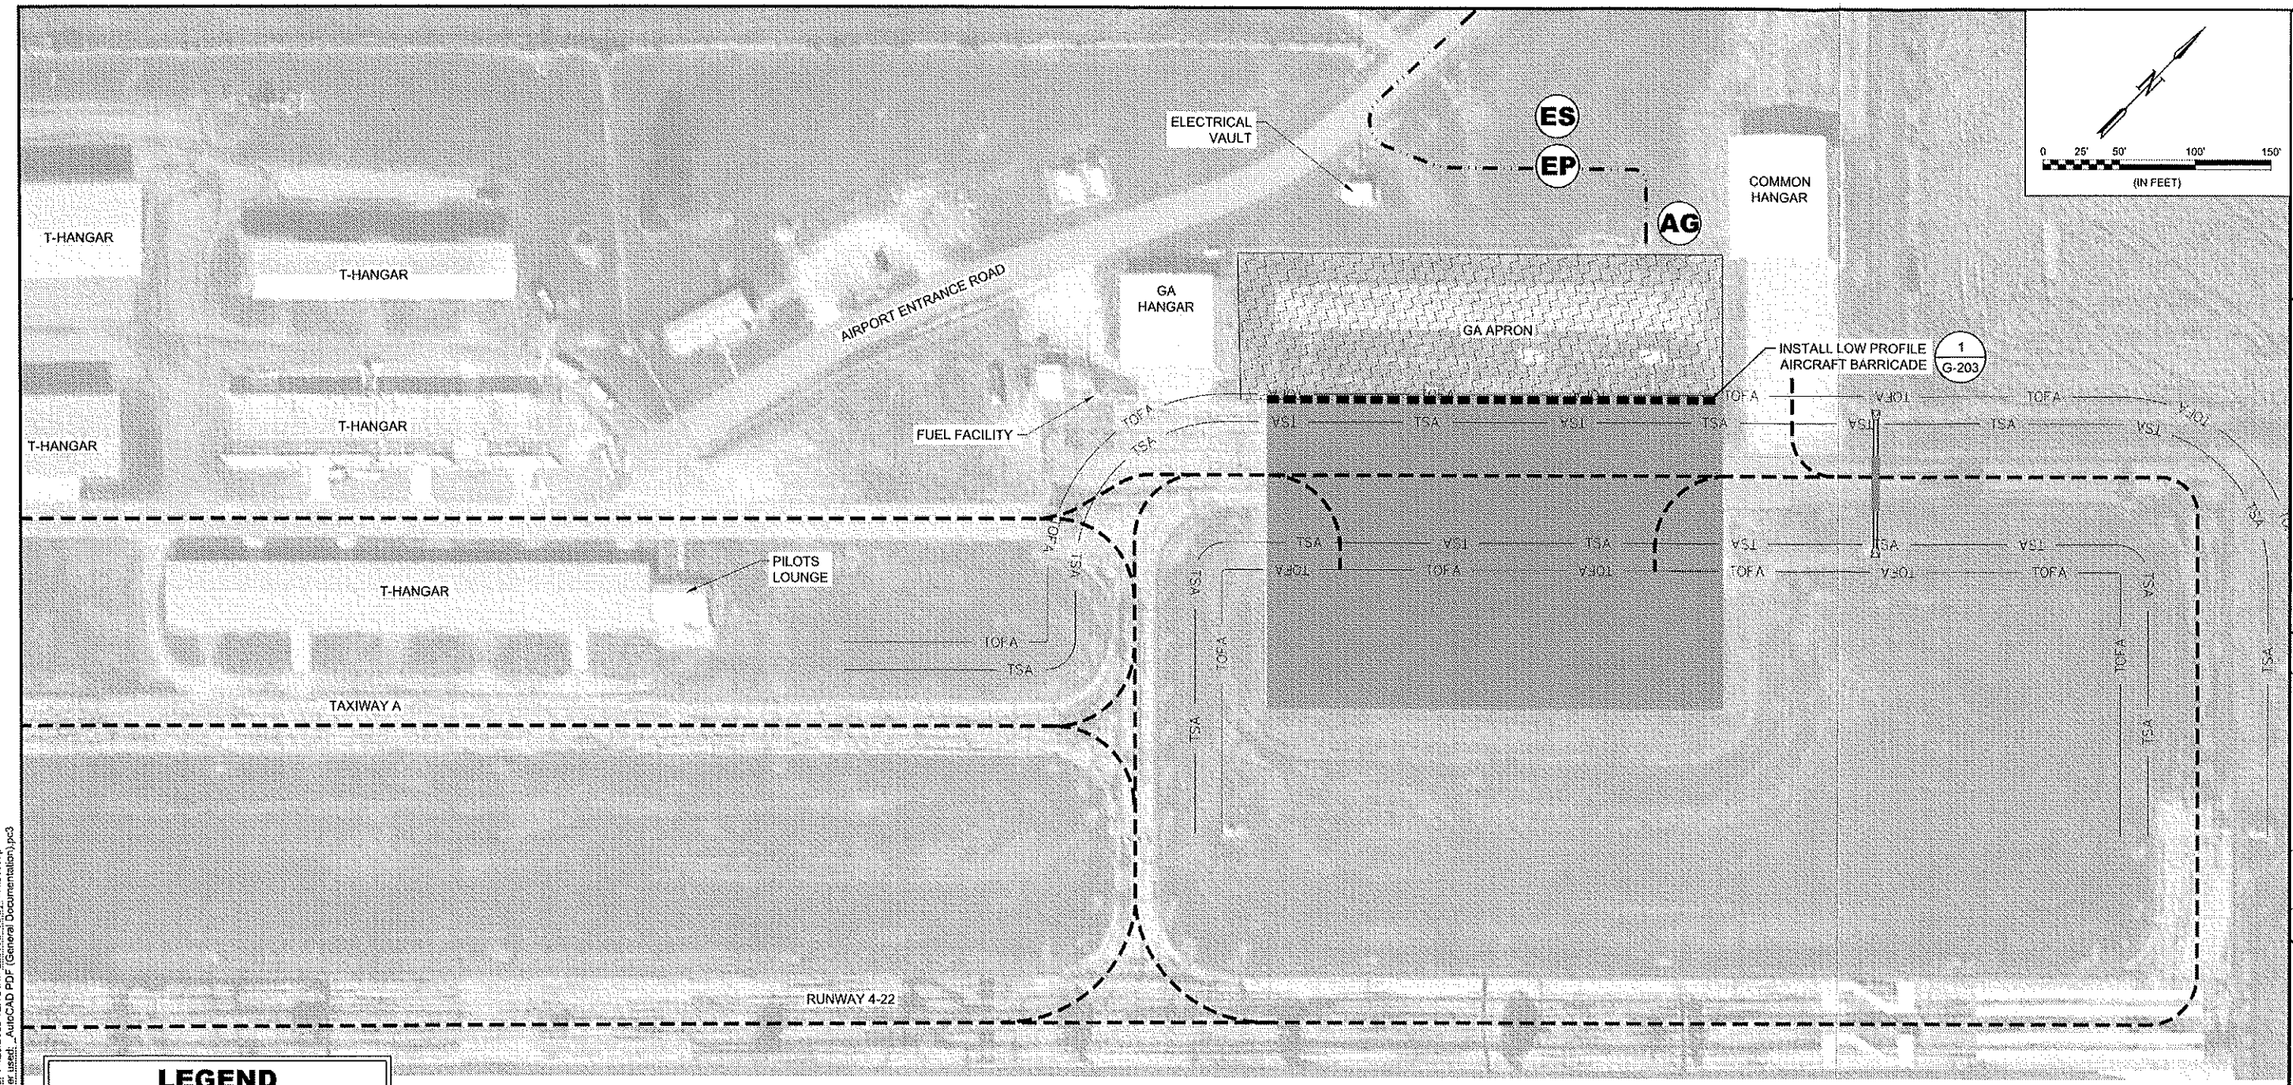

LEGEND

- PHASE 1 (COMPLETED BY OTHERS)
- PHASE 3 WORK AREA
- CONTRACTOR ACCESS ROUTE
- AIRCRAFT ROUTE
- LOW PROFILE BARRICADES
- TAXIWAY CLOSURE MARKER
- ES — EQUIPMENT STAGING AREA
- EP — EMPLOYEE PARKING
- AG — ACCESS GATE
- TSA — TAXIWAY SAFETY AREA
- TOFA — TAXIWAY OBJECT FREE AREA

CONTRACT TIME

PHASE	ITEMS OF WORK	CALENDAR DAYS	AVAILABILITY
PHASE 2A (35 DAYS)	PLACE BARRICADES AND CLOSURE MARKERS. INSTALL EROSION CONTROL MEASURES. PERFORM DEMOLITION AND CLEARING AND GRUBBING. PERFORM SUBGRADE PREPARATION. INSTALL UNDERDRAIN AND OTHER DRAINAGE STRUCTURES AND PERFORM GRADING. INSTALL TIE-DOWN ANCHORS. CONSTRUCT PROPOSED CONCRETE PAVEMENT SECTION. REMOVE BARRICADES AND CLOSURE MARKERS. WORK ADJACENT TO THE COMMON HANGAR SHALL BE PERFORMED WITHIN A FOUR (4) CONSECUTIVE DAY EXPEDITED PHASE, WHICH MAY OCCUR ANYTIME DURING PHASE 2A. THIS WORK INCLUDES DRAINAGE PIPE DEMOLITION, INSTALLATION AND PAVEMENT PATCH ON TAXIWAY A. THE CONTRACTOR SHALL NOTIFY THE ENGINEER AND AIRPORT 72 HOURS BEFORE WORK MAY COMMENCE.		NO THRU-TAXING ON TWY A BETWEEN GA AND COMMON HANGARS
PHASE 2B (25 DAYS)	PLACE BARRICADES AND CLOSURE MARKERS. PERFORM DEMOLITION. PERFORM SUBGRADE PREPARATION. CONSTRUCT PROPOSED CONCRETE PAVEMENT SECTION AND TRANSITION. PERFORM GRADING. INSTALL PROPOSED PAVEMENT MARKING AND TIE-DOWN ANCHORS IN PREVIOUSLY CONSTRUCTED CONCRETE IN PHASE 1. REMOVE BARRICADES AND CLOSURE MARKERS.		NO THRU-TAXING ON TWY A BETWEEN GA AND COMMON HANGARS
PHASE 3* (30 DAYS)	PLACE BARRICADES AND CLOSURE MARKERS. INSTALL EROSION CONTROL MEASURES. PERFORM DEMOLITION AND CLEARING AND GRUBBING. PERFORM SUBGRADE PREPARATION. CONSTRUCT PROPOSED CONCRETE PAVEMENT SECTION. INSTALL PROPOSED PAVEMENT MARKING AND TIE-DOWN ANCHORS. REMOVE BARRICADES AND CLOSURE MARKERS.		NO PARKING ON GA APRON NORTH OF TWY A

0 20 40 60 80 100

*IF ADDITIVE ALTERNATE IS AWARDED, PHASE 3 SHALL BE CONSTRUCTED.

NOTES:

1. CONTRACTOR SHALL MAINTAIN ACCESS TO FUEL FACILITY THROUGHOUT CONSTRUCTION.
2. CONTRACTOR SHALL KEEP ALL ACTIVE TAXIWAYS CLEAR OF FOD AT ALL TIMES.

GARVER
© 2021 GARVER, LLC
THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGNS CONVEYED HEREIN, SHALL BE CONSIDERED INSTRUMENTS OF PROFESSIONAL SERVICE AND ARE PROPERTY OF GARVER, LLC. ANY USE, REPRODUCTION, OR DISTRIBUTION OF THIS DOCUMENT, ALONG WITH THE IDEAS AND DESIGN CONTAINED HEREIN, IS PROHIBITED UNLESS AUTHORIZED IN WRITING BY GARVER, LLC OR EXPLICITLY ALLOWED IN THE GOVERNING PROFESSIONAL SERVICES AGREEMENT FOR THIS WORK.

STATE OF MISSOURI
JASON C. FUGINE
NUMBER PE-2010003951
PROFESSIONAL ENGINEER

REV.	DATE	DESCRIPTION	BY
		ISSUED FOR BID	

CLINTON REGIONAL AIRPORT
CLINTON, MISSOURI

APRON DESIGN
PHASES 2 THROUGH 6

CONSTRUCTION SAFETY AND PHASING PLAN - PHASE 3 (ADD. ALT. BID)

JOB NO.: 19A15701
DATE: FEB 2021
DESIGNED BY: JCF
DRAWN BY: JAH

BAR IS ONE INCH ON ORIGINAL DRAWING
0 1"
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

DRAWING NUMBER
G-207

SHEET NUMBER 10

File: L:\2019\19A15701 -GLY Apron Phase 2 Through 6 DS\Drawings\GLY1-APN-G205-CS.dwg Last Save: 11/25/2020 12:15 PM Last saved by: AMJessop
Last plotted by: Petri, Collin M. Plot Style: AECmono.ctb Plot Scale: 1:1 Plot Date: 2/18/2021 2:38 PM Plotter used: _AutoCAD PDF (General Documentation).pc3

CONSTRUCTION PROJECT DAILY SAFETY INSPECTION CHECKLIST

The situations identified below are potentially hazardous conditions that may occur during airport construction projects. Safety area encroachments, unauthorized and improper ground vehicle operations, and unmarked or uncovered holes and trenches near aircraft operating surfaces pose the most prevalent threats to airport operational safety during airport construction projects. The list below is one tool that the airport operator or contractor may use to aid in identifying and correcting potentially hazardous conditions. It should be customized as appropriate for each project including information such as the date, time and name of the person conducting the inspection.

Table 1. Potentially Hazardous Conditions

Item	Action Required (Describe)	No Action Required (Check)
Excavation adjacent to runways, taxiways, and aprons improperly backfilled.		
Mounds of earth, construction materials, temporary structures, and other obstacles near any open runway, taxiway, or taxi lane; in the related Object Free area and aircraft approach or departure areas/zones; or obstructing any sign or marking.		
Runway resurfacing projects resulting in lips exceeding 3 inch (7.6 cm) from pavement edges and ends.		
Heavy equipment (stationary or mobile) operating or idle near AOA, in runway approaches and departures areas, or in OFZ.		
Equipment or material near NAVAIDs that may degrade or impair radiated signals and/or the monitoring of navigation and visual aids. Unauthorized or improper vehicle operations in localizer or glide slope critical areas, resulting in electronic interference and/or facility shutdown.		
Tall and especially relatively low visibility units (that is, equipment with slim profiles) — cranes, drills, and similar objects — located in critical areas, such as OFZ and		

Item	Action Required (Describe)	No Action Required (Check)
approach zones.		
Improperly positioned or malfunctioning lights or unlighted airport hazards, such as holes or excavations, on any apron, open taxiway, or open taxi lane or in a related safety, approach, or departure area.		
Obstacles, loose pavement, trash, and other debris on or near AOA. Construction debris (gravel, sand, mud, paving materials) on airport pavements may result in aircraft propeller, turbine engine, or tire damage. Also, loose materials may blow about, potentially causing personal injury or equipment damage.		
Inappropriate or poorly maintained fencing during construction intended to deter human and animal intrusions into the AOA. Fencing and other markings that are inadequate to separate construction areas from open AOA create aviation hazards.		
Improper or inadequate marking or lighting of runways (especially thresholds that have been displaced or runways that have been closed) and taxiways that could cause pilot confusion and provide a potential for a runway incursion. Inadequate or improper methods of marking, barricading, and lighting of temporarily closed portions of AOA create aviation hazards.		
Wildlife attractants — such as trash (food scraps not collected from construction personnel activity), grass seeds, tall grass, or standing water — on or near airports.		
Obliterated or faded temporary markings on active operational areas.		
Misleading or malfunctioning obstruction lights. Unlighted or unmarked obstructions in the approach to any open runway pose aviation hazards.		

Item	Action Required (Describe)	No Action Required (Check)
Failure to issue, update, or cancel NOTAMs about airport or runway closures or other construction related airport conditions.		
Failure to mark and identify utilities or power cables. Damage to utilities and power cables during construction activity can result in the loss of runway / taxiway lighting; loss of navigation, visual, or approach aids; disruption of weather reporting services; and/or loss of communications.		
Restrictions on ARFF access from fire stations to the runway / taxiway system or airport buildings.		
Lack of radio communications with construction vehicles in airport movement areas.		
Objects, regardless of whether they are marked or flagged, or activities anywhere on or near an airport that could be distracting, confusing, or alarming to pilots during aircraft operations.		
Water, snow, dirt, debris, or other contaminants that temporarily obscure or derogate the visibility of runway/taxiway marking, lighting, and pavement edges. Any condition or factor that obscures or diminishes the visibility of areas under construction.		
Spillage from vehicles (gasoline, diesel fuel, oil) on active pavement areas, such as runways, taxiways, aprons, and airport roadways.		
Failure to maintain drainage system integrity during construction (for example, no temporary drainage provided when working on a drainage system).		

Item	Action Required (Describe)	No Action Required (Check)
Failure to provide for proper electrical lockout and tagging procedures. At larger airports with multiple maintenance shifts/workers, construction contractors should make provisions for coordinating work on circuits.		
Failure to control dust. Consider limiting the amount of area from which the contractor is allowed to strip turf.		
Exposed wiring that creates an electrocution or fire ignition hazard. Identify and secure wiring, and place it in conduit or bury it.		
Site burning, which can cause possible obscuration.		
Construction work taking place outside of designated work areas and out of phase.		

PROPOSAL FORM

City of Clinton, Missouri
State Block Grant Project No. **19-022A-1**

TO: City/County Manager

The undersigned, in compliance with the request for bids for construction of the following Project:

Apron Design Phases 2 Through 6: Construct new apron pavement. Work includes, but is not limited to, concrete pavement construction, asphalt transition, earthwork and associated items.

Hereby proposes to furnish all labor, permits, material, machinery, tools, supplies and equipment to faithfully perform all work required for construction of the Project in accordance with the project manual, project drawings and issued Addenda within the specified time of performance for the following prices:

BASE BID

BID ITEM	FAA or MoDOT SPEC.	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		EXTENSION	
				DOLLARS	CTS	DOLLARS	CTS
1	SS-120-3.1	Construction Safety and Security	1 LS	20,000	00	20000	00
2	SS-130-4.1	Trench and Excavation Safety Systems	1 LS	1,300	00	1,300	00
3	SS-262-5.1	Tiedown Anchor	15 EA	840	00	12,600	00
4	SS-300-5.1	Lockout/Tagout and Constant Current Regulator Calibration Procedures	1 LS	1,960	00	1,960	00
5	C-100-14.1	Contractor Quality Control Program	1 LS	33,000	00	33,000	00
6	C-102-5.1	Temporary Erosion Control	1 LS	4,000	00	4,000	00
7	C-105-6.1	Mobilization (Maximum 10% of Total Bid)	1 LS	65,000	00	65,000	00
8	P-101-5.1	Asphalt Pavement Removal	4,284 SY	4	00	17,136	00
9	P-101-5.3	Asphalt Pavement Markings Removal	535 SY	9	50	5082	50
10	P-101-5.6	Cold Milling (2 inch)	161 SY	25	00	4025	00
11	P-152-4.1	Unclassified Excavation	2,000 CY	17	50	35,000	00
12	P-152-4.2	Unsuitable Excavation	200 CY	75	00	15,000	00
13	P-208-5.1	Aggregate Base Course (4 in)	4,083 SY	10	00	40,830	00
14	P-208-5.2	Aggregate Base Course (Varying Depth)	19 SY	60	00	1140	00
15	P-403-8.1	Asphalt Mixture Surface Course	56 TON	250	00	14,000	00
16	P-501-8.1	7" Concrete Pavement	4,049 SY	84	00	340,116	00

17	P-620-5.1	Runway and Taxiway Marking	2,800 SF	7	00	19,600	00
18	D-701-5.1	30" RCP (Class IV)	84 LF	160	00	13,440	00
19	D-701-5.2	MoDOT Precast Concrete Flared End Sections	2 EA	2,100	00	4,200	00
20	T-901-5.1	Seeding	0.70 AC	11,000	00	7,700	00
21	T-904-5.1	Sodding	1,778 SY	7	20	12,801	60
22	L-108-5.1	No. 8 AWG, 5 kV, L-824, Type C Cable, Installed in Trench, Duct Bank or Conduit	1,710 LF	3	50	5,985	00
23	L-108-5.2	No. 6 AWG, Solid, Bare Copper Counterpoise Wire, Installed in Trench, Duct Bank, or Conduit, Including Connections/Terminations	430 LF	8	00	3,440	00
24	L-108-5.3	No. 6 AWG, 600V Rated, Type XPLE/USE Cable, Installed in Trench, Duct Bank, or Conduit	250 LF	4	50	1,125	00
25	L-108-5.4	No. 6 AWG, 600V Rated, Type XPLE/USE, Green Insulated Equipment Ground, Installed in Trench, Duct Bank, or Conduit	130 LF	4	50	585	00
26	L-110-5.1	Non-Encased Electrical Duct Bank, 1-Way 2"C	300 LF	14	00	4,200	00
27	L-110-5.2	Non-Encased Electrical Duct Bank, 2-Way 2"C	130 LF	16	00	2,080	00
28	L-115-5.1	Concrete Encased Electrical Junction Structure, L-867D Class 1, Size 16" Diameter by 24" Depth	1 EA	1,856	00	1,856	00
29	L-115-5.2	Concrete Encased Electrical Junction Structure Plaza, Two L-867D Class 1, Size 16" Diameter by 24" Depth	2 EA	4,600	00	9,200	00
30	L-125-5.1	L-853 Elevated Retroreflective Markers with Concrete Pad, Installed	21 EA	450	00	9,450	00
TOTAL BID (Base Bid)						705,852	10

BASE BID OPTION 1: Fly Ash Treated Subgrade

BID ITEM	FAA or MoDOT SPEC.	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		EXTENSION	
				DOLLARS	CTS	DOLLARS	CTS
1	P-158-8.1	Fly Ash Treated Subgrade	4,083 SY	6	75	27,560	25
2	P-158-8.2	Fly Ash	303 TON	85	00	25,755	00
TOTAL BID (Base Bid Option 1)						53,315	25

BASE BID OPTION 2: Lime Treated Subgrade							
BID ITEM	FAA or MoDOT SPEC.	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		EXTENSION	
				DOLLARS	CTS	DOLLARS	CTS
1	P-155-8.1	Lime Treated Subgrade	4,083 SY				
2	P-155-8.2	Lime	160 TON				
TOTAL BID (Base Bid Option 2)							

BASE BID OPTION 3: Lime Kiln Dust Treated Subgrade							
BID ITEM	FAA or MoDOT SPEC.	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		EXTENSION	
				DOLLARS	CTS	DOLLARS	CTS
1	P-157-8.1	Lime Kiln Dust Treated Subgrade	4,083 SY				
2	P-157-8.2	Lime Kiln Dust	170 TON				
TOTAL BID (Base Bid Option 3)							

Basis of Award – Base Bid: Basis of award shall be the lowest aggregate of the Base Bid plus Base Bid Option that is within the available project funding. The options of combined schedules to be considered for award is as follows:

- Base Bid + Base Bid Option 1
- Base Bid + Base Bid Option 2
- Base Bid + Base Bid Option 3

ADDITIVE ALTERNATE 1							
BID ITEM	FAA or MoDOT SPEC.	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		EXTENSION	
				DOLLARS	CTS	DOLLARS	CTS
1	SS-262-5.1	Tiedown Anchor	18 EA	925	00	16,650	00
2	P-101-5.1	Asphalt Pavement Removal	2,133 SY	4	60	9,811	80
3	P-101-5.2	Concrete Pavement Removal	29 SY	32	00	928	00
4	P-101-5.3	Pavement Markings Removal	(375) SF	4	00	– 1,500	00
5	P-101-5.6	Cold Milling (2 inch)	(161) SY	25	00	– 4025	00
6	P-152-4.1	Unclassified Excavation	250 CY	25	00	6,250	00
7	P-152-4.2	Unsuitable Excavation	30 CY	180	00	5,400	00
8	P-208-5.1	Aggregate Base Course (4 in)	2,466 SY	6	50	16,029	00
9	P-403-8.1	Asphalt Mixture Surface Course	(56) TON	250	00	– 14,000	00
10	P-501-8.1	7" Concrete Pavement	2,417 SY	82	00	198,194	00
11	P-620-5.1	Runway and Taxiway Marking (Phase 2 - remarking of existing pavement)	(1,041) SF	6	00	– 6,246	00

12	P-620-5.1	Runway and Taxiway Marking	1,119 SF	7	00	7,833	00
13	T-901-5.1	Seeding	0.15 AC	11,000	00	1,650	00
14	T-904-5.1	Sodding	540.00 SY	7	20	3,888	00
TOTAL BID (Additive Alternate 1)						240,862	80

ADDTIVE ALTERNATE 1 OPTION 1: Fly Ash Treated Subgrade

BID ITEM	FAA or MoDOT SPEC.	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		EXTENSION	
				DOLLARS	CTS	DOLLARS	CTS
1	P-158-8.1	Fly Ash Treated Subgrade	2,517 SY	6	50	16,360	50
2	P-158-8.2	Fly Ash	187 TON	85	00	15,895	00
TOTAL BID (Additive Alternate 1 Option 1)						32,255	50

ADDTIVE ALTERNATE 1 OPTION 2: Lime Treated Subgrade

BID ITEM	FAA or MoDOT SPEC.	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		EXTENSION	
				DOLLARS	CTS	DOLLARS	CTS
1	P-155-8.1	Lime Treated Subgrade	2,517 SY				
2	P-155-8.2	Lime	86 TON				
TOTAL BID (Additive Alternate 1 Option 2)							

ADDTIVE ALTERNATE 1 OPTION 3: Lime Kiln Dust Treated Subgrade

BID ITEM	FAA or MoDOT SPEC.	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		EXTENSION	
				DOLLARS	CTS	DOLLARS	CTS
1	P-157-8.1	Lime Kiln Dust Treated Subgrade	2,517 SY				
2	P-157-8.2	Lime Kiln Dust	105 TON				
TOTAL BID (Additive Alternate 1 Option 3)							

Basis of Award – Additive Alternate 1: Basis of award for additive alternate is dependent on available project funding. If selected, the selected option shall be the lowest aggregate of Additive Alternate 1 plus Additive Alternate Bid Option that is within the available project funding. The options of combined schedules to be considered for award is as follows:

- Additive Alternate 1 + Additive Alternate 1 Option 1
- Additive Alternate 1 + Additive Alternate 1 Option 2
- Additive Alternate 1 + Additive Alternate 1 Option 3

ACKNOWLEDGEMENTS BY BIDDER

a. By submittal of a proposal, the BIDDER acknowledges and accepts that the quantities established by the OWNER are an approximate estimate of the quantities required to fully complete the Project and that the estimated quantities are principally intended to serve as a basis for evaluation of bids. The BIDDER further acknowledges and accepts that payment under this contract will be made only for actual quantities and that quantities will vary in accordance with the General Provisions subsection entitled "Alteration of Work and Quantities".

b. The BIDDER acknowledges and accepts that the Bid Documents are comprised of the documents identified within the General Provisions. The BIDDER further acknowledges that each the individual documents that comprise the Bid Documents are complementary to one another and together establishes the complete terms, conditions and obligations of the successful BIDDER.

c. As evidence of good faith in submitting this proposal, the undersigned encloses a bid guaranty in the form of a certified check, cashier's check or bid bond in the amount of 5% of the bid price. The BIDDER acknowledges and accepts that refusal or failure to accept award and execute a contract within the terms and conditions established herein will result in forfeiture of the bid guaranty to the owner as a liquidated damage.

d. The BIDDER acknowledges and accepts the OWNER'S right to reject any or all bids.

e. The BIDDER acknowledges and accepts the OWNER'S right to hold all Proposals for purposes of review and evaluation and not issue a notice of award for a period not to exceed **ninety (90)** calendar days from the stated date for receipt of bids.

f. The undersigned agrees that upon written notice of award of contract, he or she will execute the contract within thirty (30) days of the notice of award, and furthermore, and provide executed payment and performance bonds within fifteen (15) days from the date of contract execution. The undersigned accepts that failure to execute the contract and provide the required bonds within the stated timeframe shall result in forfeiture of the bid guaranty to the owner as a liquidated damage.

g. Time of Performance: By submittal of this proposal, the undersigned acknowledges and agrees to commence work within ten (10) calendar days of the date specified in the written "Notice to Proceed" as issued by the OWNER. The undersigned further agrees to complete the Project Base Bid within **sixty (60) calendar days** and, if selected, the Project Base Bid and Additive Alternate within **ninety (90) calendar days** from the commencement date specified in the Notice to Proceed.

h. The undersigned acknowledges and accepts that for each and every Calendar day the project remains incomplete beyond the contract time of performance, the Contractor shall pay the non-penal amount of **$1,000** per Calendar day as a liquidated damage to the OWNER.

i. The undersigned prime contractor, if not a MoDOT certified DBE, hereby assures that they will subcontract **seven (7%)** percent of the dollar value of the prime contract to DBE firms or make good faith efforts to meet the DBE contract goal. In addition, the prime contractor will include the DBE clauses (see Supplementary Provision No. 6 of the Federal and State Provisions) required by the DBE Program adopted by MoDOT and the Sponsor in all contracts and subcontracts relating to this project. The undersigned will complete the DBE Participation information included herein when a DBE goal has been established, including a demonstration of good faith efforts if the DBE goal is not met. If the undersigned prime contractor is a MoDOT certified DBE firm, then the prime contractor must perform at least thirty percent (30%) of the total contract value work with its own forces, and will receive DBE credit for all work which the prime contractor and any other MoDOT certified DBE firm performs directly.

j. The BIDDER, by submission of a proposal, acknowledges that award of this contract is subject to the provisions of the Davis-Bacon Act and the Missouri Prevailing Wage Law. The BIDDER accepts the requirement to pay prevailing wages for each classification and type of worker as established in the attached

wage rate determinations as issued by the United States Department of Labor and the Missouri Division of Labor Standards. The BIDDER further acknowledges and accepts their requirement to incorporate the provision to pay the established prevailing wages in every subcontract agreement entered into by the Bidder under this project. The highest rate between the two (Federal and State) for each job classification shall be considered the prevailing wage.

k. Compliance Reports (41 CFR Part 60-1.7): Within 30 days after award of this contract, the Contractor/Subcontractor shall file a compliance report (Standard Form 100) if s/he has not submitted a complete compliance report within 12 months preceding the date of award. This report is required if the Contractor/Subcontractor meets all of the following conditions:

1. Contractors/Subcontractors are not exempt based on 41 CFR 60-1.5.
2. Has 50 or more employees.
3. Is a prime contractor or first tier subcontractor.
4. There is a contract, subcontract, or purchase order amounting to $50,000 or more

l. The undersigned acknowledges receipt of the following addenda:

Addendum No. 1, dated 3/11/2021		Date Received	3/17/2021
Addendum No. 2, dated 3/19/2021		Date Received	3/19/2021
Addendum No. 3, dated 3/21/2021		Date Received	3/21/2021
Addendum No. 4, dated 3/22/2021		Date Received	3/22/2021
Addendum No. _____, dated _____		Date Received	_____

REPRESENTATIONS BY BIDDER

By submittal of a proposal (bid), the BIDDER represents the following:

a. The BIDDER has read and thoroughly examined the bid documents, including all authorized addenda.
b. The BIDDER has a complete understanding of the terms and conditions required for the satisfactory performance of project work.
c. The BIDDER has fully informed themselves of the project site, the project site conditions and the surrounding area.
d. The BIDDER has familiarized themselves with the requirements of working on an operating airport and understands the conditions that may in any manner affect cost, progress or performance of the work.
e. The BIDDER has correlated their observations with that of the project documents.
f. The BIDDER has found no errors, conflicts, ambiguities or omissions in the project documents, except as previously submitted in writing to the owner that would affect cost, progress or performance of the work.
g. The BIDDER is familiar with all applicable Federal, State and local laws, rules and regulations pertaining to execution of the contract and the project work.
h. The BIDDER has complied with all requirements of these instructions and the associated project documents.

CERTIFICATIONS BY BIDDER

a. The undersigned hereby declares and certifies that the only parties interested in this proposal are named herein and that this proposal is made without collusion with any other person, firm or corporation. The undersigned further certifies that no member, officer or agent of OWNER'S has direct or indirect financial interest in this proposal.

b. **Trade Restriction Certification (49 U.S.C. § 50104, 49 CFR Part 30)**

The submission of an offer, the Offeror certifies that with respect to this solicitation and any resultant contract, the Offeror:

1. is not owned or controlled by one or more citizens of a foreign country included in the list of countries that discriminate against U.S. firms published by the Office of the United States Trade Representative (U.S.T.R.);

2. has not knowingly entered into any contract or subcontract for this project with a person that is a citizen or national of a foreign country included on the list of countries that discriminate against U.S. firms as published by the U.S.T.R.; and

3. has not entered into any subcontract for any product to be used on the project that is produced in a foreign country included on the list of countries that discriminate against U.S. firms published by the U.S.T.R.

This certification concerns a matter within the jurisdiction of an agency of the United States of America and the making of a false, fictitious, or fraudulent certification may render the maker subject to prosecution under Title 18, United States Code, Section 1001.

The Offeror/Contractor must provide immediate written notice to the Owner if the Offeror/Contractor learns that its certification or that of a subcontractor was erroneous when submitted or has become erroneous by reason of changed circumstances. The Contractor must require subcontractors provide immediate written notice to the Contractor if at any time it learns that its certification was erroneous by reason of changed circumstances.

Unless the restrictions of this clause are waived by the Secretary of Transportation in accordance with 49 CFR 30.17, no contract shall be awarded to an Offeror or subcontractor:

1. who is owned or controlled by one or more citizens or nationals of a foreign country included on the list of countries that discriminate against U.S. firms published by the U.S.T.R. or

2. whose subcontractors are owned or controlled by one or more citizens or nationals of a foreign country on such U.S.T.R. list or

3. who incorporates in the public works project any product of a foreign country on such U.S.T.R. list.

Nothing contained in the foregoing shall be construed to require establishment of a system of records in order to render, in good faith, the certification required by this provision. The knowledge and information of a contractor is not required to exceed that which is normally possessed by a prudent person in the ordinary course of business dealings.

The Offeror agrees that, if awarded a contract resulting from this solicitation, it will incorporate this provision for certification without modification in all lower tier subcontracts. The contractor may rely on the certification of a prospective subcontractor that it is not a firm from a foreign country included on the list of countries that discriminate against U.S. firms as published by U.S.T.R., unless the Offeror has knowledge that the certification is erroneous.

This certification is a material representation of fact upon which reliance was placed when making an award. If it is later determined that the Contractor or subcontractor knowingly rendered an erroneous certification, the Federal Aviation Administration (FAA) may direct through the Owner cancellation of the contract or subcontract for default at no cost to the Owner or the FAA.

d. Certification of Offeror/Bidder Regarding Debarment (2 CFR Part 180 (Subpart C), 2 CFR Part 1200, DOT Order 4200.5)

By submitting a bid/proposal under this solicitation, the Bidder or Offeror certifies that neither it nor its principals are presently debarred or suspended by any Federal department or agency from participation in this transaction.

e. **Certification of Lower Tier Contractors Regarding Debarment (2 CFR Part 180 (Subpart C), 2 CFR Part 1200, DOT Order 4200.5)**
The successful Bidder, by administering each lower tier subcontract that exceeds $25,000 as a "covered transaction", must verify each lower tier participant of a "covered transaction" under the project is not presently debarred or otherwise disqualified from participation in this federally assisted project. The successful bidder will accomplish this by:

1. Checking the System for Award Management at website: http://www.sam.gov;
2. Collecting a certification statement similar to the Certificate of Offeror/Bidder Regarding Debarment and Suspension, above;
3. Inserting a clause or condition in the covered transaction with the lower tier contract.

If the FAA and/or MoDOT later determines that a lower tier participant failed to disclose to a higher tier participant that it was excluded or disqualified at the time it entered the covered transaction, the FAA and/or MoDOT may pursue any available remedies, including suspension and debarment of the non-compliant participant.

f. **Certification Regarding Lobbying (31 U.S.C. § 1352, 2 CFR § 200 Appendix II(J), 49 CFR Part 20, Appendix A)**

The Bidder or Offer certifies by signing and submitting this bid or proposal, to the best of his or her knowledge and belief, that:

1. No Federal appropriated funds have been paid or will be paid, by or on behalf of the Bidder or Offeror, to any person for influencing or attempting to influence an officer or employee of an agency, a Member of Congress, an officer or employer of Congress, or an employee of a Member of Congress in connection with the awarding of any Federal contract, the making of any Federal grant, the making of any Federal loan, the entering into of any cooperative agreement, and the extension, continuation, renewal, amendment, or modification of any Federal contract, grant, loan, or cooperative agreement.

2. If any funds other than Federal appropriated funds have been paid or will be paid to any person for influencing or attempting to influence an officer or employee of any agency, a Member of Congress, an officer or employee of Congress, or an employee of a Member of Congress in connection with this Federal contract, grant, loan, or cooperative agreement, the undersigned shall complete and submit Standard Form-LLL, "Disclosure Form to Report Lobbying," in accordance with its instructions.

3. The undersigned shall require that the language of this certification be included in the award documents for all sub-awards at all tiers (including subcontracts, sub-grants, and contracts under grants, loans, and cooperative agreements) and that all sub-recipients shall certify and disclose accordingly.

This certification is a material representation of fact upon which reliance was placed when this transaction was made or entered into. Submission of this certification is a prerequisite for making or entering into this transaction imposed by Section 1352, Title 31, United States Code. Any person who fails to file the required certification shall be subject to a civil penalty of not less than $10,000 and not more than $100,000 for such failure.

g. **Buy American Certification:** (Title 49 U.S.C. § 50101)
The bidder agrees to comply with 49 U.S.C. § 50101, which provides that Federal funds may not be obligated unless all steel and manufactured goods used in AIP-funded projects are produced in the United States, unless the FAA has issued a waiver for the product; the product is listed as an Excepted Article, Material Or Supply in Federal Acquisition Regulation subpart 25.108; or is included in the FAA Nationwide Buy American Waivers Issued List.

A bidder or offeror must submit the appropriate Buy America certification included herein with their bid or offer. The Owner will reject as nonresponsive any bid or offer that does not include a completed Certificate of Buy American Compliance.

Type of Certification is based on Type of Project:

There are two types of Buy American certifications.

- For projects for a facility, the Certificate of Compliance Based on Total Facility (Terminal or Building Project) must be submitted.
- For all other projects, the Certificate of Compliance Based on Equipment and Materials Used on the Project (Non-building construction projects such as runway or roadway construction; or equipment acquisition projects) must be submitted.

Certificate of Buy American Compliance for Manufactured Products
(Non-building construction projects, equipment acquisition projects)

As a matter of bid responsiveness, the bidder or offeror must complete, sign, date, and submit this certification statement with their proposal. The bidder or offeror must indicate how they intend to comply with 49 USC § 50101 by selecting one of the following certification statements. These statements are mutually exclusive. Bidder must select one or the other (i.e. not both) by inserting a checkmark (√) or the letter "X".

☒ Bidder or offeror hereby certifies that it will comply with 49 USC 50101 by:
a) Only installing steel and manufactured products produced in the United States;
b) Installing manufactured products for which the FAA has issued a waiver as indicated by inclusion on the current FAA Nationwide Buy American Waivers Issued listing; or
c) Installing products listed as an Excepted Article, Material or Supply in Federal Acquisition Regulation Subpart 25.108.

By selecting this certification statement, the bidder or offeror agrees:
1. To provide to the Owner evidence that documents the source and origin of the steel and manufactured product.
2. To faithfully comply with providing U.S. domestic product.
3. To furnish U.S. domestic product for any waiver request that the FAA rejects.
4. To refrain from seeking a waiver request after establishment of the contract, unless extenuating circumstances emerge that the FAA determines justified.

☐ Bidder or offeror hereby certifies it cannot comply with the 100% Buy American Preferences of 49 USC § 50101(a) but may qualify for either a Type 3 or Type 4 waiver under 49 USC § 50101(b). By selecting this certification statement, the apparent bidder or offeror with the apparent low bid agrees:
1. To submit to the Owner within 15 calendar days of the bid opening, a formal waiver request and required documentation that support the type of waiver being requested.
2. That failure to submit the required documentation within the specified timeframe is cause for a non-responsive determination which may result in rejection of the proposal.
3. To faithfully comply with providing U.S. domestic products at or above the approved U.S. domestic content percentage as approved by the FAA.
4. To refrain from seeking a waiver request after establishment of the contract, unless extenuating circumstances emerge that the FAA determines justified.

Required Documentation

Type 3 Waiver – The cost of the item components and subcomponents produced in the United States is more than 60% of the cost of all components and subcomponents of the "item". The required documentation for a Type 3 waiver is:

a) Listing of all product components and subcomponents that are not comprised of 100% U.S. domestic content (excludes products listed on the FAA Nationwide Buy American Waivers Issued listing and products excluded by Federal Acquisition Regulation Subpart 25.108; products of unknown origin must be considered as non-domestic products in their entirety).
b) Cost of non-domestic components and subcomponents, excluding labor costs associated with final assembly at place of manufacture.
c) Percentage of non-domestic component and subcomponent cost as compared to total "item" component and subcomponent costs, excluding labor costs associated with final assembly and at place of manufacture.

Type 4 Waiver – Total cost of project using U.S. domestic source product exceeds the total project cost using non-domestic product by 25%. The required documentation for a Type 4 waiver is:

d) Detailed cost information for total project using U.S. domestic product.
e) Detailed cost information for total project using non-domestic product.

False Statements: Per 49 USC § 47126, this certification concerns a matter within the jurisdiction of the Federal Aviation Administration and the making of a false, fictitious or fraudulent certification may render the maker subject to prosecution under Title 18, United States Code.

3/23/21
Date

Signature

Phillips Hardy Inc
Company Name

President
Title

h. CERTIFICATION OF OFFERER/BIDDER REGARDING TAX DELINQUENCY AND FELONY CONVICTIONS

The bidder must complete the following two certification statements. The bidder must indicate its current status as it relates to tax delinquency and felony conviction by inserting a checkmark (✓) in the space following the applicable response. The bidder agrees that, if awarded a contract resulting from this solicitation, it will incorporate this provision for certification in all lower tier subcontracts.

Certifications

1) The bidder represents that it is not (✓) a corporation that has any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability.

2) The applicant represents that it is not (✓) a corporation that was convicted of a criminal violation under any Federal law within the preceding 24 months.

Note:

If a bidder is unable to certify above, the bidder is ineligible to receive an award unless the sponsor has received notification from the agency suspension and debarment official (SDO) that the SDO has considered suspension or debarment and determined that further action is not required to protect the Government's interests. The bidder therefore must provide information to the owner about its tax liability or conviction to the Owner, who will then notify the FAA Airports District Office, which will then notify the agency's SDO to facilitate completion of the required considerations before award decisions are made.

Term Definitions

Felony conviction: Felony conviction means a conviction within the preceding twenty-four (24) months of a felony criminal violation under any Federal law and includes conviction of an offense defined in a section of the U.S. code that specifically classifies the offense as a felony and conviction of an offense that is classified as a felony under 18 U.S.C. § 3559.

Tax Delinquency: A tax delinquency is any unpaid Federal tax liability that has been assessed, for which all judicial and administrative remedies have been exhausted, or have lapsed, and that is not being paid in a timely manner pursuant to an agreement with the authority responsible for collecting the tax liability.

Certification - The information above is true and complete to the best of my knowledge and belief.

Lee Hardy President

Name and Title of Signer (Please Type)

Signature

3/23/21

Date

1. **Compliance with the Work Authorization Law (as required by Section 285.530, Revised Statues of Missouri)**

For all contracts where the total bid amount is in excess of $50,000 (local match in excess of $5,000), the Bidder, by submission of an offer and by signing the Worker Eligibility Verification Affidavit for All Contract Agreements in Excess of $50,000, certifies that it:

1. does not knowingly employ any person who is an unauthorized alien in connection with the contracted services;

2. has enrolled and actively participates in a federal work authorization program;

A general contractor or subcontractor of any tier shall not be liable under sections 285.525 to 285.550 when such general contractor or subcontractor contracts with its direct subcontractor who violates subsection 1 of this section, if the contract binding the contractor and subcontractor affirmatively states that the direct subcontractor is not knowingly in violation of subsection 1 of this section and shall not henceforth be in such violation and the contractor or subcontractor receives a sworn affidavit under the penalty of perjury attesting to the fact that the direct subcontractor's employees are lawfully present in the United States.

WORKER ELIGIBILITY VERIFICATION AFFIDAVIT FOR ALL CONTRACT AGREEMENTS IN EXCESS OF $50,000 (Local match in excess of $5,000)
(for joint ventures, a separate affidavit is required for each business entity)

STATE OF Missouri)
) ss
COUNTY OF Boone)

On this 22nd day of March, 2021, before me appeared Lee Hardy, personally known to me or proved to me on the basis of satisfactory evidence to be a person whose name is subscribed to this affidavit, who being by me duly sworn, deposed as follows:

My name is Lee Hardy, and I am of sound mind, capable of making this affidavit, and personally certify the facts herein stated, as required by Section 285.530, RSMo, to enter into any contract agreement with the state or any of its political subdivisions to perform any job, task, employment, labor, personal services, or any other activity for which compensation is provided, expected, or due, including but not limited to all activities conducted by business entities:

I am the President (title) of Phillips Hardy Inc (business name), and I am duly authorized, directed, and/or empowered to act officially and properly on behalf of this business entity.

I hereby affirm and warrant that the aforementioned business entity is enrolled in a federal work authorization program operated by the United States Department of Homeland Security, and the aforementioned business entity shall participate in said program to verify information (employment eligibility) of newly hired employees working in connection to work under the within contract agreement. I have attached documentation to this affidavit to evidence enrollment/participation by the aforementioned business entity in a federal work authorization program, as required by Section 285.530, RSMo.

In addition, I hereby affirm and warrant that the aforementioned business entity does not and shall not knowingly employ, in connection to work under the within contract agreement, any alien who does not have the legal right or authorization under federal law to work in the United States, as defined in 8 U.S.C. § 1324a(h)(3).

I am aware and recognize that, unless certain contract and affidavit conditions are satisfied pursuant to Section 285.530, RSMo, the aforementioned business entity may be held liable under Sections 285.525 through 285.550, RSMo, for subcontractors that knowingly employ or continue to employ any unauthorized alien to work within the state of Missouri.

I acknowledge that I am signing this affidavit as a free act and deed of the aforementioned business entity and not under duress.

(Affiant Signature)

Subscribed and sworn to before me this 22nd day of March, 2021.

CHRISTY HOOD
NOTARY PUBLIC, NOTARY SEAL
STATE OF MISSOURI
BOONE COUNTY
COMMISSION # 12417259
MY COMMISSION EXPIRES: NOVEMBER 25, 2024

(Notary Public)

My commission expires: Nov. 25, 2024

Documentation of enrollment/participation in a federal work authorization program is attached. Acceptable enrollment and participation documentation consists of the following two pages of the E-Verify Memorandum of Understanding: (1) A valid, completed copy of the first page identifying the business entity; and (2) A valid copy of the signature page completed and signed by the business entity, the Social Security Administration, and the Department of Homeland Security – Verification Division.

E-Verify
Employment Eligibility Verification

Welcome Denise Day | User ID DDAY1499 | Last Login 01:47 PM - 07/09/2015 | Log Out

Click any ? for help

Home
My Cases
New Case
View Cases
Search Cases
My Profile
Edit Profile
Change Password
Change Security Questions
My Company
Edit Company Profile
Add New User
View Existing Users
Close Company Account
My Reports
View Reports
My Resources
View Essential Resources
Take Tutorial
View User Manual
Share Ideas
Contact Us

Company Information

Company Name:	Phillips Hardy Inc.
Company ID Number:	198436
Doing Business As (DBA) Name:	
DUNS Number:	

View / Edit

Physical Location:

Address 1:	15290 Highway 135
Address 2:	
City:	Boonville
State:	MO
Zip Code:	65233
County:	COOPER

Mailing Address:

Address 1:	
Address 2:	
City:	
State:	
Zip Code:	

Additional Information:

Employer Identification Number:	43169719
Total Number of Employees:	20 to 99
Parent Organization:	
Administrator:	

Organization Designation:

Employer Category:	Federal Contractor with FAR E-Verify Clause
Federal Contractor Category:	None of these categories apply
Employees being verified:	Entire workforce (all new hires and all existing employees throughout the entire company)

NAICS Code:	237 - HEAVY AND CIVIL ENGINEERING CONSTRUCTION	View / Edit
Total Hiring Sites:	1	View / Edit
Total Points of Contact:	4	View / Edit

View MOU

E-Verify™

E-VERIFY IS A SERVICE OF DHS

Company ID Number: 198436

THE E-VERIFY PROGRAM FOR EMPLOYMENT VERIFICATION MEMORANDUM OF UNDERSTANDING

ARTICLE I

PURPOSE AND AUTHORITY

This Memorandum of Understanding (MOU) sets forth the points of agreement between the Department of Homeland Security (DHS) and **Phillips Grading & Construction Inc.** (Employer) regarding the Employer's participation in the Employment Eligibility Verification Program (E-Verify). This MOU explains certain features of the E-Verify program and enumerates specific responsibilities of DHS, the Social Security Administration (SSA), and the Employer. E-Verify is a program that electronically confirms an employee's eligibility to work in the United States after completion of the Employment Eligibility Verification Form (Form I-9). For covered government contractors, E-Verify is used to verify the employment eligibility of all newly hired employees and all existing employees assigned to Federal contracts.

Authority for the E-Verify program is found in Title IV, Subtitle A, of the Illegal Immigration Reform and Immigrant Responsibility Act of 1996 (IIRIRA), Pub. L. 104-208, 110 Stat. 3009, as amended (8 U.S.C. § 1324a note). Authority for use of the E-Verify program by Federal contractors and subcontractors covered by the terms of Subpart 22.18, "Employment Eligibility Verification", of the Federal Acquisition Regulation (FAR) (hereinafter referred to in this MOU as a "Federal contractor") to verify the employment eligibility of certain employees working on Federal contracts is also found in Subpart 22.18 and in Executive Order 12989, as amended.

ARTICLE II

FUNCTIONS TO BE PERFORMED

A. RESPONSIBILITIES OF SSA

1. SSA agrees to provide the Employer with available information that allows the Employer to confirm the accuracy of Social Security Numbers provided by all employees verified under this MOU and the employment authorization of U.S. citizens.

2. SSA agrees to provide to the Employer appropriate assistance with operational problems that may arise during the Employer's participation in the E-Verify program. SSA agrees to provide the Employer with names, titles, addresses, and telephone numbers of SSA representatives to be contacted during the E-Verify process.

3. SSA agrees to safeguard the information provided by the Employer through the E-Verify program procedures, and to limit access to such information, as is appropriate by law, to individuals responsible for the verification of Social Security Numbers and for evaluation of the E-Verify program or such other persons or entities who may be authorized by SSA as governed by the Privacy Act (5 U.S.C. § 552a), the Social Security Act (42 U.S.C. 1306(a)), and SSA regulations (20 CFR Part 401).

4. SSA agrees to provide a means of automated verification that is designed (in conjunction with DHS's automated system if necessary) to provide confirmation or tentative nonconfirmation of U.S. citizens' employment eligibility within 3 Federal Government work days of the initial inquiry.

5. SSA agrees to provide a means of secondary verification (including updating SSA records as may be necessary) for employees who contest SSA tentative nonconfirmations that is designed to provide final confirmation or nonconfirmation of U.S. citizens' employment eligibility and accuracy of SSA records for both citizens and aliens within 10 Federal Government work days of the date of referral to SSA, unless SSA determines that more than 10 days may be necessary. In such cases, SSA will provide additional verification instructions.

B. RESPONSIBILITIES OF DHS

1. After SSA verifies the accuracy of SSA records for aliens through E-Verify, DHS agrees to provide the Employer access to selected data from DHS's database to enable the Employer to conduct, to the extent authorized by this MOU:

- Automated verification checks on alien employees by electronic means, and
- Photo verification checks (when available) on employees.

2. DHS agrees to provide to the Employer appropriate assistance with operational problems that may arise during the Employer's participation in the E-Verify program. DHS agrees to provide the Employer names, titles, addresses, and telephone numbers of DHS representatives to be contacted during the E-Verify process.

3. DHS agrees to provide to the Employer a manual (the E-Verify User Manual) containing instructions on E-Verify policies, procedures and requirements for both SSA and DHS, including restrictions on the use of E-Verify. DHS agrees to provide training materials on E-Verify.

4. DHS agrees to provide to the Employer a notice, which indicates the Employer's participation in the E-Verify program. DHS also agrees to provide to the Employer anti-discrimination notices issued by the Office of Special Counsel for Immigration-Related Unfair Employment Practices (OSC), Civil Rights Division, U.S. Department of Justice.

5. DHS agrees to issue the Employer a user identification number and password that permits the Employer to verify information provided by alien employees with DHS's database.

6. DHS agrees to safeguard the information provided to DHS by the Employer, and to limit access to such information to individuals responsible for the verification of alien employment eligibility and for evaluation of the E-Verify program, or to such other persons or entities as may be authorized by applicable law. Information will be used only to verify the accuracy of Social Security Numbers and employment eligibility, to enforce the Immigration and Nationality Act (INA) and Federal criminal laws, and to administer Federal contracting requirements.

7. DHS agrees to provide a means of automated verification that is designed (in conjunction with SSA verification procedures) to provide confirmation or tentative

nonconfirmation of employees' employment eligibility within 3 Federal Government work days of the initial inquiry.

8. DHS agrees to provide a means of secondary verification (including updating DHS records as may be necessary) for employees who contest DHS tentative nonconfirmations and photo non-match tentative nonconfirmations that is designed to provide final confirmation or nonconfirmation of the employees' employment eligibility within 10 Federal Government work days of the date of referral to DHS, unless DHS determines that more than 10 days may be necessary. In such cases, DHS will provide additional verification instructions.

C. RESPONSIBILITIES OF THE EMPLOYER

1. The Employer agrees to display the notices supplied by DHS in a prominent place that is clearly visible to prospective employees and all employees who are to be verified through the system.

2. The Employer agrees to provide to the SSA and DHS the names, titles, addresses, and telephone numbers of the Employer representatives to be contacted regarding E-Verify.

3. The Employer agrees to become familiar with and comply with the most recent version of the E-Verify User Manual.

4. The Employer agrees that any Employer Representative who will perform employment verification queries will complete the E-Verify Tutorial before that individual initiates any queries.

   A. The Employer agrees that all Employer representatives will take the refresher tutorials initiated by the E-Verify program as a condition of continued use of E-Verify, including any tutorials for Federal contractors if the Employer is a Federal contractor.

   B. Failure to complete a refresher tutorial will prevent the Employer from continued use of the program.

5. The Employer agrees to comply with current Form I-9 procedures, with two exceptions:

- If an employee presents a "List B" identity document, the Employer agrees to only accept "List B" documents that contain a photo. (List B documents identified in 8 C.F.R. § 274a.2(b)(1)(B)) can be presented during the Form I-9 process to establish identity.) If an employee objects to the photo requirement for religious reasons, the Employer should contact E-Verify at 888-464-4218.
- If an employee presents a DHS Form I-551 (Permanent Resident Card) or Form I-766 (Employment Authorization Document) to complete the Form I-9, the Employer agrees to make a photocopy of the document and to retain the photocopy with the employee's Form I-9. The employer will use the photocopy to verify the photo and to assist DHS with its review of photo non-matches that are contested by employees. Note that employees retain the right to present any List A, or List B and List C, documentation to complete the Form I-9. DHS may in the future designate other documents that activate the photo screening tool.

6. The Employer understands that participation in E-Verify does not exempt the Employer from the responsibility to complete, retain, and make available for inspection Forms I-9 that relate to its employees, or from other requirements of applicable regulations or laws, including the obligation to comply with the antidiscrimination requirements of section 274B of the INA with respect to Form I-9 procedures, except for the following modified requirements applicable by reason of the Employer's participation in E-Verify: (1) identity documents must have photos, as described in paragraph 5 above; (2) a rebuttable presumption is established that the Employer has not violated section 274A(a)(1)(A) of the Immigration and Nationality Act (INA) with respect to the hiring of any individual if it obtains confirmation of the identity and employment eligibility of the individual in compliance with the terms and conditions of E-Verify; (3) the Employer must notify DHS if it continues to employ any employee after receiving a final nonconfirmation, and is subject to a civil money penalty between $550 and $1,100 for each failure to notify DHS of continued employment following a final nonconfirmation; (4) the Employer is subject to a rebuttable presumption that it has knowingly employed an unauthorized alien in violation of section 274A(a)(1)(A) if the Employer continues to employ an employee after receiving a final nonconfirmation; and (5) no person or entity participating in E-Verify is civilly or criminally liable under any law for any action taken in good faith based on information provided through the confirmation system. DHS reserves the right to conduct Form I-9 compliance inspections during the course of E-Verify, as well as to conduct any other enforcement activity authorized by law.

7. The Employer agrees to initiate E-Verify verification procedures for new employees within 3 Employer business days after each employee has been hired (but after both sections 1 and 2 of the Form I-9 have been completed), and to complete as many (but only as many) steps of the E-Verify process as are necessary according to the E-Verify User Manual. The Employer is prohibited from initiating verification procedures before the employee has been hired and the Form I-9 completed. If the automated system to be queried is temporarily unavailable, the 3-day time period is extended until it is again operational in order to accommodate the Employer's attempting, in good faith, to make inquiries during the period of unavailability. In all cases, the Employer must use the SSA verification procedures first, and use DHS verification procedures and photo screening tool only after the SSA verification response has been given. Employers may initiate verification by notating the Form I-9 in circumstances where the employee has applied for a Social Security Number (SSN) from the SSA and is waiting to receive the SSN, provided that the Employer performs an E-Verify employment verification query using the employee's SSN as soon as the SSN becomes available.

8. The Employer agrees not to use E-Verify procedures for pre-employment screening of job applicants, in support of any unlawful employment practice, or for any other use not authorized by this MOU. Employers must use E-Verify for all new employees, unless an Employer is a Federal contractor that qualifies for the exceptions described in Article II.D.1.c. Except as provided in Article II.D, the Employer will not verify selectively and will not verify employees hired before the effective date of this MOU. The Employer understands that if the Employer uses E-Verify procedures for any purpose other than as authorized by this MOU, the Employer may be subject to appropriate legal action and termination of its access to SSA and DHS information pursuant to this MOU.

9. The Employer agrees to follow appropriate procedures (see Article III. below) regarding tentative nonconfirmations, including notifying employees of the finding, providing written referral instructions to employees, allowing employees to contest the finding, and not taking

adverse action against employees if they choose to contest the finding. Further, when employees contest a tentative nonconfirmation based upon a photo non-match, the Employer is required to take affirmative steps (see Article III.B. below) to contact DHS with information necessary to resolve the challenge.

10. The Employer agrees not to take any adverse action against an employee based upon the employee's perceived employment eligibility status while SSA or DHS is processing the verification request unless the Employer obtains knowledge (as defined in 8 C.F.R. § 274a.1(l)) that the employee is not work authorized. The Employer understands that an initial inability of the SSA or DHS automated verification system to verify work authorization, a tentative nonconfirmation, a case in continuance (indicating the need for additional time for the government to resolve a case), or the finding of a photo non-match, does not establish, and should not be interpreted as evidence, that the employee is not work authorized. In any of the cases listed above, the employee must be provided a full and fair opportunity to contest the finding, and if he or she does so, the employee may not be terminated or suffer any adverse employment consequences based upon the employee's perceived employment eligibility status (including denying, reducing, or extending work hours, delaying or preventing training, requiring an employee to work in poorer conditions, refusing to assign the employee to a Federal contract or other assignment, or otherwise subjecting an employee to any assumption that he or she is unauthorized to work) until and unless secondary verification by SSA or DHS has been completed and a final nonconfirmation has been issued. If the employee does not choose to contest a tentative nonconfirmation or a photo non-match or if a secondary verification is completed and a final nonconfirmation is issued, then the Employer can find the employee is not work authorized and terminate the employee's employment. Employers or employees with questions about a final nonconfirmation may call E-Verify at 1-888-464-4218 or OSC at 1-800-255-8155 or 1-800-237-2515 (TDD).

11. The Employer agrees to comply with Title VII of the Civil Rights Act of 1964 and section 274B of the INA by not discriminating unlawfully against any individual in hiring, firing, or recruitment or referral practices because of his or her national origin or, in the case of a protected individual as defined in section 274B(a)(3) of the INA, because of his or her citizenship status. The Employer understands that such illegal practices can include selective verification or use of E-Verify except as provided in part D below, or discharging or refusing to hire employees because they appear or sound "foreign" or have received tentative nonconfirmations. The Employer further understands that any violation of the unfair immigration-related employment practices provisions in section 274B of the INA could subject the Employer to civil penalties, back pay awards, and other sanctions, and violations of Title VII could subject the Employer to back pay awards, compensatory and punitive damages. Violations of either section 274B of the INA or Title VII may also lead to the termination of its participation in E-Verify. If the Employer has any questions relating to the anti-discrimination provision, it should contact OSC at 1-800-255-8155 or 1-800-237-2515 (TDD).

12. The Employer agrees to record the case verification number on the employee's Form I-9 or to print the screen containing the case verification number and attach it to the employee's Form I-9.

13. The Employer agrees that it will use the information it receives from SSA or DHS pursuant to E-Verify and this MOU only to confirm the employment eligibility of employees as

authorized by this MOU. The Employer agrees that it will safeguard this information, and means of access to it (such as PINS and passwords) to ensure that it is not used for any other purpose and as necessary to protect its confidentiality, including ensuring that it is not disseminated to any person other than employees of the Employer who are authorized to perform the Employer's responsibilities under this MOU, except for such dissemination as may be authorized in advance by SSA or DHS for legitimate purposes.

14. The Employer acknowledges that the information which it receives from SSA is governed by the Privacy Act (5 U.S.C. § 552a(i)(1) and (3)) and the Social Security Act (42 U.S.C. 1306(a)), and that any person who obtains this information under false pretenses or uses it for any purpose other than as provided for in this MOU may be subject to criminal penalties.

15. The Employer agrees to cooperate with DHS and SSA in their compliance monitoring and evaluation of E-Verify, including by permitting DHS and SSA, upon reasonable notice, to review Forms I-9 and other employment records and to interview it and its employees regarding the Employer's use of E-Verify, and to respond in a timely and accurate manner to DHS requests for information relating to their participation in E-Verify.

D. RESPONSIBILITIES OF FEDERAL CONTRACTORS

1. The Employer understands that if it is a Federal contractor subject to the employment verification terms in Subpart 22.18 of the FAR it must verify the employment eligibility of any "employee assigned to the contract" (as defined in FAR 22.1801) in addition to verifying the employment eligibility of all other employees required to be verified under the FAR. Once an employee has been verified through E-Verify by the Employer, the Employer may not reverify the employee through E-Verify.

a. Federal contractors not enrolled at the time of contract award: An Employer that is not enrolled in E-Verify as a Federal contractor at the time of a contract award must enroll as a Federal contractor in the E-Verify program within 30 calendar days of contract award and, within 90 days of enrollment, begin to use E-Verify to initiate verification of employment eligibility of new hires of the Employer who are working in the United States, whether or not assigned to the contract. Once the Employer begins verifying new hires, such verification of new hires must be initiated within 3 business days after the date of hire. Once enrolled in E-Verify as a Federal contractor, the Employer must initiate verification of employees assigned to the contract within 90 calendar days after the date of enrollment or within 30 days of an employee's assignment to the contract, whichever date is later.

b. Federal contractors already enrolled at the time of a contract award: Employers enrolled in E-Verify as a Federal contractor for 90 days or more at the time of a contract award must use E-Verify to initiate verification of employment eligibility for new hires of the Employer who are working in the United States, whether or not assigned to the contract, within 3 business days after the date of hire. If the Employer is enrolled in E-Verify as a Federal contractor for 90 calendar days or less at the time of contract award, the Employer must, within 90 days of enrollment, begin to use E-Verify to initiate verification of new hires of the contractor who are working in the United States, whether or not assigned to the contract. Such verification of new hires must be initiated within 3 business days after the date of hire. An Employer enrolled as a Federal contractor in E-Verify must initiate verification of each employee assigned to the

contract within 90 calendar days after date of contract award or within 30 days after assignment to the contract, whichever is later.

c. Institutions of higher education, State, local and tribal governments and sureties: Federal contractors that are institutions of higher education (as defined at 20 U.S.C. 1001(a)), State or local governments, governments of Federally recognized Indian tribes, or sureties performing under a takeover agreement entered into with a Federal agency pursuant to a performance bond may choose to only verify new and existing employees assigned to the Federal contract. Such Federal contractors may, however, elect to verify all new hires, and/or all existing employees hired after November 6, 1986. The provisions of Article II.D, paragraphs 1.a and 1.b of this MOU providing timeframes for initiating employment verification of employees assigned to a contract apply to such institutions of higher education, State, local and tribal governments, and sureties.

d. Verification of all employees: Upon enrollment, Employers who are Federal contractors may elect to verify employment eligibility of all existing employees working in the United States who were hired after November 6, 1986, instead of verifying only those employees assigned to a covered Federal contract. After enrollment, Employers must elect to do so only in the manner designated by DHS and initiate E-Verify verification of all existing employees within 180 days after the election.

e. Form I-9 procedures for Federal contractors: The Employer may use a previously completed Form I-9 as the basis for initiating E-Verify verification of an employee assigned to a contract as long as that Form I-9 is complete (including the SSN), complies with Article II.C.5, the employee's work authorization has not expired, and the Employer has reviewed the information reflected in the Form I-9 either in person or in communications with the employee to ensure that the employee's stated basis in section 1 of the Form I-9 for work authorization has not changed (including, but not limited to, a lawful permanent resident alien having become a naturalized U.S. citizen). If the Employer is unable to determine that the Form I-9 complies with Article II.C.5, if the employee's basis for work authorization as attested in section 1 has expired or changed, or if the Form I-9 contains no SSN or is otherwise incomplete, the Employer shall complete a new I-9 consistent with Article II.C.5, or update the previous I-9 to provide the necessary information. If section 1 of the Form I-9 is otherwise valid and up-to-date and the form otherwise complies with Article II.C.5, but reflects documentation (such as a U.S. passport or Form I-551) that expired subsequent to completion of the Form I-9, the Employer shall not require the production of additional documentation, or use the photo screening tool described in Article II.C.5, subject to any additional or superseding instructions that may be provided on this subject in the E-Verify User Manual. Nothing in this section shall be construed to require a second verification using E-Verify of any assigned employee who has previously been verified as a newly hired employee under this MOU, or to authorize verification of any existing employee by any Employer that is not a Federal contractor.

2. The Employer understands that if it is a Federal contractor, its compliance with this MOU is a performance requirement under the terms of the Federal contract or subcontract, and the Employer consents to the release of information relating to compliance with its verification responsibilities under this MOU to contracting officers or other officials authorized to review the Employer's compliance with Federal contracting requirements.

ARTICLE III

REFERRAL OF INDIVIDUALS TO SSA AND DHS

A. REFERRAL TO SSA

1. If the Employer receives a tentative nonconfirmation issued by SSA, the Employer must print the tentative nonconfirmation notice as directed by the automated system and provide it to the employee so that the employee may determine whether he or she will contest the tentative nonconfirmation.

2. The Employer will refer employees to SSA field offices only as directed by the automated system based on a tentative nonconfirmation, and only after the Employer records the case verification number, reviews the input to detect any transaction errors, and determines that the employee contests the tentative nonconfirmation. The Employer will transmit the Social Security Number to SSA for verification again if this review indicates a need to do so. The Employer will determine whether the employee contests the tentative nonconfirmation as soon as possible after the Employer receives it.

3. If the employee contests an SSA tentative nonconfirmation, the Employer will provide the employee with a system-generated referral letter and instruct the employee to visit an SSA office within 8 Federal Government work days. SSA will electronically transmit the result of the referral to the Employer within 10 Federal Government work days of the referral unless it determines that more than 10 days is necessary. The Employer agrees to check the E-Verify system regularly for case updates.

4. The Employer agrees not to ask the employee to obtain a printout from the Social Security Number database (the Numident) or other written verification of the Social Security Number from the SSA.

B. REFERRAL TO DHS

1. If the Employer receives a tentative nonconfirmation issued by DHS, the Employer must print the tentative nonconfirmation notice as directed by the automated system and provide it to the employee so that the employee may determine whether he or she will contest the tentative nonconfirmation.

2. If the Employer finds a photo non-match for an employee who provides a document for which the automated system has transmitted a photo, the employer must print the photo non-match tentative nonconfirmation notice as directed by the automated system and provide it to the employee so that the employee may determine whether he or she will contest the finding.

3. The Employer agrees to refer individuals to DHS only when the employee chooses to contest a tentative nonconfirmation received from DHS automated verification process or when the Employer issues a tentative nonconfirmation based upon a photo non-match. The Employer will determine whether the employee contests the tentative nonconfirmation as soon as possible

after the Employer receives it.

4. If the employee contests a tentative nonconfirmation issued by DHS, the Employer will provide the employee with a referral letter and instruct the employee to contact DHS through its toll-free hotline (as found on the referral letter) within 8 Federal Government work days.

5. If the employee contests a tentative nonconfirmation based upon a photo non-match, the Employer will provide the employee with a referral letter to DHS. DHS will electronically transmit the result of the referral to the Employer within 10 Federal Government work days of the referral unless it determines that more than 10 days is necessary. The Employer agrees to check the E-Verify system regularly for case updates.

6. The Employer agrees that if an employee contests a tentative nonconfirmation based upon a photo non-match, the Employer will send a copy of the employee's Form I-551 or Form I-766 to DHS for review by:

- Scanning and uploading the document, or
- Sending a photocopy of the document by an express mail account (furnished and paid for by DHS).

7. The Employer understands that if it cannot determine whether there is a photo match/non-match, the Employer is required to forward the employee's documentation to DHS by scanning and uploading, or by sending the document as described in the preceding paragraph, and resolving the case as specified by the Immigration Services Verifier at DHS who will determine the photo match or non-match.

ARTICLE IV

SERVICE PROVISIONS

SSA and DHS will not charge the Employer for verification services performed under this MOU. The Employer is responsible for providing equipment needed to make inquiries. To access the E-Verify System, an Employer will need a personal computer with Internet access.

ARTICLE V

PARTIES

A. This MOU is effective upon the signature of all parties, and shall continue in effect for as long as the SSA and DHS conduct the E-Verify program unless modified in writing by the mutual consent of all parties, or terminated by any party upon 30 days prior written notice to the others. Any and all system enhancements to the E-Verify program by DHS or SSA, including but not limited to the E-Verify checking against additional data sources and instituting new verification procedures, will be covered under this MOU and will not cause the need for a supplemental MOU that outlines these changes. DHS agrees to train employers on all changes made to E-Verify through the use of mandatory refresher tutorials and updates to the E-Verify User Manual. Even without changes to E-Verify, DHS reserves the right to require employers to take

mandatory refresher tutorials. An Employer that is a Federal contractor may terminate this MOU when the Federal contract that requires its participation in E-Verify is terminated or completed. In such a circumstance, the Federal contractor must provide written notice to DHS. If an Employer that is a Federal contractor fails to provide such notice, that Employer will remain a participant in the E-Verify program, will remain bound by the terms of this MOU that apply to non-Federal contractor participants, and will be required to use the E-Verify procedures to verify the employment eligibility of all newly hired employees.

B. Notwithstanding Article V, part A of this MOU, DHS may terminate this MOU if deemed necessary because of the requirements of law or policy, or upon a determination by SSA or DHS that there has been a breach of system integrity or security by the Employer, or a failure on the part of the Employer to comply with established procedures or legal requirements. The Employer understands that if it is a Federal contractor, termination of this MOU by any party for any reason may negatively affect its performance of its contractual responsibilities.

C. Some or all SSA and DHS responsibilities under this MOU may be performed by contractor(s), and SSA and DHS may adjust verification responsibilities between each other as they may determine necessary. By separate agreement with DHS, SSA has agreed to perform its responsibilities as described in this MOU.

D. Nothing in this MOU is intended, or should be construed, to create any right or benefit, substantive or procedural, enforceable at law by any third party against the United States, its agencies, officers, or employees, or against the Employer, its agents, officers, or employees.

E. Each party shall be solely responsible for defending any claim or action against it arising out of or related to E-Verify or this MOU, whether civil or criminal, and for any liability wherefrom, including (but not limited to) any dispute between the Employer and any other person or entity regarding the applicability of Section 403(d) of IIRIRA to any action taken or allegedly taken by the Employer.

F. The Employer understands that the fact of its participation in E-Verify is not confidential information and may be disclosed as authorized or required by law and DHS or SSA policy, including but not limited to, Congressional oversight, E-Verify publicity and media inquiries, determinations of compliance with Federal contractual requirements, and responses to inquiries under the Freedom of Information Act (FOIA).

G. The foregoing constitutes the full agreement on this subject between DHS and the Employer.

H. The individuals whose signatures appear below represent that they are authorized to enter into this MOU on behalf of the Employer and DHS respectively.

E-Verify

Company ID Number: 198436

To be accepted as a participant in E-Verify, you should only sign the Employer's Section of the signature page. If you have any questions, contact E-Verify at 888-464-4218.

Employer Phillips Grading & Construction Inc.

Kathy Phillips	
Name (Please Type or Print)	Title
Electronically Signed	03/16/2009
Signature	Date

Department of Homeland Security – Verification Division

USCIS Verification Division	
Name (Please Type or Print)	Title
Electronically Signed	03/16/2009
Signature	Date

E-Verify

E-VERIFY IS A SERVICE OF DHS

Company ID Number: 198436

Information Required for the E-Verify Program

Information relating to your Company:

Company Name: Phillips Grading & Construction Inc.

Company Facility Address: 15290 Highway 135

Boonville, MO 65233

Company Alternate Address:

County or Parish: COOPER

Employer Identification Number: 43169719

North American Industry Classification Systems Code: 237

Parent Company:

Number of Employees: 20 to 99

Number of Sites Verified for: 1

Are you verifying for more than 1 site? If yes, please provide the number of sites verified for in each State:

- MISSOURI 1 site(s)

E-Verify™

E-VERIFY IS A SERVICE OF DHS

Company ID Number: 198436

Information relating to the Program Administrator(s) for your Company on policy questions or operational problems:

Name:	**Denise Day**		
Telephone Number:	**(660) 834 - 3030**	Fax Number:	**(660) 834 - 3032**
E-mail Address:	**dday@phillipsgrading.com**		
Name:	**Kathy Phillips**		
Telephone Number:	**(660) 834 - 3030**	Fax Number:	**(660) 834 - 3202**
E-mail Address:	**kphillips@phillipsgrading.com**		
Name:	**Jennifer Krumm**		
Telephone Number:	**(660) 834 - 3030**	Fax Number:	**(660) 834 - 3032**
E-mail Address:	**jenniferkrumm@phillipsgrading.com**		
Name:			
Telephone Number:		Fax Number:	
E-mail Address:			

DISADVANTAGED BUSINESS ENTERPRISE (DBE) PARTICIPATION

The information shown in this section must be completed when a DBE contract goal has been established. The percentage must equal or exceed the DBE contract goal. If the percentage is below the contract goal, then the bidder must submit complete written documentation of good faith efforts taken to meet the DBE contract goal.

a. The undersigned submits the following list of DBEs to be used in accomplishing the work of this contract. The work, supplies or services, applicable value and percent of total federal contract each DBE is to perform or furnish is as follows:

b. Joint venture with a DBE. The undersigned submits the following list of bid items the DBE prime is responsible for and any items that will be subcontracted out are noted with an asterisk or a similar notation. The work, applicable value and percentage of total federal contract the DBE prime is responsible for are as follows:

(A) DBE Name and Address	(B) Bid Item Number(s) Or Work Performed	(C) Dollar Value of DBE Work **	(D) Percent Applicable to DBE Goal (100%, 60%)	(E) Dollar Amount Applicable to DBE Goal (C x D)	(F) Percent of Total Contract (C / Total Contract Amount)
Tromar Contracting Inc 3051 Mercantile Industrial Dr St. Charles MO 63301	1 9 17	10,050.00 4,280.00 19,600.00	100%	33,930.00	4.47%
Schrimpf Landscaping Inc 2820 Brush Creek Ct Jefferson City MO 65110	6 7 20 21	2,800.00 1,000.00 7,700.00 12,201.60	100%	24,301.60	3.20%
TOTAL DBE PARTICIPATION				$58,231.60	7.67 %

**Cannot exceed contract amount for given item of work.
Trucking services credited at 100% if the DBE owns the trucks or is leasing from a DBE firm.
Merchant wholesalers (supply) are credited at 60%.
Brokered services will only receive credit for fees.

(Please reproduce the above sheet if additional space is needed.)

THIS EXECUTED PROPOSAL FORM MUST BE SUBMITTED IN ACCORDANCE WITH THE PROJECT MANUAL.

SIGNATURE OF BIDDER

The undersigned states that the correct LEGAL NAME AND ADDRESS of (1) the individual bidder, (2) each partner or joint venturer (whether individuals or corporations, and whether doing business under a fictitious name), or (3) the corporation (with the state in which it is incorporated) are shown below; that (if not signing with the intention to bind themselves to become responsible and sole bidder) they are the agent of, and they are signing and executing this (as indicated in the proper spaces below) as the bid of a

( ) sole individual ( ) partnership ( ) joint venture

(X) corporation, incorporated under the laws of state of Missouri.

Executed by bidder this 23rd day of March 2021.

Name of individual, all partners or joint venturers:	Address of each:

doing business under the name of:	Address of principal place of business in Missouri:
(If using a fictitious name, show this name above in addition to legal names)	
Phillips Hardy Inc. (If a corporation, show its name above)	2601 Bernadette Pl Columbia, MO 65203
ATTEST: (SEAL) Christy Flood (Signature) Secretary	(Signature) (Title)
Christy Flood Please print name	Lee Hardy Please print name

NOTE: If bidder is doing business under a fictitious name, the bid shall be executed in the legal name of the individual partners, joint ventures, or corporation, with the legal address shown, and registration of fictitious name filed with the secretary of state, as required by sections 417.200 to 417.230 RSMo. If the bidder is a corporation not organized under the laws of Missouri, it shall procure a certificate of authority to do business in Missouri, as required by section 351.572 et seq RSMo.

1. BID DEFAULT

Default of Bidder shall occur upon the failure of Bidder to deliver within the time required by the Bidding Documents (or any extension thereof agreed to in writing by Owner) the executed Contract required by the Bidding Documents and any performance and payment bonds required by the Bidding Documents.

This obligation shall be null and void if:

1.1. Owner accepts Bidder's Bid and Bidder delivers within the time required by the Bidding Documents (or any extension thereof agreed to in writing by Owner) the executed Contract required by the Bidding Documents and any performance and payment bonds required by the Bidding Documents, or

1.2. All Bids are rejected by Owner, or

1.3. Owner fails to issue a Notice of Award to Bidder within the time specified in the Bidding Documents (or any extension thereof agreed to in writing by Bidder and consented to by Surety).

2. BOND PAYMENT DUE

Payment under this Bond will be due and payable upon default of Bidder and within 30 calendar days after receipt by Bidder and Surety of written notice of default from Owner, which notice will be given with reasonable promptness, identifying this Bond and the Project and including a statement of the amount due.

3. PROCEEDING REQUIREMENTS

Surety waives notice of any and all defenses based on or arising out of any time extension to issue Notice of Award agreed to in writing by Owner and Bidder, provided that the total time for issuing Notice of Award including extensions shall not in the aggregate exceed the time required by the Bidding Documents without Surety's written consent.

No suit or action shall be commenced under this Bond prior to 30 calendar days after the notice of default is received by Bidder and Surety and in no case later than one year after the Bid due date. Any suit or action under this Bond shall be commenced only in a court of competent jurisdiction located in the state in which the Project is located.

4. STATUTORY REQUIREMENTS

This Bond is intended to conform to all applicable statutory requirements. Any applicable requirement of any applicable statute that has been omitted from this Bond shall be deemed to be included herein as if set forth at length. If any provision of this Bond conflicts with any applicable statute, then the provision of said statute shall govern and the remainder of this Bond that is not in conflict therewith shall continue in full force and effect.

Liberty Mutual

Interchange Corporate Center
450 Plymouth Road, Suite 400
Plymouth Meeting, PA. 19462-1644
Ph. (610) 832-8240

BID BOND

Bond Number: Bid Bond

KNOW ALL MEN BY THESE PRESENTS, that we Phillips Hardy, Inc.
15290 Highway 135, Boonville, MO 65233, as principal (the "Principal"), and LIBERTY MUTUAL INSURANCE COMPANY, a Massachusetts stock insurance company, as surety (the "Surety"), are held and firmly bound unto City of Clinton, Missouri - Clinton Regional Airport
Clinton City Hall, 105 E. Ohio, Clinton, MO 64735, as obligee (the "Obligee"), in the penal sum of ----- Five Percent of Price Bid -----
Dollars ($ 5%), for the payment of which sum well and truly to be made, the said Principal and the said Surety, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal has submitted a bid for State Block Grant Project No. 19-022A-1/Quest Project No. 7625172
Clinton Regional Airport: Construct the New General Aviation Apron Pavement

NOW, THEREFORE, if the Obligee shall accept the bid of the Principal within the period specified therein, or, if no period be specified, within sixty (60) days after opening, and the Principal shall enter into a contract with the Obligee in accordance with the terms of such bid, and give such bond or bonds as may be specified in the bidding or contract documents, or in the event of the failure of the Principal to enter into such contract and give such bond or bonds, if the Principal shall pay to the Obligee the difference in money not to exceed the penal sum hereof between the amount specified in said bid and such larger amount for which the Obligee may in good faith contract with another party to perform the work covered by said bid, then this obligation shall be null and void; otherwise to remain in full force and effect. In no event shall the liability hereunder exceed the penal sum thereof.

PROVIDED AND SUBJECT TO THE CONDITION PRECEDENT, that any claim by Obligee under this bond must be submitted in writing by registered mail, to the attention of the Surety Law Department at the address above, within 120 days of the date of this bond. Any suit under this bond must be instituted before the expiration of one (1) year from the date of this bond. If the provisions of this paragraph are void or prohibited by law, the minimum period of limitation available to sureties as a defense in the jurisdiction of the suit shall apply.

DATED as of this 22nd day of March, 20 21.

WITNESS / ATTEST

Phillips Hardy, Inc.
(Principal)
By: _____ (Seal)
Name:
Title:

LIBERTY MUTUAL INSURANCE COMPANY
(Surety)
By: Teresa Stephenson (Seal)
Teresa Stephenson Attorney-in-Fact

This Power of Attorney limits the acts of those named herein, and they have no authority to bind the Company except in the manner and to the extent herein stated.

Liberty Mutual Insurance Company
The Ohio Casualty Insurance Company
West American Insurance Company

Certificate No: 8204194-674010

POWER OF ATTORNEY

KNOWN ALL PERSONS BY THESE PRESENTS: That The Ohio Casualty Insurance Company is a corporation duly organized under the laws of the State of New Hampshire, that Liberty Mutual Insurance Company is a corporation duly organized under the laws of the State of Massachusetts, and West American Insurance Company is a corporation duly organized under the laws of the State of Indiana (herein collectively called the "Companies"), pursuant to and by authority herein set forth, does hereby name, constitute and appoint, Barb Henderson, Bethany Eaton, Cheryl Schaffer, Eric Kaup, Richard L. Naught, Teresa M. Stephenson, Thomas S. Naught, Timothy P. Easton, Tracie Zacha

all of the city of Columbia state of MO each individually if there be more than one named, its true and lawful attorney-in-fact to make, execute, seal, acknowledge and deliver, for and on its behalf as surety and as its act and deed, any and all undertakings, bonds, recognizances and other surety obligations, in pursuance of these presents and shall be as binding upon the Companies as if they have been duly signed by the president and attested by the secretary of the Companies in their own proper persons.

IN WITNESS WHEREOF, this Power of Attorney has been subscribed by an authorized officer or official of the Companies and the corporate seals of the Companies have been affixed thereto this 1st day of September, 2020.

Liberty Mutual Insurance Company
The Ohio Casualty Insurance Company
West American Insurance Company

By: _____
David M. Carey, Assistant Secretary

State of PENNSYLVANIA
County of MONTGOMERY ss

On this 1st day of September, 2020 before me personally appeared David M. Carey, who acknowledged himself to be the Assistant Secretary of Liberty Mutual Insurance Company, The Ohio Casualty Company, and West American Insurance Company, and that he, as such, being authorized so to do, execute the foregoing instrument for the purposes therein contained by signing on behalf of the corporations by himself as a duly authorized officer.

IN WITNESS WHEREOF, I have hereunto subscribed my name and affixed my notarial seal at King of Prussia, Pennsylvania, on the day and year first above written.

COMMONWEALTH OF PENNSYLVANIA
Notarial Seal
Teresa Pastella, Notary Public
Upper Merion Twp., Montgomery County
My Commission Expires March 28, 2021
Member, Pennsylvania Association of Notaries

By: _____
Teresa Pastella, Notary Public

This Power of Attorney is made and executed pursuant to and by authority of the following By-laws and Authorizations of The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company which resolutions are now in full force and effect reading as follows:

ARTICLE IV – OFFICERS: Section 12. Power of Attorney.
Any officer or other official of the Corporation authorized for that purpose in writing by the Chairman or the President, and subject to such limitation as the Chairman or the President may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Corporation to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact, subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Corporation by their signature and execution of any such instruments and to attach thereto the seal of the Corporation. When so executed, such instruments shall be as binding as if signed by the President and attested to by the Secretary. Any power or authority granted to any representative or attorney-in-fact under the provisions of this article may be revoked at any time by the Board, the Chairman, the President or by the officer or officers granting such power or authority.

ARTICLE XIII – Execution of Contracts: Section 5. Surety Bonds and Undertakings.
Any officer of the Company authorized for that purpose in writing by the chairman or the president, and subject to such limitations as the chairman or the president may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Company by their signature and execution of any such instruments and to attach thereto the seal of the Company. When so executed such instruments shall be as binding as if signed by the president and attested by the secretary.

Certificate of Designation – The President of the Company, acting pursuant to the Bylaws of the Company, authorizes David M. Carey, Assistant Secretary to appoint such attorneys-in-fact as may be necessary to act on behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations.

Authorization – By unanimous consent of the Company's Board of Directors, the Company consents that facsimile or mechanically reproduced signature of any assistant secretary of the Company, wherever appearing upon a certified copy of any power of attorney issued by the Company in connection with surety bonds, shall be valid and binding upon the Company with the same force and effect as though manually affixed.

I, Renee C. Llewellyn, the undersigned, Assistant Secretary, The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company do hereby certify that the original power of attorney of which the foregoing is a full, true and correct copy of the Power of Attorney executed by said Companies, is in full force and effect and has not been revoked.

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed the seals of said Companies this 22 day of March, 2021

By: _____
Renee C. Llewellyn, Assistant Secretary

Not valid for mortgage, note, loan, letter of credit, currency rate, interest rate or residual value guarantees.

To confirm the validity of this Power of Attorney call 1-610-832-8240 between 9:00 am and 4:30 pm EST on any business day.

PERFORMANCE BOND	BOND NUMBER 6742078 68
PRINCIPAL *(Legal Name and Business Address)* Phillips Hardy, Inc. 15290 Highway 135, Boonville, MO 65233	
SURETY *(Legal Name and Business Address)* Liberty Mutual Insurance Company 175 Berkeley Street, Boston, MA 02116	STATE OF INCORPORATION Massachusetts
PENAL SUM OF BOND *(Expressed in words and numerals)* ($1,032,285.65) One million thirty-two thousand two hundred eighty-five dollars and sixty five cents	CONTRACT DATE

OBLIGATION
KNOW ALL PERSONS BY THESE PRESENTS, that the above named PRINCIPAL, hereinafter referred to and called CONTRACTOR, and the above named SURETY hereby bind themselves unto **City of Clinton (105 E. Ohio, Clinton, Missouri 64735)** as OBLIGEE, hereinafter referred to and called OWNER, in the penal sum stated above, in lawful money of the United States of America to be paid to OWNER. For payment of the penal sum, we bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS,
CONTRACTOR has entered into the written contract agreement identified hereinabove with the OWNER for the following project:

APRON DESIGN PHASES 2 THROUGH 6

CLINTON REGIONAL AIRPROT

which said contract and associated contract documents, including any present or future amendment thereto, is incorporated herein by reference and is hereinafter referred to as the Contract.

CONDITION
NOW, THEREFORE, THE CONDITION OF THIS OBLIGATION is such that, if CONTRACTOR shall promptly and faithfully perform all undertakings, covenants, terms, conditions and agreements of the Contract during the original term of the Contract and any extensions thereof that are granted by the OWNER, with or without notice to the SURETY, and during the period of any guarantee or warranties required under the Contract, and if CONTRACTOR shall perform and fulfill all undertakings, covenants, terms, conditions and agreements of any and all duly authorized modifications of the Contract that hereafter are made, then this obligation shall be void; otherwise it shall remain in full force and effect subject to the following additional conditions:

1. SURETY, for value received, hereby stipulates and agrees that no change, extension of time, modification, omission, addition or change in or to the Contract, or the work performed thereunder or the specifications accompanying the same, shall in any way affect the SURETY'S obligation on this bond; and SURETY hereby agrees to waive notice of any and all such extensions, modifications, omissions, alterations, and additions to the terms of the Contract, work or specifications.

2. Whenever CONTRACTOR shall be and declared by the OWNER to be in default under the Contract, the Surety shall promptly and at the SURETY'S expense remedy the default by implementing one or more of the following actions:

   a. Arrange for the CONTRACTOR, with consent of the OWNER, to perform and complete the Contract; or

   b. Undertake to perform and complete the Contract itself, through its agents or through independent contractors; or

   c. Obtain bids or negotiated proposals from qualified contractors acceptable to the OWNER for a contract for performance and completion of the Contract; arrange for a contract to be prepared for execution by the OWNER and the contractor selected with the OWNER'S concurrence, to be secured with performance and

payment bonds executed by a qualified surety equivalent to the Bonds issued on the Contract; and make available as work progresses (even though there should be a default or a succession of defaults under the contract or contracts of completion arranged under this paragraph) sufficient funds to pay the cost of completion less the balance of the contract price; but not exceeding, including other costs and damages for which the Surety may be liable hereunder, the penal sum of the bond. The term "balance of the contract price", as used in this paragraph, shall mean the total amount payable by OWNER to CONTRACTOR under the Contract and any amendments thereto, disbursed at the rate provided in the original contract, less the amount properly paid by OWNER to CONTRACTOR.

d. With written consent of the OWNER, SURETY may waive its right to perform and complete, arrange for completion or obtain a new contractor and with reasonable promptness, investigate and determine the amount the SURETY is liable to the OWNER and tender payment therefor to the OWNER.

3. CONTRACTOR and SURETY agree that if in connection with the enforcement of this Bond, the OWNER is required to engage the services of an attorney, that reasonable attorney fees incurred by the OWNER, with or without suit, are in addition to the balance of the contract price.

4. No right of action shall accrue on this bond to or for the use of any person or corporation other than the OWNER named herein or the successors or assigns of the OWNER.

WITNESS

In witness whereof, this instrument is executed this the 28th day of June, 20 21.

INDIVIDUAL PRINCIPAL:

Company Name: _____

Signature: _____

Name and Title: _____

CORPORATE PRINCIPAL:

ATTEST:

Signature: Christy Flood

Name and Title: Christy Flood, Sec./Notary

(Affix Corporate Seal)

Corporate Name: Phillips Hardy Inc.

Signature:

Name and Title: Lee Hardy, President

SURETY:

ATTEST:

Signature: Megan Shiveley

Name and Title: Megan Shiveley (Notary Public)

(Affix Seal)

Surety Name: Liberty Mutual Insurance Company

Signature:

Name and Title: Teresa Stephenson (Attorney In-Fact)

(Attach Power of Attorney)

OWNER ACCEPTANCE:

The OWNER approves the form of this Performance Bond.

ATTEST:

Signature: Wendee Seaton

Name and Title: Wendee Seaton, City Clerk Notary

(Affix Seal)

Date: 6.28.21

Signature:

Name and Title: Greg Lowe, Mayor

PAYMENT BOND	BOND NUMBER 6742078B
PRINCIPAL *(Legal Name and Business Address)* Phillips Hardy, Inc. 15290 Highway 135, Boonville, MO 65233	
SURETY *(Legal Name and Business Address)* Liberty Mutual Insurance Company 175 Berkeley St., Boston, MA 02116	STATE OF INCORPORATION Massachusetts
PENAL SUM OF BOND *(Expressed in words and numerals)* ($1,032,285.65) One million thirty two thousand two hundred eighty five dollars and sixty-five cents	CONTRACT DATE

OBLIGATION

KNOW ALL PERSONS BY THESE PRESENTS, that the above named PRINCIPAL, hereinafter referred to and called CONTRACTOR, and the above named SURETY hereby bind themselves unto **City of Clinton (105 E. Ohio, Clinton, Missouri 64735),** as OBLIGEE, hereinafter referred to and called OWNER, in the penal sum stated above, in lawful money of the United States of America to be paid to OWNER. For payment of the penal sum, we bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS,

CONTRACTOR has entered into the written contract agreement identified hereinabove with the OWNER for the following project:

APRON DESIGN PHASES 2 THROUGH 6

CLINTON REGIONAL AIRPROT

which said contract and associated contract documents, including any present or future amendment thereto, is incorporated herein by reference and is hereinafter referred to as the Contract.

CONDITION

NOW, THEREFORE, THE CONDITION OF THIS OBLIGATION is such that, if CONTRACTOR shall promptly make payment to all employees, persons, firms or corporations for all incurred indebtedness and just claims for labor, supplies, materials and services furnished for or used in connection with the performance of the Contract, then this obligation shall be void; otherwise it shall remain in full force and effect subject to the following additional conditions:

1. CONTRACTOR and SURETY indemnify and hold harmless the OWNER for all claims, demands, liens or suits that arise from performance of the Contract

2. SURETY, for value received, hereby stipulates and agrees that no change, extension of time, modification, omission, addition or change in or to the Contract, or the work performed thereunder or the specifications accompanying the same, shall in any way affect the SURETY'S obligation on this bond; and SURETY hereby agrees to waive notice of any and all such extensions, modifications, omissions, alterations, and additions to the terms of the Contract, work or specifications.

3. No final settlement between the OWNER and the CONTRACTOR shall abridge the right of any beneficiary hereunder, whose claim may be unsatisfied.

4. The amount of this bond shall be reduced by and to the extent of any payments made in good faith hereunder.

5. Amounts owed by the OWNER to the CONTRACTOR under the Contract shall be used for the performance of the Contract and to satisfy claims, if any, under any Performance Bond. By the CONTRACTOR furnishing and the OWNER accepting this Bond, they agree that all funds earned by the CONTRACTOR in the performance of the Contract are dedicated to satisfy obligations of the CONTRACTOR and the SURETY under this Bond, subject to the OWNER'S priority to use the funds for the completion of the project.

This Power of Attorney limits the acts of those named herein, and they have no authority to bind the Company except in the manner and to the extent herein stated.

Liberty Mutual Insurance Company
The Ohio Casualty Insurance Company
West American Insurance Company

Certificate No: 8204194-674010

POWER OF ATTORNEY

KNOWN ALL PERSONS BY THESE PRESENTS: That The Ohio Casualty Insurance Company is a corporation duly organized under the laws of the State of New Hampshire, that Liberty Mutual Insurance Company is a corporation duly organized under the laws of the State of Massachusetts, and West American Insurance Company is a corporation duly organized under the laws of the State of Indiana (herein collectively called the "Companies"), pursuant to and by authority herein set forth, does hereby name, constitute and appoint, Barb Henderson, Bethany Eaton, Cheryl Schaller, Eric Kaup, Richard L. Naught, Teresa M. Stephenson, Thomas S. Naught, Timothy P. Eastin, Tracie Zacha

all of the city of Columbia state of MO each individually if there be more than one named, its true and lawful attorney-in-fact to make, execute, seal, acknowledge and deliver, for and on its behalf as surety and as its act and deed, any and all undertakings, bonds, recognizances and other surety obligations, in pursuance of these presents and shall be as binding upon the Companies as if they have been duly signed by the president and attested by the secretary of the Companies in their own proper persons.

IN WITNESS WHEREOF, this Power of Attorney has been subscribed by an authorized officer or official of the Companies and the corporate seals of the Companies have been affixed thereto this 1st day of September, 2020.

Liberty Mutual Insurance Company
The Ohio Casualty Insurance Company
West American Insurance Company

By: _____
David M. Carey, Assistant Secretary

State of PENNSYLVANIA
County of MONTGOMERY ss

On this 1st day of September, 2020 before me personally appeared David M. Carey, who acknowledged himself to be the Assistant Secretary of Liberty Mutual Insurance Company, The Ohio Casualty Company, and West American Insurance Company, and that he, as such, being authorized so to do, execute the foregoing instrument for the purposes therein contained by signing on behalf of the corporations by himself as a duly authorized officer.

IN WITNESS WHEREOF, I have hereunto subscribed my name and affixed my notarial seal at King of Prussia, Pennsylvania, on the day and year first above written.

COMMONWEALTH OF PENNSYLVANIA
Notarial Seal
Teresa Pastella, Notary Public
Upper Merion Twp., Montgomery County
My Commission Expires March 28, 2021
Member, Pennsylvania Association of Notaries

By: _____
Teresa Pastella, Notary Public

This Power of Attorney is made and executed pursuant to and by authority of the following By-laws and Authorizations of The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company which resolutions are now in full force and effect reading as follows:

ARTICLE IV – OFFICERS: Section 12. Power of Attorney.
Any officer or other official of the Corporation authorized for that purpose in writing by the Chairman or the President, and subject to such limitation as the Chairman or the President may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Corporation to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact, subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Corporation by their signature and execution of any such instruments and to attach thereto the seal of the Corporation. When so executed, such instruments shall be as binding as if signed by the President and attested to by the Secretary. Any power or authority granted to any representative or attorney-in-fact under the provisions of this article may be revoked at any time by the Board, the Chairman, the President or by the officer or officers granting such power or authority.

ARTICLE XIII – Execution of Contracts: Section 5. Surety Bonds and Undertakings.
Any officer of the Company authorized for that purpose in writing by the chairman or the president, and subject to such limitations as the chairman or the president may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Company by their signature and execution of any such instruments and to attach thereto the seal of the Company. When so executed such instruments shall be as binding as if signed by the president and attested by the secretary.

Certificate of Designation – The President of the Company, acting pursuant to the Bylaws of the Company, authorizes David M. Carey, Assistant Secretary to appoint such attorneys-in-fact as may be necessary to act on behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations.

Authorization – By unanimous consent of the Company's Board of Directors, the Company consents that facsimile or mechanically reproduced signature of any assistant secretary of the Company, wherever appearing upon a certified copy of any power of attorney issued by the Company in connection with surety bonds, shall be valid and binding upon the Company with the same force and effect as though manually affixed.

I, Renee C. Llewellyn, the undersigned, Assistant Secretary, The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company do hereby certify that the original power of attorney of which the foregoing is a full, true and correct copy of the Power of Attorney executed by said Companies, is in full force and effect and has not been revoked.

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed the seals of said Companies this _____ day of _____, _____.

By: _____
Renee C. Llewellyn, Assistant Secretary

Not valid for mortgage, note, loan, letter of credit, currency rate, interest rate or residual value guarantees.

To confirm the validity of this Power of Attorney call 1-610-832-8240 between 9:00 am and 4:30 pm EST on any business day.

WITNESS

In witness whereof, this instrument is executed this the 28th day of June, 20 21.

INDIVIDUAL PRINCIPAL:

Company Name: _____

Signature: _____

Name and Title: _____

CORPORATE PRINCIPAL:

ATTEST:

Signature: Christy Flood

Name and Title: Christy Flood, Sec./Notary

(Affix Corporate Seal)

Corporate Name: Phillips Hardy Inc.

Signature: _____

Name and Title: Lee Hardy, President

SURETY:

ATTEST:

Signature: Megan Shively

Name and Title: Megan Shiveley (Notary Public)

(Affix Seal)

Surety Name: Liberty Mutual Insurance Company

Signature: _____

Name and Title: Teresa Stephenson (Attorney in Fact)

(Attach Power of Attorney)

OWNER ACCEPTANCE:

The OWNER approves the form of this Payment Bond.

ATTEST:

Signature: Wendee Seaton

Name and Title: Wendee Seaton, City Clerk Notary

(Affix Seal)

Date: 6.28.21

Signature: _____

Name and Title: Greg Lowe, Mayor

FORM OF
CONTRACT AGREEMENT

City of Clinton, Missouri
State Block Grant Project No. **19-022A-1**

THIS AGREEMENT, made as of this 28th day of June, 20 21, is

BY AND BETWEEN

the OWNER:

Name: **City of Clinton, Missouri**

Address: **105 E. Ohio, Clinton, Missouri 64735**
City/State/Zip Code: **Clinton, MO 64735**

And the CONTRACTOR:

Name: Phillips Hardy Inc.

Address: 2601 Bernadette Place,

City/State/Zip Code: Columbia, MO 65203

WITNESSETH:

WHEREAS it is the intent of the Owner to make improvements at **Clinton Regional Airport** generally described as follows;

Construct new apron pavement. Work includes, but is not limited to, concrete pavement construction, asphalt transition, earthwork and associated items.

hereinafter referred to as the Project.

NOW THEREFORE in consideration of the mutual covenants hereinafter set forth, OWNER and CONTRACTOR agree as follows:

Article 1 – Work
It is hereby mutually agreed that for and in consideration of the payments as provided for herein to the CONTRACTOR by the OWNER, CONTRACTOR shall faithfully furnish all necessary labor, equipment, and material and shall fully perform all necessary work to complete the Project in strict accordance with this Contract Agreement and the Contract Documents.

Article 2 – Contract Documents
CONTRACTOR agrees that the Contract Documents consist of the following: this Agreement, General Provisions, Supplementary Provisions, Specifications, Drawings, all issued addenda, Notice to Bidders, Instructions to Bidders, Proposal and associated attachments, Performance Bond, Payment Bond, Wage Rate Determinations, Insurance certificates, documents incorporated by reference, documents incorporated by attachment, and all OWNER authorized change orders issued subsequent to the date of this agreement. All documents comprising the Contract Documents are complementary to one another and together establish the complete terms, conditions and obligations of the CONTRACTOR. All said Contract Documents are incorporated by reference into the Contract Agreement as if fully rewritten herein or attached thereto.

Article 3 – Contract Price
In consideration of the faithful performance and completion of the Work by the CONTRACTOR in accordance with the Contract Documents, OWNER shall pay the CONTRACTOR an amount equal to:

$One Million, Thirty Two Thousand, Two Hundred Eighty Five Dollars and Sixty Five Cents. ($1,032,285.65)
(Amount in Written Words) (Amount in Numerals)

subject to the following;

a. Said amount is based on the schedule of prices and estimated quantities stated in CONTRACTOR'S Bid Proposal, which is attached to and made a part of this Agreement;

b. Said amount is the aggregate sum of the result of the CONTRACTOR'S stated unit prices multiplied by the associated estimated quantities;

c. CONTRACTOR and OWNER agree that said estimated quantities are not guaranteed and that the determination of actual quantities is to be made by the OWNER'S ENGINEER;

d. Said amount is subject to modification for additions and deductions as provided for within the Contract General Provisions.

Article 4 – Payment
Upon the completion of the work and its acceptance by the OWNER, all sums due the CONTRACTOR by reason of faithful performance of the work, taking into consideration additions to or deductions from the Contract price by reason of alterations or modifications of the original Contract or by reason of "Extra Work" authorized under this Contract, will be paid to the CONTRACTOR by the OWNER after said completion and acceptance.

The acceptance of final payment by the CONTRACTOR shall be considered as a release in full of all claims against the OWNER, arising out of, or by reason of, the work completed and materials furnished under this Contract.

OWNER shall make progress payments to the CONTRACTOR in accordance with the terms set forth in the General Provisions. Progress payments shall be based on estimates prepared by the ENGINEER for the value of work performed and materials completed in place in accordance with the Contract Drawings and Specifications.
Progress payments are subject to retainage requirements as set forth in the General Provisions.

Article 5 – Contract Time
The CONTRACTOR agrees to commence work within ten (10) calendar days of the date specified in the OWNER'S Notice to Proceed. CONTRACTOR further agrees to complete said work within **Ninety (90) Calendar Days** of the commencement date stated within the Notice to Proceed.

It is expressly understood and agreed that the stated Contract Time is reasonable for the completion of the Work, taking all factors into consideration. Furthermore, extensions of the Contract Time may only be permitted by execution of a formal modification to this Contract Agreement in accordance with the General Provisions and as approved by the OWNER.

Article 6 – Liquidated Damages
The CONTRACTOR and OWNER understand and agree that time is of the essence for completion of the Work and that the OWNER will suffer additional expense and financial loss if said Work is not completed within the authorized Contract Time. Furthermore, the CONTRACTOR and OWNER recognize and understand the difficulty, delay, and expense in establishing the exact amount of actual financial loss and additional expense. Accordingly, in place of requiring such proof, the CONTRACTOR expressly agrees to pay the OWNER as liquidated damages the non-penal sum of **$1,000** per day for each calendar day required in excess of the authorized Contract Time.

Furthermore, the CONTRACTOR understands and agrees that;

a. the OWNER has the right to deduct from any moneys due the CONTRACTOR, the amount of said liquidated damages;

b. the OWNER has the right to recover the amount of said liquidated damages from the CONTRACTOR, SURETY or both.

Article 7 – CONTRACTOR'S Representations
The CONTRACTOR understands and agrees that all representations made by the CONTRACTOR within the Proposal Form shall apply under this Agreement as if fully rewritten herein.

Article 8 – CONTRACTOR'S Certifications

The CONTRACTOR understands and agrees that all certifications made by the CONTRACTOR within the Proposal shall apply under this Agreement as if fully rewritten herein. The CONTRACTOR further certifies the following;

a. **Certification of Eligibility (29 CFR Part 5.5)**

i. By Entering into this contract, the CONTRACTOR certifies that neither he or she nor any person or firm who has an interest in the CONTRACTOR'S firm is a person or firm ineligible to be awarded Government contracts by virtue of Section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1);

ii. No part of this contract shall be subcontracted to any person or firm ineligible for award of a Government contract by virtue of Section 3(a) of the Davis-Bacon Act or 29 CFR 5.12(a)(1);

iii. The penalty for making false statements is prescribed in the U.S. Criminal Code 18 U.S.C.

b. **Certification of Non-Segregated Facilities (41 CFR Part 60-1.8)**

The federally-assisted construction CONTRACTOR certifies that it does not and will not maintain or provide for its employees any segregated facilities at any of its establishments and that it does not and will not permit its employees to perform their services at any location under its control where segregated facilities are maintained. The Bidder agrees that a breach of this certification is a violation of the Equal Opportunity Clause in this contract.

As used in this certification, the term "segregated facilities" means any waiting rooms, work areas, restrooms and washrooms, restaurants and other eating areas, time clocks, locker rooms and other storage or dressing areas, parking lots, drinking fountains, recreation or entertainment areas, transportation, and housing facilities provided for employees that are segregated by explicit directive or are in fact segregated on the basis of race, color, religion, sex, or national origin because of written or oral policies or employee custom. The term does not include separate or single-user restrooms or necessary dressing or sleeping areas provided to assure privacy between the sexes. The Bidder agrees that (except where it has obtained identical certifications from proposed subcontractors for specific time periods) it will obtain identical certifications from proposed subcontractors prior to the award of subcontracts exceeding $10,000 which are not exempt from the provisions of the Equal Opportunity Clause and that it will retain such certifications in its files.

Article 9 – Miscellaneous

a. CONTRACTOR understands that it shall be solely responsible for the means, methods, techniques, sequences and procedures of construction in connection with completion of the Work;

b. CONTRACTOR understands and agrees that it shall not accomplish any work or furnish any materials that are not covered or authorized by the Contract Documents unless authorized in writing by the OWNER or ENGINEER;

c. The rights of each party under this Agreement shall not be assigned or transferred to any other person, entity, firm or corporation without prior written consent of both parties;

d. OWNER and CONTRACTOR each bind itself, their partners, successors, assigns and legal representatives to the other party in respect to all covenants, agreements, and obligations contained in the Contract Documents.

Article 10 – OWNER'S Representative

The OWNER'S Representative, herein referred to as ENGINEER, is defined as follows:

Garver
7301 West 129th Street Suite #330
Overland Park, KS 66213

Said ENGINEER will act as the OWNER'S representative and shall assume all rights and authority assigned to the ENGINEER as stated within the Contract Documents in connection with the completion of the Project Work.

IN WITNESS WHEREOF, OWNER and CONTRACTOR have executed five (5) copies of this Agreement on the day and year first noted herein.

OWNER

Name: City of Clinton

Address: 105 E. Ohio Street
Clinton, MO 64735

By: Signature

Mayor
Title of Representative

ATTEST:

By: Signature

City Clerk, Notary
Title

CONTRACTOR

Name: Phillips Hardy Inc.

Address: 2601 Bernadette Place
Columbia, MO 65203

By: Signature

President
Title of Representative

ATTEST

By: Signature

Sec./Notary
Title

ITEM SS-101 SAFETY PLAN COMPLIANCE DOCUMENT (SPCD)

DESCRIPTION

101-1.1 The Contractor shall thoroughly review the approved Construction Safety and Phasing Plan (CSPP) and shall comply with approved CSPP. The Contractor shall certify such compliance by completing the attached SPCD and submitting to the Engineer for approval.

PAGE INTENTIONALLY LEFT BLANK

Contractor Safety Plan Compliance Documents

Owner Name: City of Clinton, MO

Airport: Clinton Regional Airport

Project Description: Apron Reconstruction Phase 2 Through 6

Contractor: _____

Each item listed below corresponds to a specific section of the approved CSPP. The Contractor shall certify that he/she will comply with each section of the approved CSPP. Each certified section with a "no" response must be fully explained in an attachment to the SPCD. The document shall be signed and dated by a principal or owner in the Contractor's company. All other requested information shall be completed by the Contractor and submitted to the Engineer for approval as part of the SPCD.

1. **Section 1 - Correspondence:** This project shall be completed in accordance with Section 1 "Coordination" of the approved Construction Safety and Phasing Plan.

Owner: City of Clinton, MO	
Contact: Wallace White (Airport Manager)	**Phone: 660-885-6121**
Engineer: Garver	
Project Manager: Ryan Robinson	**Phone: 913-696-9755**
Project Engineer: Emma Stavey	**Phone: 913-955-2366**
Construction Observer:	**Phone:**
Materials Testing: KTI	**Phone:**
Contractor:	
Project Manager:	**Phone:**
Superintendent:	**Phone:**
Subcontractors:	**Phone:**
LIST ALL SUBS	

Yes_____No_____

2. **Section 2 - Phasing:** This project shall be completed in accordance with Section 2 "Phasing" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

3. **Section 3 – Areas of Operations Affected by Construction Activity:** This project shall be completed in accordance with Section 3 "Areas of Operations Affected by Construction Activity" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

4. **Section 4 – Protection of Navigational Aids (NAVAIDS):** This project shall be completed in accordance with Section 4 "Protection of Navigational Aids (NAVAIDS)" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

5. **Section 5 – Contractor Access:** This project shall be completed in accordance with Section 5 "Contractor Access" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

6. **Section 6 – Wildlife Management:** This project shall be completed in accordance with Section 6 "Wildlife Management" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

7. **Section 7 – Foreign Object Debris (FOD) Management:** This project shall be completed in accordance with Section 7 "Foreign Object Debris (FOD) Management" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

8. **Section 8 – Hazardous Materials (HAZMAT) Management:** This project shall be completed in accordance with Section 8 "Hazardous Materials (HAZMAT) Management" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

9. **Section 9 – Notification of Construction Activities:** This project shall be completed in accordance with Section 9 "Notification of Construction Activities" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

10. **Section 10 – Inspection Requirements:** This project shall be completed in accordance with Section 10 "Inspection Requirements" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

11. **Section 11 – Underground Utilities:** This project shall be completed in accordance with Section 11 "Underground Utilities" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

12. **Section 12 – Penalties:** This project shall be completed in accordance with Section 12 "Penalties" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

13. **Section 13 – Special Conditions:** This project shall be completed in accordance with Section 13 "Special Conditions" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

14. **Section 14 – Runway and Taxiway Visual Aids:** This project shall be completed in accordance with Section 14 "Runway and Taxiway Visual Aids" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

15. **Section 15 – Marking and Signs for Access Routes:** This project shall be completed in accordance with Section 15 "Marking and Signs for Access Routes" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

16. **Section 16 – Hazard Marking and Lighting:** This project shall be completed in accordance with Section 16 "Hazard Marking and Lighting" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

17. Section 17 – Work Zone Lighting for Nighttime Construction: This project shall be completed in accordance with Section 17 "Work Zone Lighting for Nighttime Construction" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

18. **Section 18 – Protection of Safety Areas, Object Free Areas, Object Free Zones, and Approach / Departure Surfaces:** This project shall be completed in accordance with Section 18 "Protection of Safety Areas, Object Free Areas, Object Free Zones, and Approach / Departure Surfaces" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

19. **Section 19 – Other Limitations on Construction:** This project shall be completed in accordance with Section 19 "Other Limitations on Construction" of the approved Construction Safety and Phasing Plan.

Yes_____No_____

I certify that, for the project identified herein, the responses to the foregoing items are correct as marked, and that I shall comply with the approved Construction Safety and Plan.

Signed: _____
Contractor's Authorized Representative

Date: _____

_____
Print Name and Title of Contractor's Representative

END OF ITEM SS-101

PAGE INTENTIONALLY LEFT BLANK

ITEM SS-110 STANDARD SPECIFICATIONS

GENERAL

110-1.1 The standard specifications of the Missouri Department of Transportation (MoDOT) are bound in a book titled Missouri Standard Specifications for Highway Construction. These specifications are referred to herein as "Standard Specifications." The latest edition shall apply. A copy of these "Standard Specifications" may be obtained from MoDOT at their customary charge.

INCORPORATION AND MODIFICATION

110-2.1 Certain parts of the Standard Specifications are appropriate for inclusion in these Technical Specifications. Such parts are incorporated herein by reference to the proper section or paragraph number. The individual specification numbers noted herein may be different from those in the latest edition of the "Standard Specifications." The most current specification number shall apply. Each such referenced part shall be considered a part of these Contract Documents as though copied herein in full.

110-2.2 Certain referenced parts of the Standard Specifications are modified in the Specifications that follow. In case of conflict between the Standard Specifications and the Specifications that follow, the Specifications that follow shall govern.

110-2.3 Individual material test numbers change from time to time. Use the latest applicable test.

110-2.4 Reference in the Standard Specifications to the "Department" is herein changed to the "Owner".

MEASUREMENT AND PAYMENT

Standard Specifications will not be measured for separate payment.

END OF ITEM SS-110

PAGE INTENTIONALLY LEFT BLANK

ITEM SS-120 CONSTRUCTION SAFETY AND SECURITY

DESCRIPTION

120-1.1 This item covers safety and security for construction of the proposed improvements.

The attention of the bidder is directed to the necessity for careful examination of the entire project site to determine, at the time of bid preparation, the full extent of work to be done under the item "Construction Safety and Security."

The item "Construction Safety and Security" shall include:

1. Lighted Barricades
2. Airport Security Requirements
3. Airport Safety Requirements

CONSTRUCTION METHODS

120-2.1 LIGHTED BARRICADES. The Contractor shall furnish, install, maintain, and remove lighted barricades in accordance with details on the plans and as directed by the Engineer. The lighted barricades shall be constructed and installed as shown on the plans. All lighted barricades be constructed in accordance with AC 150/5370-2G Operational Safety on Airports During Construction.

All work involved in the furnishing, installation, maintenance, and removal of lighted barricades will not be measured for separate payment, but will be considered subsidiary to the bid item "Construction Safety and Security."

120-2.2 AIRPORT SECURITY REQUIREMENTS. The Contractor shall abide by the Airport Security requirements that are outlined in the Construction Safety and Phasing Plan (CSPP). Any costs associated with the Airport Security requirements will not be measured for separate payment but will be considered subsidiary to the bid item "Construction Safety and Security."

120-2.3 AIRPORT SAFETY REQUIREMENTS. The Contractor shall abide by the Airport Safety requirements that are outlined in the Construction Safety and Phasing Plan (CSPP). All costs associated with the Airport Safety requirements will not be measured for separate payment but will be considered subsidiary to the bid item "Construction Safety and Security."

MEASUREMENT AND PAYMENT

120-3.1 Construction safety and security will be measured as a lump sum complete item. Work completed and accepted under this item will be paid for at the contract lump sum price bid for "Construction Safety and Security", which price shall be full compensation for furnishing all labor, tools, equipment and incidentals necessary to complete the work.

Periodic payments will be made under this item in proportion to the amount of work accomplished, as determined by the Engineer.

Payment will be made under:

Item SS-120-3.1 Construction Safety and Security - per Lump Sum

END OF ITEM SS-120

PAGE INTENTIONALLY LEFT BLANK

ITEM SS-130 TRENCH AND EXCAVATION SAFETY SYSTEMS

DESCRIPTION

130-1.1 This section covers trench and excavation safety system required for constructing improvements that necessitate open excavations on the project. All work under this item shall be in accordance with the current edition of the "Occupational Safety and Health Administration Standard for Excavation and Trenches Safety System, 29 CFR 1926, Subpart "P", a copy of which may be purchased from the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

NOTIFICATIONS REQUIRED

130-2.1 The Contractor, prior to beginning any excavation, shall notify the State Department of Labor (Safety Division) that work is commencing on a project with excavations greater than five feet.

The Contractor shall notify all Utility Companies and Owners in accordance with OSHA Administration 29 CFR 1926.651(b)(2) for the purpose of locating utilities and underground installations.

EXISTING STRUCTURES AND UTILITIES

130-3.1 Where the trench or excavation endangers the stability of a building, wall, street, highway, utilities or other installation, the Contractor shall provide support systems such as shoring, bracing, or underpinning to ensure the stability of such structure or utility.

The Contractor may elect to remove and replace or relocate such structures or utilities with the written approval of the owner of the structure or utility and the Project Owner.

MEASUREMENT AND PAYMENT

130-4.1 The work required by this item will be paid for at the lump sum price bid for "Trench and Excavation Safety Systems", which price shall be full compensation for furnishing all labor, tools, equipment and incidentals necessary to complete the work. After award of the contract, the Contractor shall submit to the Engineer a breakdown of cost for work involved in the lump sum price bid for "Trench and Excavation Safety Systems" and shall, with each periodic payment request, submit a certification by the Contractor's "competent person" as defined in Subpart "P" 1926.650(b) that the Contractor has complied with the provisions of "Occupational Safety and Health Administration Standard for Excavation and Trenches Safety System", 29 CFR 1926 Subpart P for work for which payment is requested.

Periodic payments will be made under this item in proportion to the amount of work accomplished, as determined by the Engineer.

Payment will be made under:

Item SS-130-4.1 Trench and Excavation Safety Systems - per Lump Sum

END OF ITEM SS-130

PAGE INTENTIONALLY LEFT BLANK

ITEM SS-220 PAVEMENT EDGE GRADING

DESCRIPTION

220-1.1 This item covers placement and compaction of all materials within the limits of the work required to construct edge grading along the edges of the pavement overlay, or other purposes in accordance with these specifications and in conformity to the dimensions and typical sections shown on the plans.

MATERIALS

220-2.1 TOPSOIL. Topsoil used shall meet the requirements of T-905. Additional topsoil required to complete the project shall be obtained as provided in T-905.

CONSTRUCTION METHODS

220-3.1 GENERAL. Along the edges of new pavement overlay, topsoil shall be placed to provide a 1.5 inch drop-off from the edge of the new pavement surface to ground level and provide grading from the pavement edge to the shoulder as shown in the plans.

If it is necessary to interrupt existing surface drainage, sewers or under-drainage, conduits, utilities, or similar underground structures the Contractor shall be responsible for and shall take all necessary precautions to preserve them or provide temporary services. When such facilities are encountered, the Contractor shall notify the Engineer, who shall arrange for their removal if necessary. The Contractor shall, at his/her own expense, satisfactorily repair or pay the cost of all damage to such facilities or structures which may result from any of the Contractor's operations during the period of the contract.

220-3.2 PREPARATION OF EMBANKMENT AREA. Before beginning any embankment, the areas where the embankment is to be made shall be stripped or disked to a minimum depth of four inches. Topsoil obtained from the stripping operations shall be salvaged and stockpiled for later use.

220-3.3 FORMATION OF EMBANKMENTS. The placed material shall be within +/-2 percent of optimum moisture content before rolling to obtain the prescribed compaction. In order to achieve uniform moisture content throughout the layer, wetting or drying of the material and manipulation shall be required when necessary. Should the material be too wet to permit proper compaction or rolling, all work on all of the affected portions of the embankment shall be delayed until the material has dried to the required moisture content. Sprinkling of dry material to obtain the proper moisture content shall be done with approved equipment that will sufficiently distribute the water. Sufficient equipment to furnish the required water shall be available at all times. The embankment shall be compacted by small roller or other means approved by the engineer. Rolling operations shall be continued until the embankment is compacted to not less than 90 percent of maximum density as determined by ASTM D 1557.

Frozen material shall not be placed in the embankment nor shall embankment be placed upon frozen material.

220-3.4 PLACING TOPSOIL. Topsoil shall be placed in accordance with T-905.

METHOD OF MEASUREMENT

220-4.1 The quantity of pavement edge grading to be paid for shall be the number of linear feet placed measured along the pavement edge, regardless of the transverse width or depth of the grading. There will be no separate measurement of payment for compacted embankment, and all costs incidental to stripping, hauling, stockpiling, placing, compacting, disking, watering, shaping, and other necessary operations for construction of edge grading will be included in the contract price for pavement edge grading.

BASIS OF PAYMENT

220-5.1 For "Pavement Edge Grading" payment shall be made at the contract unit price per linear foot. This price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the item.

Payment will be made under:

Item SS-220-5.1	Pavement Edge Grading – per Linear Foot

ITEM SS-262 TIEDOWN ANCHORS

DESCRIPTION

262-1.1 This item shall consist of furnishing and installing tiedown anchors to the tolerances specified and to the lines, locations and grades directed by the Engineer.

MATERIAL REQUIREMENTS

262-2.1 Ductile Iron tiedown anchors shall be Neenah R-3490-A or approved equal.

262-2.2 Concrete for tiedown anchor shall be 3,000 psi commercial grade concrete.

CONSTRUCTION REQUIREMENTS

262-3.1 The aircraft tiedown anchors shall be installed in the ramp at the locations and in accordance with the details shown in plans and in accordance with the manufacturer's directions.

Anchors in pavement shall be installed flush with pavement surface and given a broom finish.

Contractor shall provide ½" minimum diameter nylon ropes with minimum breaking strength of 3000 lbs. One 12' length shall be provided for each tiedown anchor installed. One sample of rope segment shall be submitted and approved by the Engineer. Ropes shall be considered subsidiary to anchors.

METHOD OF MEASUREMENT

262-4.1 Tiedown anchors acceptably installed will be measured per each in place and completed.

BASIS OF PAYMENT

262-5.1 Tiedown anchors installed and measured as provided above will be paid for at the unit price bid per each. This price shall be full compensation for all furnishing and placing all materials and for all equipment, tools, labor and incidentals necessary to complete the work.

Payment will be made under:

Item SS-262-5.1 Tiedown Anchor – per Each

END OF ITEM SS-262

PAGE INTENTIONALLY LEFT BLANK

ITEM SS-300 BASIC ELECTRICAL REQUIREMENTS

DESCRIPTION

300-1.1 This item shall consist of furnishing and installing complete electrical systems as defined in the plans and in these specifications. The work includes the installation, connection and testing of new electrical systems, equipment, and all required appurtenances to construct and demonstrate proper operation of the completed electrical systems.

300-1.2 The Contractor shall maintain current copies of all referenced and applicable standards on the job site. The Contractor is responsible to make known to the Engineer any conflict between plans and specifications that he observes or of which he is made aware.

300-1.3 This work shall consist of lockout/tagout and constant current regulator calibration procedures at the airport electrical vault in accordance with the design and details shown in the plans and in compliance with these specification documents.

EQUIPMENT AND MATERIALS

300-2.1 STANDARDS.

a. Applicable National Fire Protection Association (NFPA) codes, including but not limited to:
   (1) NFPA 70 - National Electrical Code.
   (2) NFPA 70E - Standard for Electrical Safety in the Workplace.
   (3) NFPA 101 - Life Safety Code.
   (4) Internet Website: http://www.nfpa.org

b. Applicable Code of Federal Regulations (CFR) codes, including but not limited to:
   (1) 29 CFR 1910 - Occupational Safety and Health Standards (OSHA)
   (2) 29 CFR 1926 - Safety and Health Regulations for Construction.
   (3) Internet Website: http://www.gpoaccess.gov/cfr/index.html

c. ANSI/IEEE C2 - National Electrical Safety Code.

d. NECA 1 – Standard for Good Workmanship in Electrical Construction.

e. Applicable Federal, State and Local Electrical Codes.

f. Applicable Federal, State and Local Energy Codes.

g. Applicable Federal, State and Local Building Codes.

h. Applicable Federal, State and Local Fire Codes.

i. Applicable City Electrical Code.

j. Applicable City Ordinances pertaining to electrical work.

k. Applicable Federal, State and Local - Environmental, Health and Safety Laws and Regulations.

Contractor shall utilize the most current editions of standards, which are current at time of bid and as recognized by the Authority Having Jurisdiction for the respective standard.

300-2.2 GENERAL.

a. Airport lighting equipment and materials covered by Federal Aviation Administration (FAA) specifications shall be certified and listed under Advisory Circular (AC) 150/5345-53, Airport Lighting Equipment Certification Program, current version on the date that the submittals are received by the Engineer. When an equipment advisory circular is being updated and two equipment lists for the same specific equipment are listed in the current certified equipment AC 150/5345-53 addendum, only that equipment qualified to the latest advisory circular will be acceptable.

b. Airport lighting equipment and materials shall also meet the Buy American Preference requirements in 49 USC 50101 and the Aviation Safety and Capacity Expansion Act. The equipment shall be approved and listed on the FAA "Equipment Meeting Buy American Requirements" list located at *www.faa.gov/airports/aip/procurement/federal_contract_provisions/*, current version on the date that the submittals are received by the Engineer, or the Contractor may submit a signed formal letter from the manufacturer that clearly lists the specific equipment, model number, location where it is manufactured, and statement certifying that the equipment and/or materials meet the Buy American Preference requirements.

c. All equipment and materials covered by referenced specifications shall be subject to acceptance through manufacturer's certification of compliance with the applicable specification when requested by the Engineer. All equipment and materials shall be new and meet applicable manufacturer's standards. All electrical components and products shall be tested and listed by an OSHA accepted, nationally recognized testing laboratory (NRTL) to conform to the standards indicated in these contract documents and to the industry standards required in the NEC, NEMA, IEEE, UL, and applicable FAA advisory circulars.

d. Manufacturer's certifications shall not relieve the Contractor of the Contractor's responsibility to provide materials in accordance with these specifications and acceptable to the Engineer. Materials supplied and/or installed that do not materially comply with these specifications shall be removed, when directed by the Engineer and replaced with materials, which do comply with these specifications, at the sole cost of the Contractor.

e. All materials and equipment used to construct this item shall be submitted to the Engineer for approval prior to ordering the equipment. Submittals consisting of marked catalog sheets or shop drawings shall be provided. Submittal data shall be presented in a clear, precise and thorough manner. Original catalog sheets are preferred. Photocopies are acceptable provided they are as good a quality as the original. Clearly and boldly mark each copy to identify pertinent products or models applicable to this project. Indicate all optional equipment and delete non-pertinent data. Submittals for components or electrical equipment and systems shall identify the equipment for which they apply on each submittal sheet. Markings shall be boldly and clearly made with arrows or circles (highlighting is not acceptable). Contractor is solely responsible for delays in project accruing directly or indirectly from late submissions or resubmissions of submittals.

f. The data submitted shall be sufficient, in the opinion of the Engineer, to determine compliance with the Contract Documents plans and specifications. The Engineer reserves the right to reject all equipment, materials or procedures, which, in the Engineer's opinion, does not meet the system design and the standards and codes, specified herein.

g. All equipment and materials furnished and installed under this section shall be guaranteed against defects in materials and workmanship for a period of at least twelve (12) months from final acceptance by the Owner. The defective materials and/or equipment shall be repaired or replaced, at the Owner's discretion, with no additional cost to the Owner.

h. Refer to Special Provisions Item C-13 Submittals for electronic or paper submittal requirements for Engineer's review.

i. After approval of submitted equipment, the Contractor shall supply the following Operation and Maintenance Manual documentation to the Owner. Two (2) complete sets of documentation shall be supplied for each model of equipment. The documentation shall be securely bound in heavy-duty 3-ring binders. The information for each piece of equipment shall be indexed using typewritten label tabs. The spine of each binder shall have a typewritten label, which indicates the included equipment types. The documentation shall include:

(1) Approved Submittals and Shop Drawings
(2) Cable Splicer Qualifications, Type and Voltage

(3) State Contractors License with Electrical Classification
(4) Master, Journeyman and Apprentice Electrician Licenses and Certifications
(5) Lockout/Tagout Program
(6) Installation Manuals
(7) Operation Manuals
(8) Maintenance Manuals
(9) Parts Lists, including recommended spare parts. Recommended spare parts shall be furnished with the respective equipment.
(10) Ground Rod Impedance Test Reports
(11) Cable Pulling Tension Value Logs
(12) Insulation Resistance Test Reports
(13) Regulator Load and Calibration Reports for testing, checking and adjusting all regulators in the electrical vault

j. After approval of the O&M Manuals, the Contractor shall provide three (3) complete electronic copies of all documentation in Adobe PDF file format on CD-R (non-rewriteable) discs storage media. The electronic files shall contain searchable text and include a hyperlink index for ease in locating information with the PDF file.

k. All requirements herein Item SS-300 shall be applicable to all referenced sections in these contract documents and applicable to all sections, which reference Item SS-300.

l. The Contractor is the single source of responsibility for the installation and integration of the airport's lighting, power, and control systems. New airport lighting equipment and materials shall be fully compatible with all other new and existing airport lighting equipment and systems. Any non-compatible components furnished by the Contractor shall be replaced at no additional cost to the Owner with a similar unit that is approved by the Engineer and compatible with the remainder of the airport lighting system.

300-2.3 OPERATION AND MAINTENANCE DATA.

Assemble a complete set of operation and maintenance data indicating operation and maintenance of each system, subsystem, and piece of equipment. Provide bound hard copies and electronic copies as noted in section 300-2.2.

a. Certificate of Substantial Completion, Release and Contractor's Affidavit, executed copies.

b. Final approved equipment submittals, including product data sheets and shop drawings, clearly labeled.

c. Installation manuals: Description of function, installation and calibration manuals, normal operating characteristics and limitations, performance curves, engineering data and tests, and complete nomenclature and commercial numbers of all replaceable parts.

d. Operations manuals: Manufacturer's printed operating instructions and procedures to include start-up, break-in, routine and normal operating instructions; regulation, control, stopping, shutdown, and emergency instructions; summer and winter operating instructions; and all programming and equipment settings.

e. Maintenance manuals: Maintenance procedures for routine preventative maintenance and troubleshooting; disassembly, repair, and reassembly; aligning and adjusting instructions.

f. Service manuals: Servicing instructions and lubrication charts and schedules, including the names and telephone numbers of personnel to contact for both routine periodic and warranty service for equipment and materials provided under this Specification.

g. Final test reports, clearly labeled, including but not limited to, insulation resistance test reports, ground rod impedance test reports, cable pulling tension values logs, and equipment certification tests.

h. Final certified calibration sheets for all equipment and instruments.

i. Preventive maintenance programs for the visual aid facilities and equipment installed in this project, including the applicable equipment sections within Chapter 5 "Preventive Maintenance" from AC 150/5340-26 (latest edition) "Maintenance of Airport Visual Aid Facilities".

300-2.4 WIRE.

For ratings up to 600 volts, moisture and heat resistant thermoplastic wire conforming to Commercial Item Description A-A-59544A Type THWN-2 shall be used. The wires shall be of the type, size, number of conductors, and voltage shown in the plans or in the proposal.

Service, underground feeder, and underground branch circuit wiring shall be minimum Type THHN/THWN-2 unless otherwise noted.

Indoor feeder and indoor branch circuit wiring shall be minimum Type THHN/THWN-2 unless otherwise noted.

Unless otherwise indicated, conductors No. 10 AWG and smaller shall be solid, and conductors No. 8 AWG and larger shall be stranded.

For electrical work of 600 volts or less, all conductors, terminations, terminal blocks, lugs, connectors, devices and equipment shall be listed, marked, and rated 75 degrees C minimum unless otherwise noted.

Use pulling means, including fish tape, cable, rope, and basket-weave wire/cable grips that will not damage cables or raceway. Pull ropes and pull wires shall have sufficient tensile strength for the cable(s) to be pulled and installed. Damaged cable or raceway shall be replaced at no additional cost to the Owner. Calculate and do not exceed the maximum allowable pulling tension or maximum allowable sidewall bearing pressure for all conductors and cables.

Install pull wires in empty raceways. Use a polypropylene plastic line with not less than 200-pound tensile strength. Secure and leave at least 12 inches of slack at each end of pull wire to prevent it from slipping back into the conduit. Cap spare raceways with removable tapered plugs, designed for this purpose.

Colorable L-824 cable in solid non-fading colors [shall][may] be used for permanent series circuit identification. The color coding shall be continuous throughout the facility and airfield for each series circuit and conductor so that the circuit and conductor are readily identifiable. Mixing of colors for a series circuit is unacceptable.

Fiber optic cables, generator remote annunciator panel cables, and telephone cables shall be the outdoor rated type, suitable for direct earth burial, but shall be installed within the conduits and duct bank systems as indicated in the plans.

300-2.5 TAPE. Rubber and plastic electrical tapes shall be Scotch Electrical Tape Numbers 23 and 88, respectively, as manufactured by the Minnesota Mining and Manufacturing Company, or an approved equal.

The electrical installation shall conform to the requirements of the latest edition of National Fire Protection Association, NFPA-70, National Electrical Code.

Copies of the National Electrical Code may be obtained from the National Fire Protection Associations, Inc., One Batterymarch Park, Quincy, Massachusetts 02269.

CONCRETE. Concrete shall be a commercial grade ready mix with a minimum 28-day compressive strength of 4000 PSI (unless otherwise noted) using 1-inch (25-mm) maximum size course aggregate, as determined by test cylinders made in accordance with ASTM C 31 and tested in accordance with ASTM C 39. Concrete located within one foot of the proposed ground surface shall contain 4 to 6 percent air content.

Mixing Conditions: Concrete shall not be mixed while the air temperature is below 40°F (4°C) without permission of the Engineer. If permission is granted for mixing under such conditions, aggregates or water, or both, shall be heated and the concrete shall be placed at a temperature not less than 50°F (10°C) nor more than 100°F (38°C). The Contractor shall be held responsible for any defective work, resulting from freezing or injury in any manner during placing and curing, and shall replace such work at his/her expense.

Placing Concrete: All concrete shall be placed during daylight, unless otherwise approved by the Engineer.

Cold Weather Protection: When concrete is placed at temperatures below 40°F (4°C), the Contractor shall provide satisfactory methods and means to protect the mix from injury by freezing. The aggregates, or water, or both, shall be heated to place the concrete at temperatures between 50°F and 100°F (10°C and 38°C). After the concrete has been placed, the Contractor shall provide sufficient protection such as cover, canvas, framework, heating apparatus, etc., to enclose and protect the structure and maintain the temperature of the mix at not less than 50°F (10°C) until at least 60% of the designed strength has been attained.

Reinforcing: All reinforcing steel bars shall conform to ASTM A615, Grade 60.

300-2.6 CONSTANT CURRENT REGULATORS.

The Contractor shall submit his initial regulator load test reports prior to any work on the electrical system. The Contractor shall test all regulators within the electrical vault and submit these reports to the Engineer prior to Contractor proceeding with his work.

The Contractor shall calibrate all new and existing regulators following construction and prior to final acceptance testing in accordance with FAA AC 150/5340-26 "Maintenance of Airport Visual Aid Facilities" and manufacturer's recommendations. Contractor shall submit calibration report to Engineer.

After final acceptance testing has been completed, the Contractor shall complete and submit his final regulator load test reports to the Engineer for all regulators and insert copies of the final regulator load test reports in the Operation and Maintenance Manuals.

CONSTRUCTION METHODS

300-3.1 LOCKOUT/TAGOUT PROGRAM. The Contractor shall provide a complete copy of an electrical energy source Lockout/Tagout Program to the Owner, with copy to the Engineer. The document shall clearly identify the on-site master electricians and their contact information, including office and mobile telephone numbers.

The Lockout/Tagout Program shall comply with Part 1910 – Occupational Safety and Health Standards (OSHA) Subpart S – Electrical, and meet the requirements of 29 CFR 1910.147, The Control of Hazardous Energy (Lockout/Tagout), including requirements listed in 1910.331 through 1910.335.

Implementation of the Lockout/Tagout Program and all other related safety requirements are the sole responsibility of the Contractor.

300-3.2 SAFETY PROGRAM. The Contractor shall implement an electrical safety program that complies with NFPA 70E and 29 CFR 1926.

Implementation of the Electrical Safety Program, determining and providing proper Personal Protective Equipment (PPE), training and enforcing personnel to wear the prescribed PPE, conducting work area safety inspections (including correcting deficiencies), and all other related safety requirements are the sole responsibility of the Contractor.

All work involved in the preparation and implementation of the safety program will not be measured for separate payment but will be considered subsidiary to the lockout/tagout bid item.

300-3.3 PRECONSTRUCTION MEETING.

A preconstruction meeting will be held with the Airport, FAA, Engineer and Contractor, prior to any work. Complete submittals and shop drawings will be submitted at this time for review. An equipment procurement schedule will be provided by the Contractor with an anticipated field construction start date. The progress construction schedule will be submitted for review each week and shall outline all installation, testing and demolition work.

300-3.4 GENERAL.

The Contractor shall be responsible for coordinating all electrical work with the Utility. The Contractor shall provide temporary service conductors and raceway system. The Contractor shall then provide and connect permanent service conductors and raceway system after the completion.

All secondary conductors and controls, signaling and lighting shown in or on buildings are included in this project. Electrical service shall be extended from the service equipment as indicated.

In general, the various electrical equipment and material to be installed by the various trades under this specification shall be run as indicated, as specified herein, as required by particular conditions at the site, and as required to conform to the generally accepted standards to complete the work in a neat and satisfactory manner. The following is a general outline concerning the running of various systems and is to be expected where the drawings or conditions at the buildings necessitate deviating from these standards.

The drawings and specifications are complementary; any work required by one, but not by the other, shall be performed as though required by both.

The Contractor shall maintain copies of all equipment installation manuals on site during construction.

All conduits shall be run exposed in the equipment rooms or run concealed as indicated.

The construction details of the building are illustrated on the drawings. Each Contractor shall thoroughly acquaint himself with the details before submitting his bid as no allowances will be made because of the Contractor's unfamiliarity with these details.

The electrical plans do not give exact locations, etc., and do not show all the offsets, control lines, junction boxes, and other installation details. Each Contractor shall carefully lay out his work at the site to conform to the job conditions, to conform to details of installation supplied by the manufacturers of the equipment to be installed, and thereby to provide complete operating systems.

The electrical plans show diagrammatically the locations of the various electrical outlets and apparatus and the method of circulating and controlling them. Exact locations of these outlets and apparatus shall

be determined by reference to the general plans and to all detail drawings, etc., by measurements at the buildings, and in cooperation with other crafts, and in all cases shall be subject to the approval of the Engineer. The Engineer reserves the right to make any reasonable change in location of any outlet or apparatus before installation, without additional cost to the Owner.

These Specifications and the accompanying Drawings are intended to cover systems which will not interfere with the structure of the buildings, which will fit into the several available spaces, and which will insure complete and satisfactory systems. Each bidder shall be responsible for the proper fitting of his material and apparatus into the buildings.

Should the particular equipment which any bidder proposes to install require other space conditions than those indicated on the Drawings, he shall arrange for such space with the Engineer before submitting his bid. Should changes become necessary because of failure to comply with this clause, the Contractor shall make such changes at the Contractor's expense.

Should the particular equipment which any bidder proposes to install require other installation methods, such as larger light base junction structures, etc., he shall include all such equipment and appurtenances in his bid. Should changes become necessary because of failure to coordinate equipment requirements and comply with this clause, the Contractor shall make such changes at the Contractor's expense.

The Contractor shall be responsible to see that each party furnishes electrical equipment which meets the electrical requirements specified herein and that all systems work together to produce the specified operation.

Where two or more units of the same kind or class of equipment are required, these shall be products of a single manufacturer; however, the component parts need not be the products of one manufacturer.

Each Contractor shall submit working scale drawings of all his apparatus and equipment which in any way varies from these Specifications and Plans, which shall be checked by the Engineer and approved before the work is started, and interferences with the structural conditions shall be corrected by the Contractor before the work proceeds.

Electrical equipment, such as switchgear, switchboards, panelboards, load centers and other power supply equipment, shall not be used as a common enclosure, pull box or junction box for routing conductors of different systems, unless the equipment is specifically designed for this purpose and indicated as such on the Plans.

All electrical equipment shall be securely mounted as indicated in the plans, as required by the contract specifications, as required by guidelines and codes, and as required by the manufacturer using hardware compliant with the environmental conditions.

Interior components of electrical enclosures shall be securely mounted using appropriate hardware within the enclosure. Adhesives or adhesive tapes/strips are not allowed and are prohibited.

Electrical components, including but not limited to, relays, circuit boards, electronics, etc., shall be installed within approved enclosures.

The Contractor shall keep ends of conduits, including those extending through roofs, equipment and fixtures covered or closed with caps or plugs to prevent foreign material from entering during construction.

Where portions of raceways are known to be subjected to different temperatures, where condensation is a problem, and where passing from interior to exterior of a building, the portion of raceway or sleeve shall be filled with an approved material to prevent the circulation of air, prevent condensation, and prevent moisture entry. Sealing of raceways shall not occur until after the conductors and cables have been installed, tested and accepted by the Engineer.

The Contractor shall install any temporary lines and connections required to maintain electric services and safely remove and dispose of them when complete.

All temporary wiring shall conform to OSHA standards. Remove temporary services when work is complete. Any damage to electrical equipment caused by the Contractor shall be repaired at no cost to the Owner.

All non-current carrying parts and neutrals shall be grounded as indicated on the Drawings or as required by the Codes.

White and/or gray outer finish conductors may only be used as grounded conductors or neutral conductors in accordance with NEC.

Install insulated green equipment grounding conductors with all feeder and branch circuits.

Provide separate insulated equipment grounding conductors from grounding system to each electrical equipment, telecommunication equipment, other special electrical system equipment, and appurtenance item location in accordance with NFPA 70 and other applicable standard requirements.

The bidder shall inspect the site, thoroughly acquaint himself with conditions to be met and work to be accomplished. Failure to comply with this shall not constitute grounds for any additional payments.

Where electrical equipment is installed that causes electrical noise interference with other systems either existing or installed under this contract, the offending equipment shall be equipped with isolating transformers, filters, reactors, shielding, or any other means as required for the satisfactory suppression of the interferences, as determined by the Engineer.

All junction boxes, expansion joints, flexible connections, instruments and similar items requiring servicing or repairs shall be installed in an accessible location.

All salvage and equipment removed by the work shall remain the property of the Owner. Material removed from the project shall be stored on the project site where and as directed. Debris shall be removed from the job site and disposed of by the Contractor.

The Contractor shall maintain his work area clean and orderly at all times. Debris shall be removed promptly. The electrical system shall be thoroughly cleaned inside and outside of all enclosures to remove all metal shavings or other work debris, dust, concrete splatter, plaster, paint and lint.

The Contractor shall do all excavating and backfilling made necessary by electrical work and shall remove all surplus or supply any earth required to establish the proper finished grade.

The Contractor shall do all cutting and patching made necessary by electrical work, but in no case shall he cut through or into any structural member without written permission of the Engineer.

All steel conduits, supports, channels, fittings, nuts, bolts, etc. shall be galvanized, corrosion-resistant type unless otherwise noted.

An approved anti-seize compound shall be used on all threads to prevent equipment and thread damage.

Equipment shall be installed in accordance with manufacturer's recommendation. Make all final electrical connections and coordinate all items with other trades.

Correct unnecessary damage caused due to installation of work, brought about through carelessness or lack of coordination. All openings, sleeves, and holes to be properly sealed, fire proofed and waterproofed. Any water leaks arising from project construction will be immediately corrected to the satisfaction of the Owner and the Engineer.

300-3.5 POWER SUPPLY EQUIPMENT. Electrical equipment, such as switchgear, switchboards, panelboards, load centers, and other power supply equipment, shall not be used as a common enclosure, pull box or junction box for routing conductors of different systems, unless the equipment is specifically designed for this purpose and indicated as such on the Plans.

If shown in the plans, the power supply equipment shall be set on concrete housekeeping pads to provide a minimum space of 3-1/2 inches between the equipment and the floor. All equipment shall be secured to the floor or wall in accordance with the manufacturer's recommendations and these contract document requirements.

300-3.6 DUCT AND CONDUIT. Conduits shall be galvanized rigid steel unless otherwise indicated or specified. Refer to one-line diagram conduit notes for specific requirements.

Conduit runs shall be one trade size continuously with no reducers allowed. Changing of conduit size is only permitted at manholes, handholes, and boxes and conduit bodies used as outlet, device, junction, or pull boxes, including approved, listed fittings with removable covers.

Use an approved, listed adapter/coupling to convert to other types of conduit. Reducer couplings are not allowed.

For underground service entrance, feeder and branch circuit raceways, offsets and bends over 30 degrees and elbows in Schedule 40 PVC conduit runs shall be Schedule 80 PVC conduit. Underground service entrance PVC conduits shall be concrete encased unless otherwise noted. Underground PVC conduits shall be concrete encased under driveways, roadways, parking lots and other paved areas.

Non-encased conduits shall convert to concrete encased ducts under all paved areas and shall extend at least 3 feet beyond the edges of the pavement unless otherwise noted.

The Contractor shall provide a staked centerline or offset for the duct and manhole system - utilizing the drawings and a site inspection of the existing grounds, grades and utility crossings. The Owner and Engineer shall approve the staking plan that shall be indicated on a drawing submitted for approval before starting any excavation for the ducts. The staking plan shall indicate the proposed location, elevation and dimensions of manholes and handholes. The Engineer reserves the right to adjust duct, manhole and handhole locations and elevations before installation at no additional cost to the Owner.

The bottom surface of trenches shall be essentially smooth and free from coarse aggregate.

Install grounding-and-bonding type bushings and bonding jumpers on all service entrance conduits and on all feeder and branch circuit conduits.

Use conduit bushings at each conduit termination. Where No. 4 AWG or larger ungrounded wire is installed, use insulated bushings.

When EMT is allowed, utilize only steel compression fittings. Die-cast and set-screw fittings shall not be used.

Use double lock nuts at each conduit termination. Use weather tight hubs in damp and wet locations. Sealing lock nuts shall not be used.

Grounding continuity to rigid metal conduit shall be accomplished by grounding bushings/adapters with lugs for connection to grounding counterpoise and/or grounding electrode conductor as defined by NEC.

All exposed wiring shall be run in not less than 1/2 inch (12 mm) galvanized rigid steel conduit. All conduits shall be installed to provide for drainage. Conduit shall be attached to wooden structures with galvanized

pipe straps and fastened with galvanized wood screws not less than No. 8 nor less than 1-1/4 inches (31 mm) long. There shall be at least two fastenings for each 10-foot (3 m) length.

Existing ducts may require clearing before use. It is the responsibility of the Contractor to locate the existing ducts, identify empty or partially empty conduits and clear the conduits as required. Where new cable is to be installed in existing duct, the full length of the duct shall be cleared of debris by mechanical means before the installation of the new cable. Acceptable methods of clearing existing ducts include "hydro-jetting" and "roto-rooting." All existing cables in each re-used duct shall be replaced for the length of the duct and properly spliced in a method approved by the Engineer. Clearing of existing duct banks or conduits is incidental to the cable pay item.

Dedicated ground rods shall be installed and exothermically welded to the counterpoise wire at each end of a duct bank crossing under pavement.

For concrete markers, the impression of letters shall be done in a manner, approved by the Engineer, to affect a neat, professional appearance. The letters shall be stenciled neatly. After placement, all markers shall be given one coat of high-visibility aviation orange paint, as approved by the Engineer.

300-3.7 JUNCTION BOXES.

Junction cans shall have both internal and external ground lugs. Size (diameter) and depth shall be as specified in the plans.

Galvanized cans shall have an external ground lug for mechanical connection/bolting ground clamps bonding.

For concrete structures, each cover and frame shall be galvanized and have a spring assisted, latching mechanism allowing one individual to open the manhole hinged cover(s) using the recessed lifting handles. Covers shall be secured by stainless steel penta-head bolts.

300-3.8 BACKFILL, COMPACTION, AND RESTORATION. Refer to the backfill, compaction and restoration requirements within Item P-152 where other compaction requirements are specified (under pavements, embankments, etc.)

Trenches shall be backfilled and compacted in 6" layers to 90% maximum density for cohesive soils and to 100% maximum density for non-cohesive soils, as determined by ASTM D1557. The in-place field density shall be determined in accordance with ASTM D1556, D2167, or D6938.

Backfilling from two directions will not be allowed. No backfilling will be accomplished without the approval of the Engineer or Construction Observer. The Contractor shall ensure all trenches are inspected prior to being covered and prior to encasement. Any uninspected trenches which are prematurely covered shall be exposed for inspection at the Engineer and Owner's convenience at no additional cost to the Owner. The Construction Observer will coordinate with the Contractor for advance scheduling of trench inspection.

Following restoration of all trenching near airport movement surfaces, the Contractor shall thoroughly visually inspect the area for foreign object debris (FOD) and remove any such FOD that is found. This FOD inspection and removal shall be considered incidental to the pay item of which it is a component part.

300-3.9 CABLE AND UTILITY COORDINATION. The existing and the proposed locations of lighting cable are approximate. The Contractor shall be responsible for field locating and identifying the existing lighting circuits to determine their exact routing. The Contractor shall also be responsible for maintaining the lighting systems in a working condition until the new lighting circuits have been installed and tested. The Contractor shall proactively and expeditiously accomplish this cable identification work prior to

performing any modifications to the lighting circuits. Coordinate identification work with the Owner and Engineer and make all corrections, additions, etc. on the as-built drawings.

Underground cable and utilities exist within and adjacent to the limits of construction. An attempt has been made to locate these cables and utilities on the Plans. All existing cable and utilities may not be shown on the Plans and the location of the cables and utilities shown may vary from the location shown on the Plans. Prior to beginning of any type of excavation, the Contractor shall contact the utilities, the airport maintenance staff, FAA field personnel and other organizations as required and make arrangements for the location of the utilities on the ground. The Contractor shall maintain the cable and utility location markings until they are no longer required.

The Contractor shall replace or repair any underground cable or utility that has been damaged by the Contractor during excavation to the satisfaction of the owner of the cable or utility at no additional cost to the Owner.

The Contractor shall be responsible for all coordination work associated with existing and new utilities, their marking, their identification, proposed outages/shutoffs, connections, cutovers, etc.

300-3.10 WIRING. The Contractor shall furnish all labor and materials and shall make complete electrical connections in accordance with the wiring diagram furnished with the project plans. The electrical installation shall conform to the requirements of the latest edition of National Fire Protection Association, NFPA-70, National Electrical Code.

Provide color-coding for phase identification.

Colors for 240/120V Circuits:

a. Phase A: Black
b. Phase B: Red
c. Neutral: White

All new electrical cable shall be marked using color-coded plastic electrical tape, which is specifically designed for application on polyethylene-jacketed cable. The tape shall be applied as detailed on the Plans. Marking tape shall be Scotch 35 Vinyl Plastic tape or approved equal.

300-3.11 MARKING AND LABELING. Properly identify all electrical equipment.

Wire/Cable Designation Tape Markers:

a. Indoor Dry Locations: UL Recognized Materials, vinyl or vinyl-cloth, self-adhesive, wraparound, self-laminating, cable/conductor markers with computer printer-generated numbers and letters, minimum 1" width. Provide Brady B-427 with thermal transfer print type or approved equal.

b. Outdoor Locations and Indoor Wet and Damp Locations: White polyolefin, non-adhesive, full circle, heat-shrinkable sleeve, cable/conductor markers with computer printer-generated numbers and letters, minimum 1" width. Provide Brady B-342 with thermal transfer print type or approved equal.

Install all identification as required by current adopted editions of the NFPA 70 - National Electrical Code and NFPA 70E - Standard for Electrical Safety in the Workplace.

300-3.12 REMOVAL AND RELOCATION OF EXISTING EQUIPMENT. The Contractor shall carefully remove all salvageable equipment as indicated on the Plans. Any equipment which is damaged during the removal operation shall be subject to a reduction in payment for removal of the equipment. All equipment which is removed during this project shall be transported to a site on the Airfield or removed from the Airfield and properly disposed of as directed by the Owner and the Engineer.

The Contractor shall carefully relocate existing equipment as indicated in the Plans. Any equipment that is damaged during the relocation operation shall be replaced at no additional cost to the Owner.

Any existing electrical equipment, conduit, cables, etc. that is damaged during construction shall be replaced at no additional cost to the Owner to the satisfaction of the Owner and the Engineer.

300-3.13 5 kV AND UNDER 600V CABLE CONNECTIONS.

Cable splicing/terminating personnel shall be licensed electricians who have the minimum continuous experience in terminating/splicing medium voltage cable as listed in Item L-108. The qualifications for these airfield lighting cable splicers shall be submitted for review and approval by the Engineer prior to any work. The Engineer may request sample splices be performed in his presence by the proposed personnel to clearly demonstrate that they have the skill and experience to perform this work. Connector kits and cables shall be provided in sufficient quantity by the Contractor in demonstrating these qualifications at no additional cost to the Owner.

Field-attached plug-in splices using FAA certified L-823 plug and receptacle connector kits, properly sized to the cable being used, shall be installed as shown in the plans. This work shall include the taping and heat shrinking. Refer to Item L-108 for additional requirements.

As an option, the Contractor may utilize enhanced FAA certified L-823 connector kits, such as the Amerace 54Super Kit. These kits do not require taping or heat shrinking. These kits shall be installed in accordance with the manufacturer's installation requirements. Note that the mixing of connector kits is unacceptable. The Contractor shall clearly list and submit the connector kits he proposes to utilize on the project for approval prior to any field construction work, and he shall only install that type during construction unless otherwise noted by the Engineer.

For under 600V cable connections of voltage powered circuits, splices whether direct buried or within an underground enclosure shall only utilize approved cast splices, employing a plastic mold and using epoxy resin equivalent to that manufactured by 3M Company, or an approved equivalent.

300-3.14 CERTIFICATION AND PERFORMANCE. Equipment and materials covered by FAA Advisory Circulars are referred to by item numbers and approved equipment is listed within the AC 150/5345-53 Airport Lighting Equipment Certification Program's monthly Addendum, which contains a complete and updated listing of the certified equipment and manufacturers and is listed in the FAA Buy American Preference equipment list, which is also updated monthly. The Contractor shall provide and install new certified equipment that works reliably and efficiently with the existing equipment to remain in service. The Contractor shall provide any additional accessories and/or appurtenances required to provide fully functional electrical systems to the satisfaction of the Owner and Engineer, at no additional cost to the Owner.

The Contractor shall ascertain that all lighting system components furnished (including FAA certified and approved equipment) are compatible in all respects with each other and the remainder of the new and existing systems. Any non-compatible components furnished by the Contractor shall be replaced at no additional cost to the Owner with a similar unit that is approved by the Engineer and compatible with the remainder of the airport lighting system.

300-3.15 AS-BUILT DRAWINGS. The Contractor shall keep one (1) full-sized set of prints for As-Built Drawings at the site, in good order, and annotated to show all changes made during the construction process.

The Contractor shall locate all underground and concealed work, identifying all equipment, conduit, circuit numbers, motors, feeders, breakers, switches, and starters. The Contractor will certify accuracy by endorsement. As-Built drawings shall be correct in every detail, so Owner can properly operate, maintain, and repair exposed and concealed work.

The As-Built drawings shall indicate all control system labeling and marking.

The Contractor shall store the As-Built drawings on the site. Drawings shall not be rolled. Make corrections, additions, etc., with pencil, with date and authorization of change.

As-Built drawings must be submitted to Engineer before project will be accepted.

Minor deviations from the Plans and Specifications shall be as approved by the Engineer.

Upon completion of the installation, the Contractor shall adjust the systems to the satisfaction of the Engineer.

300-3.16 TESTING.

General Electrical Testing: Perform each visual and mechanical inspection and electrical test stated in NETA Acceptance Testing Specification and certify compliance with test parameters. Tests shall be conducted in the presence of the Engineer and shall be to his/her satisfaction. Correct malfunctioning units on-site, where possible, and retest to demonstrate compliance; otherwise, replace with new units and retest. Perform infrared scan tests and inspections of service and power distribution equipment at the respective buildings and provide reports. Electrical equipment will be considered defective if it does not pass tests and inspections. Reports shall include notations of deficiencies, remedial action taken and observations after remedial action.

System and Equipment Testing: All installations shall be fully tested by continuous operation for not less than 24 hours as completed systems prior to acceptance. These tests shall include the functioning of each control not less than 10 times.

Test equipment and instruments utilized by the Contractor shall have been calibrated following the manufacturer's recommended schedule to verify their accuracy prior to performing the testing work. The Contractor shall provide instrument calibration certificates on test equipment when requested by the Engineer. Retesting work due to inaccurate or defective instruments shall be performed by the Contractor to the satisfaction of the Engineer at no additional cost to the Owner.

a. Regulator Calibration:

The Contractor shall check and calibrate both new and existing regulators utilizing the enclosed "Constant Current Regulator Calibration Report". Refer to the material section on constant current regulators for additional requirements.

New regulators are calibrated at the factory prior to shipping, while existing regulators typically need checks and calibrations on a routine basis so that they do not get out of tolerance. The intent is to check and/or calibrate these regulators using a high accuracy meter prior to energizing and placing the airfield lighting system in service.

Utilize a high accuracy true RMS ammeter with high accuracy clamp-on current probe when making these measurements (use round type probes, accuracy + or – 2% required, sized per the cable diameter and circuit ampacity to achieve the best accuracy). Adjust regulators per manufacturer's instructions to meet the output currents on each brightness step as listed in Tables 5-2 and 5-3 in AC 150/5340-26.

b. Megger Testing:

The Contractor shall perform megger testing on each existing regulator circuit prior to any work on the electrical system. This information shall be recorded and documented by the Contractor and submitted to the Engineer. The Contractor shall perform megger tests on each regulator circuit after the acceptance test period. This acceptance test information

shall be recorded and documented by the Contractor and submitted to the Engineer. Megger test shall be performed in accordance with the requirements of Item L-108.

The Contractor shall submit his initial megger test reports on the enclosed "Insulation-Resistance Test Report" form prior to any work on the electrical system. This report shall be submitted to the Engineer and approved by the Owner prior to Contractor proceeding with his work.

After final acceptance testing has been completed, the Contractor shall complete and submit his final megger test reports to the Engineer and insert copies of the initial and final megger test reports in the Operation and Maintenance Manuals.

Megger testing shall be performed using an insulation meter, such as a Fluke 1507 Insulation Resistance Multimeter, Ideal 61-797 Digital Insulation Meter, or approved equal having an insulation test range up to 10 Gigohms or greater.

Insulation resistance testers for 5kV series circuits shall utilize the 1000V DC source output for testing. The test equipment shall be submitted for review and approval by the Engineer prior to performing the tests.

The Contractor shall be responsible to maintain an insulation resistance equal to minimum 80% of the initial testing value through the end of the contract warranty period. This requirement is based on AC 150/5340-26C which states that resistance values inevitably decline over the service life of the circuit and that a 10-20 percent decline per year is considered normal. Note that AC 150/5340-26C cancels AC 150/5340-26B; thus, refer to the current edition of the maintenance AC for requirements in this project.

For existing circuit insulation resistance requirements, refer to "Existing Circuits" section of Item L-108.

The insulation resistance to ground for 600V rated cables shall be not less than 100 Megohms when measured per NETA standards.

The installations shall be tested in operation as a completed unit prior to acceptance. Tests shall include taking megger and voltage readings in accordance with manufacturer's requirements. Testing equipment shall be furnished by the Contractor.

c. Ground Rod Impedance Testing:

The enclosed "Ground Rod Impedance Test Report" form shall be used, and testing shall be performed in the presence of the Engineer.

As-Built drawings shall indicate the location of all installed ground rods. Each ground rod shall have a unique identifier that corresponds with its submitted ground impedance test report.

Three-pole fall-of-potential testers that can measure the ground resistance of a ground rod using auxiliary electrodes (staked testing), such as a Fluke 1621 Earth Ground Tester, shall be used for testing individual dedicated equipment ground rods at fixtures and equipment, or for testing isolated counterpoise ground rods not yet connected to the counterpoise wire.

Clamp-on testers that can measure the ground resistance of a ground rod without using auxiliary ground rods (stakeless testing), such as a Fluke 1630 Earth Ground Clamp Meter or approved equal, shall be used for testing counterpoise ground rods which have

already been connected to the counterpoise wire, or ground ring ground rods which have already been connected to the established ground ring system.

Ground impedance test equipment shall be submitted for review and approval by the Engineer prior to performing the tests.

If the ground rod's impedance exceeds 25 ohms, an additional rod shall be driven in a location suitable and approved by the Engineer. However, the additional rod must satisfy the requirements of NEC 250.53 and not be less than 6 feet away from any other ground rod electrode. Additional ground rods shall not be measured for separate payment but shall be considered subsidiary to the counterpoise or respective equipment pay item.

The Contractor shall perform additional tests if required and requested by the Engineer at no additional cost.

The Contractor shall coordinate with the resident Engineer to approve tests daily before proceeding. The Contractor shall fill out a separate test report for each date. Test reports shall be submitted weekly to the Engineer.

d. Cable Pulling Tension Values Log:

The enclosed "Cable Pulling Tension Values Log" form shall be used for monitoring cable pull tension values in the presence of the Engineer.

Airport lighting equipment and special systems shall be tested in accordance with applicable FAA Advisory Circular requirements and the manufacturer's installation instructions. These tests shall also include those system requirements listed within AC 150/5340-26 Maintenance of Airport Visual Aid Facilities.

300-3.17 INSPECTION FEES AND PERMITS. The Contractor shall obtain and pay for all necessary construction permits, licenses, government charges, and inspection fees necessary for prosecution of the Work. Unless otherwise noted, the Contractor shall pay all charges of utility owners for connections for providing permanent service to the Work, ready for subsequent utility account transfer to the Owner after final acceptance.

300-3.18 WORK SUPERVISION.

State of Missouri: The electrical contractor (whether the general contractor or a subcontractor) shall be a licensed contractor in the state of Missouri having an electrical classification suitable for performing the work required in these contract documents.

The Contractor shall designate in writing the qualified electrical supervisor who shall provide supervision to all electrical work on this project. The minimum qualifications for the electrical supervisor shall be a master electrician as defined by the State of Missouri. The supervisor or his appointed alternate possessing at least a journeyman electrician license shall be on site whenever electrical work is being performed. The qualifications of the electrical supervisor shall be subject to approval of the Owner and the Engineer.

All master and journeyman electricians shall be licensed in accordance with the requirements of the State of Missouri. No unlicensed electrical workers shall perform work on this project. Apprentice electricians in a ratio of not more than one apprentice per journeyman electrician will be allowed if the apprentices are licensed and actively participating in an apprenticeship program recognized and approved by the State of Missouri.

300-3.19 TRAINING. The training classes shall be coordinated with the Owner and Engineer in advance of the final acceptance testing. Comprehensive operational and maintenance training materials shall be provided by the equipment manufacturer and the Contractor (see section 2.3 OPERATION AND MAINTENANCE DATA).

Schedule the training with the Owner at least 10 days in advance and notify the Engineer.

Provide hands-on demonstrations and training of equipment components and functions, including adjusting, operating and maintaining the lighting equipment and systems. Coordinate the training schedule with the Owner in advance, so that the Owner may record the training if desired. Provide 4 hours training for the operational personnel and 4-hours training for the maintenance personnel.

METHOD OF MEASUREMENT

300-4.1 The quantity of lockout/tagout and constant current regulator calibration procedures to be paid for shall consist of all lockout/tagout procedure work and all constant current regulator calibration work completed in place, accepted and ready for operation. This item does not include measurement for constant current regulator equipment.

BASIS OF PAYMENT

300-5.1 Payment will be made at the contract unit price for each complete item, measured as provided above, and accepted by the Engineer. This price shall be full compensation for furnishing all materials and for all preparation, assembly, and installation of these materials, and for all labor, equipment, tools, and incidentals necessary to complete this item to the satisfaction of the Engineer.

Payment will be made under:

Item SS-300-5.1	Lockout/Tagout and Constant Current Regulator Calibration Procedures – per Lump Sum

MATERIAL REQUIREMENTS

Commercial Item Description A-A-59544	Cable and Wire, Electrical (Power, Fixed Installation)
Fed. Spec. W-C-1094	Conduit and Conduit Fittings; Plastic, Rigid
Fed. Spec. W-P-115	Panel, Power Distribution
Fed. Std. 595	Colors
Underwriters Laboratories Standard 6	Rigid Metal Conduit
Underwriters Laboratories Standard 514	Fittings for Conduit and Outlet Boxes
Underwriters Laboratories Laboratories Standard 651	Schedule 40 and 80 Rigid PVC Conduit (for Direct Burial)

Underwriters Laboratories Standard 1242	Intermediate Metal Conduit
CFR 1910	Occupational Safety and Health Regulations
CFR 1926	Safety and Health Regulations for Construction
ANSI/IEEE C2	National Electrical Safety Code
NFPA 70	National Electrical Code (NEC)
NFPA 70E	Standard for Electrical Safety in the Workplace
NFPA 101	Life Safety Code
NFPA 780	Standard for the Installation of Lightning Protection Systems
29 CFR 1910	Occupational Safety and Health Standards (OSHA)
29 CFR 1926	Safety and Health Regulations for Construction
Jaquith Industries, Inc.	The Design, Installation, and Maintenance of In-Pavement Airport Lighting

FAA ADVISORY CIRCULARS

AC 150/5340-26	Maintenance of Airport Visual Aid Facilities
AC 150/5340-30	Design and Installation Details for Airport Visual Aids
AC 150/5345-7	Specification for L-824 for Underground Electrical Cable for Airport Lighting Circuits
AC 150/5345-10	Specification for Constant Current Regulators and Regulator Monitors
AC 150/5345-26	Specification for L-823 Plug and Receptacle, Cable Connectors
AC 150/5345-39	Specification for L-853 Runway and Taxiway Retroreflective Markers
AC 150/5345-42	Specification for Airport Light Base and Transformer Housings, Junction Boxes, and Accessories
AC 150/5345-53	Airport Lighting Equipment Certification Program

END OF ITEM SS-300

GROUND ROD IMPEDANCE TEST REPORT

Owner / Sponsor: _____

Engineer: Garver, LLC _____

Airport: _____

Contractor: _____

Project Title: _____

Garver Project Number: _____

Date: _____

Weather / Site Conditions: _____

Fall-of-Potential Style Tester (F):
Manufacturer: _____

Model #: _____

Clamp-On Style Tester (C):
Manufacturer: _____

Model #: _____

Ground Rod #	Test Equipment Style (F or C)	Impedance Value (Ohms)	Ground Rod #	Test Equipment Style (F or C)	Impedance Value (Ohms)

Tested By:	
Engineer Witness:	

Provide signature/date in the fields above.

CABLE PULLING TENSION VALUES LOG

Owner / Sponsor: _____

Engineer: Garver, LLC

Airport: _____

Contractor: _____

Project Title: _____

Garver Project Number: _____

Date: _____

Weather / Site Conditions: _____

Dynamometer
Manufacturer/Model #: _____

Cable / Wire
Manufacturer: _____

From / To Locations	Wire/Cable Size	Length of Pull	Pull Method	Maximum Value	Measured Value
Tested By:					
Engineer Witness:					

Provide signature/date in the fields above.

Page _____ of _____

PAGE INTENTIONALLY LEFT BLANK

ITEM SS-301 ELECTRICAL DEMOLITION AND RELOCATION WORK

DESCRIPTION

301-1.1 This item shall consist of the removal and satisfactory disposal of items, all of which are not designated or permitted to remain, in accordance with this specification, the referenced specifications and drawings, and applicable advisory circulars. This work shall include the removal of indicated equipment, materials, and incidentals necessary for a complete item removal, including all restoration work, as a completed unit to the satisfaction of the Engineer.

301-1.2 The Contractor shall maintain current copies of all referenced and applicable standards on the job site. The Contractor is responsible to make known to the Engineer any conflict between plans and specifications that he observes or of which he is made aware.

MATERIALS

301-2.1 All backfill and repair materials used in electrical demolition, repair and restoration work shall comply with the referenced specifications and be approved by the Engineer.

Airport lighting equipment and materials shall meet the requirements outlined in Item SS-300 and Item L-125.

For pre-cast or prefabricated concrete encased light base installations, the Contractor shall submit and coordinate the construction of the proposed pre-cast units with the Engineer onsite to review and approve the construction process. The Contractor shall submit his proposed installation process for review and approval by the Engineer. The Contractor shall provide additional items and work if required and requested by the Engineer for the construction and installation of the pre-cast units at no additional cost to the Owner.

CONSTRUCTION METHODS

301-3.1 GENERAL. No demolition shall be started until the removal and/or relocation work has been laid out and approved by the Engineer. All material shall be disposed of off-site. All hauling and disposal will be considered a necessary and incidental part of the work. Hauling cost shall be considered by the Contractor and included in the contract unit price for the pay of items of work involved. No payment will be made separately or directly for hauling on any part of the work.

Equipment removal shall typically include removing the equipment and its accessories, removing foundations/pads, removing existing conduits, conductors and appurtenances, removal of conduit to below grade, and removal of existing circuits back to source. The work shall include restoring the area to match existing, including filling and tamping all holes with earth, and clearing and leveling the site.

The Contractor shall remove all existing underground cable, which is unused or rendered unusable by this project, when such is exposed or made accessible during this work. All such wiring removed shall become property of the Contractor and shall be immediately removed from the project. Wiring in conduit shall be removed as indicated or if new wiring is shown to be installed in its place. Existing wiring shall not be reused or reinstalled.

Wiring not exposed shall be abandoned in place, if a reasonable effort will not remove it. No measurement or payment will be made for this cable removal work. Damage to turf or other systems will not be permitted to salvage or retrieve existing cable.

Any damage to electrical equipment, systems, structures, conduits, cables, and accessories or other utilities, designated to remain in place, shall be repaired or replaced expeditiously at no additional cost to

the Owner and to the satisfaction of the Owner and Engineer.

Holes, ditches, or other abrupt changes in elevation caused by the removal operations that could obstruct drainage or be considered hazardous or unsightly shall be backfilled, compacted, and left in a workmanlike condition.

Trenches or voids resulting from the removal or demolition of existing electrical equipment or other structures shall be filled with approved material placed in layers in accordance with Item P-152.

Concrete foundations and pads to be removed shall be obliterated full depth.

301-3.2 REMOVAL OF EXISTING EQUIPMENT. The Contractor shall carefully remove all salvageable equipment as indicated in the plans. Any equipment that is damaged during the removal and/or relocation operation shall be subject to a reduction in payment for removal and/or relocation of the equipment. All equipment that is removed during this project shall be transported to a site on the Airfield or removed from the Airfield and properly disposed of as directed by the Owner and the Engineer.

301-3.3 CLEARING OF EXISTING DUCT BANKS OR CONDUITS. Where new cable is to be installed in an existing duct bank or conduit, the full length of the duct bank or conduit shall be cleared of debris by mechanical means before installation of the new cable. Acceptable means of clearing existing duct banks or conduits may include using a mandrel, "hydro-jetting" method, or "roto-rooting" method as approved by the Engineer.

Where existing cables are being removed from an existing duct bank or conduit and replaced with new cables, the Contractor shall use the existing cable to clear the conduit and to pull in the new cable. No separate payment will be made for clearing these duct banks or conduits or for the existing cable removal. Clearing of these existing duct banks or conduits is incidental to the cable pay item unless otherwise noted.

METHOD OF MEASUREMENT / BASIS OF PAYMENT

301-4.1 Separate measurement and payment shall not be made, but shall be considered subsidiary to other items of work. This includes all conduit and cable cuts and any incidental conduit or cable removal.

END OF ITEM SS-301

ITEM SS-310 AIRPORT LIGHTING SYSTEMS

DESCRIPTION

310-1.1 This item shall consist of furnishing and installing airport taxiway edge reflector systems, and other equipment, in accordance with this specification, the referenced specifications and drawings, and applicable advisory circulars. The system shall be installed at the locations and in accordance with the dimensions, design and details shown on the plans. This work shall include the furnishing of all equipment, materials, services and incidentals necessary to place it in operating condition as a completed unit to the satisfaction of the Engineer.

310-1.2 The Contractor shall maintain current copies of all referenced and applicable standards on the job site. The Contractor is responsible to make known to the Engineer any conflict between plans and specifications that he observes or of which he is made aware.

EQUIPMENT AND MATERIALS

310-2.1 GENERAL.

a. Airport lighting equipment and materials shall meet the requirements outlined in Item SS-300 and the applicable Item L Series Specifications.

b. For pre-cast or prefabricated concrete encased light base installations, the Contractor shall submit and coordinate the construction of the proposed pre-cast units with the Engineer onsite to review and approve the construction process. The Contractor shall submit his proposed installation process for review and approval by the Engineer. The Contractor shall provide additional items and work if required and requested by the Engineer for the construction and installation of the pre-cast units at no additional cost to the Owner.

Pre-cast or prefabricated concrete encased light bases may only be assembled at the Contactor's staging area at the airport to allow the Engineer to check and approve all such construction items. Pre-cast bases assembled offsite will not be allowed.

310-2.2 ELEVATED RETROREFLECTIVE MARKERS. Elevated retroreflective markers shall be L-853 retroreflective markers, meeting the criteria set forth in the latest AC 150/5345-39, Runway and Taxiway Retroreflective Markers.

Elevated retroreflective markers shall be Type II, elevated markers for edge marking. Post shall be neutral color with reflective material of color stated below. Overall height of the retroreflective marker shall be 14" above grade. Provide concrete pad for mounting markers in unpaved areas.

Exact options shall be specified by the Owner and Engineer during shop drawing submittal review.

Provide 10 percent spare markers of each type installed. Spare markers shall not be measured for separate payment but shall be considered subsidiary to the respective marker pay items.

CONSTRUCTION METHODS

310-3.1 GENERAL. The installation and testing details for the lighting system shall be as specified in the applicable advisory circulars.

The Contractor is responsible for all surveying and measurement which is required to accurately position and aim airfield lighting systems and equipment.

Airfield lighting systems and equipment that are improperly installed shall be removed and re-installed correctly as directed by the Engineer. No payment will be made for the removal and reinstallation of airfield lighting systems and equipment improperly installed. All remedial work shall be to the satisfaction of the Engineer.

310-3.2 REFLECTOR LAYOUT PLANS. The Contractor shall stake the airfield reflector systems, prior to installation of any trench, cable or lighting apparatus. The intent is to stake the installation at the locations indicated, noting any deviation from plan dimensions to the Engineer prior to installation. The Contractor shall obtain the services of an experienced and licensed surveyor to perform this work.

The Engineer shall provide electronic CADD files to the Contractor for this staking work. The Contractor shall stake the items and his surveyor shall provide a CADD file submittal back to the Engineer. Based upon this submittal, the Engineer shall coordinate and provide directions on any adjustments necessary to meet existing field condition requirements and comply with FAA Advisory Circular requirements on the layout and spacing of equipment.

The Contractor and his surveyor shall then make any electronic CADD file spacing adjustments and/or field staking adjustments prior to installation at no additional cost to the Owner.

Refer to General Provisions Section 50 Control of Work for additional construction layout and staking requirements.

310-3.3 RETROREFLECTIVE MARKER INSTALLATION. All markers shall be installed at locations indicated in the plans. Markers shall be laid out by locating the two control points by station as indicated on the plans and measuring the indicated individual separation distances. Markers shall be located within 1 inch +/- longitudinally and 0.5 inches +/- transversely of the location indicated unless deviation is approved by the Engineer. Install markers in accordance with manufacturer's instructions/recommendations and ensure elevated markers are plumb to vertical when installed.

Where elevated markers are to be installed with concrete pad, the pad shall be 24" W x 24" L x 6" D and be composed of 3500 PSI concrete. Concrete pad shall be finished with 1" chamfer on all edges and installed so that 1" of the pad is elevated above grade. Markers shall be mounted to concrete pad utilizing manufacturer's recommended surface mount base and approved epoxy. Contractor shall install pad level with the surrounding grade and, following marker installation, restore the disturbed surrounding area.

310-3.4 TESTING. The installation shall be tested in operation as a completed unit prior to acceptance. Tests shall include taking megger and voltage readings as outlined in Item SS-300 and Item L-108. Testing equipment shall be furnished by the Contractor. Refer to Item L-108 for additional test requirements.

Tests shall be conducted in the presence of the Engineer and shall be to his/her satisfaction.

All installations shall be fully tested by continuous operation for not less than 24 hours as completed systems prior to acceptance. These tests shall include the functioning of each control not less than 10 times.

Equipment and materials covered by FAA Advisory Circulars are referred to by item numbers and approved equipment is listed within the AC 150/5345-53 Airport Lighting Equipment Certification Program's monthly Addendum, which contains a complete and updated listing of the certified equipment and manufacturers, and is listed in the FAA Buy American Preference equipment list, which is also updated monthly. The Contractor shall provide and install new certified equipment that works reliably and

efficiently with the existing equipment to remain in service. The Contractor shall provide any additional accessories and/or appurtenances required to provide fully functional electrical systems to the satisfaction of the Owner and Engineer, at no additional cost to the Owner.

The Contractor shall ascertain that all lighting system components furnished (including FAA certified and approved equipment) are compatible in all respects with each other and the remainder of the new and existing systems. Any non-compatible components furnished by the Contractor shall be replaced at no additional cost to the Owner with a similar unit that is approved by the Engineer and compatible with the remainder of the airport lighting system.

METHOD OF MEASUREMENT / BASIS OF PAYMENT

310-4.1 Measurement and payment for relevant equipment installed is covered within specification L-125.

END OF ITEM SS-310

PAGE INTENTIONALLY LEFT BLANK

ITEM C-100 CONTRACTOR QUALITY CONTROL PROGRAM (CQCP)

100-1 General. Quality is more than test results. Quality is the combination of proper materials, testing, workmanship, equipment, inspection, and documentation of the project. Establishing and maintaining a culture of quality is key to achieving a quality project. The Contractor shall establish, provide, and maintain an effective Contractor Quality Control Program (CQCP) that details the methods and procedures that will be taken to assure that all materials and completed construction required by this contract conform to contract plans, technical specifications and other requirements, whether manufactured by the Contractor, or procured from subcontractors or vendors. Although guidelines are established and certain minimum requirements are specified here and elsewhere in the contract technical specifications, the Contractor shall assume full responsibility for accomplishing the stated purpose.

The Contractor shall establish a CQCP that will:

a. Provide qualified personnel to develop and implement the CQCP.

b. Provide for the production of acceptable quality materials.

c. Provide sufficient information to assure that the specification requirements can be met.

d. Document the CQCP process.

The Contractor shall not begin any construction or production of materials to be incorporated into the completed work until the CQCP has been reviewed and approved by the Resident Project Representative (RPR). No partial payment will be made for materials subject to specific quality control (QC) requirements until the CQCP has been reviewed and approved.

The QC requirements contained in this section and elsewhere in the contract technical specifications are in addition to and separate from the quality assurance (QA) testing requirements. QA testing requirements are the responsibility of the RPR or Contractor as specified in the specifications.

A Quality Control (QC)/Quality Assurance (QA) workshop with the Engineer, Resident Project Representative (RPR), Contractor, subcontractors, testing laboratories, and Owner's representative must be held prior to start of construction, *and may be held in conjunction with the preconstruction meeting*. The QC/QA workshop will be facilitated by the Contractor. The Contractor shall coordinate with the Airport and the RPR on time and location of the QC/QA workshop. Items to be addressed, at a minimum, will include:

a. Review of the CQCP including submittals, QC Testing, Action & Suspension Limits for Production, Corrective Action Plans, Distribution of QC reports, and Control Charts.

b. Discussion of the QA program.

c. Discussion of the QC and QA Organization and authority including coordination and information exchange between QC and QA.

d. Establish regular meetings to discuss control of materials, methods and testing.

e. Establishment of the overall QC culture.

100-2 Description of program.

a. General description. The Contractor shall establish a CQCP to perform QC inspection and testing of all items of work required by the technical specifications, including those performed by subcontractors. The CQCP shall ensure conformance to applicable specifications and plans with respect to materials, off-site fabrication, workmanship, construction, finish, and functional performance. The CQCP shall be effective for control of all construction work performed under this Contract and shall specifically include surveillance and tests required by the technical specifications, in addition to other requirements of this section and any other activities deemed necessary by the Contractor to establish an effective level of QC.

b. Contractor Quality Control Program (CQCP). The Contractor shall describe the CQCP in a written document that shall be reviewed and approved by the RPR prior to the start of any production, construction, or off-site fabrication. The written CQCP shall be submitted to the RPR for review and approval at least 10 calendar days before the CQCP Workshop. The Contractor's CQCP and QC testing laboratory must be approved in writing by the RPR prior to the Notice to Proceed (NTP).

The CQCP shall be organized to address, as a minimum, the following:

1. QC organization and resumes of key staff
2. Project progress schedule
3. Submittals schedule
4. Inspection requirements
5. QC testing plan
6. Documentation of QC activities and distribution of QC reports
7. Requirements for corrective action when QC and/or QA acceptance criteria are not met
8. Material quality and construction means and methods. Address all elements applicable to the project that affect the quality of the pavement structure including subgrade, subbase, base, and surface course. Some elements that must be addressed include, but is not limited to mix design, aggregate grading, stockpile management, mixing and transporting, placing and finishing, quality control testing and inspection, smoothness, laydown plan, equipment, and temperature management plan.

The Contractor must add any additional elements to the CQCP that is necessary to adequately control all production and/or construction processes required by this contract.

100-3 CQCP organization. The CQCP shall be implemented by the establishment of a QC organization. An organizational chart shall be developed to show all QC personnel, their authority, and how these personnel integrate with other management/production and construction functions and personnel.

The organizational chart shall identify all QC staff by name and function, and shall indicate the total staff required to implement all elements of the CQCP, including inspection and testing for each item of work. If necessary, different technicians can be used for specific inspection and testing functions for different items of work. If an outside organization or independent testing laboratory is used for implementation of all or part of the CQCP, the personnel assigned shall be subject to the qualification requirements of paragraphs 100-03a and 100-03b. The organizational chart shall indicate which personnel are Contractor employees and which are provided by an outside organization.

The QC organization shall, as a minimum, consist of the following personnel:

a. Program Administrator. The Contractor Quality Control Program Administrator (CQCPA) must be a full-time employee of the Contractor, or a consultant engaged by the Contractor. The CQCPA must have a minimum of five (5) years of experience in QC pavement construction with prior QC experience on a project of comparable size and scope as the contract.

Included in the five (5) years of paving/QC experience, the CQCPA must meet at least one of the following requirements:

(1) Professional Engineer with one (1) year of airport paving experience.

(2) Engineer-in-training with two (2) years of airport paving experience.

(3) National Institute for Certification in Engineering Technologies (NICET) Civil Engineering Technology Level IV, with three (3) years of airport paving experience.

(4) An individual with four (4) years of airport paving experience, with a Bachelor of Science Degree in Civil Engineering, Civil Engineering Technology or Construction.

Certification at an equivalent level of qualification and experience by a state or nationally recognized organization will be acceptable in lieu of NICET certification.

The CQCPA must have full authority to institute any and all actions necessary for the successful implementation of the CQCP to ensure compliance with the contract plans and technical specifications. The CQCPA authority must include the ability to immediately stop production until materials and/or processes are in compliance with contract specifications. The CQCPA must report directly to a principal officer of the construction firm. The CQCPA may supervise the Quality Control Program on more than one project provided that person can be at the job site within two (2) hours after being notified of a problem.

b. QC technicians. A sufficient number of QC technicians necessary to adequately implement the CQCP must be provided. These personnel must be either Engineers, engineering technicians, or experienced craftsman with qualifications in the appropriate field equivalent to NICET Level II in Civil Engineering Technology or higher, and shall have a minimum of two (2) years of experience in their area of expertise.

The QC technicians must report directly to the CQCPA and shall perform the following functions:

(1) Inspection of all materials, construction, plant, and equipment for conformance to the technical specifications, and as required by paragraph 100-6.

(2) Performance of all QC tests as required by the technical specifications and paragraph100-8.

(3) Performance of tests for the RPR when required by the technical specifications.

Certification at an equivalent level of qualification and experience by a state or nationally recognized organization will be acceptable in lieu of NICET certification.

c. Staffing levels. The Contractor shall provide sufficient qualified QC personnel to monitor each work activity at all times. Where material is being produced in a plant for incorporation into the work, separate plant and field technicians shall be provided at each plant and field placement location. The scheduling and coordinating of all inspection and testing must match the type and pace of work activity. The CQCP shall state where different technicians will be required for different work elements.

100-4 Project progress schedule. Critical QC activities must be shown on the project schedule as required by Section 80, paragraph 80-03, *Execution and Progress*.

100-5 Submittals schedule. The Contractor shall submit a detailed listing of all submittals (for example, mix designs, material certifications) and shop drawings required by the technical specifications. The listing can be developed in a spreadsheet format and shall include as a minimum:

a. Specification item number

b. Item description

c. Description of submittal

d. Specification paragraph requiring submittal

e. Scheduled date of submittal

100-6 Inspection requirements. QC inspection functions shall be organized to provide inspections for all definable features of work, as detailed below. All inspections shall be documented by the Contractor as specified by paragraph 100-9.

Inspections shall be performed as needed to ensure continuing compliance with contract requirements until completion of the particular feature of work. Inspections shall include the following minimum requirements:

a. During plant operation for material production, QC test results and periodic inspections shall be used to ensure the quality of aggregates and other mix components, and to adjust and control mix proportioning

to meet the approved mix design and other requirements of the technical specifications. All equipment used in proportioning and mixing shall be inspected to ensure its proper operating condition. The CQCP shall detail how these and other QC functions will be accomplished and used.

b. During field operations, QC test results and periodic inspections shall be used to ensure the quality of all materials and workmanship. All equipment used in placing, finishing, and compacting shall be inspected to ensure its proper operating condition and to ensure that all such operations are in conformance to the technical specifications and are within the plan dimensions, lines, grades, and tolerances specified. The CQCP shall document how these and other QC functions will be accomplished and used.

100-7 Contractor QC testing facility.

a. For projects that include Item P-401, Item P-403, and Item P-404, the Contractor shall ensure facilities, including all necessary equipment, materials, and current reference standards, are provided that meet requirements in the following paragraphs of ASTM D3666, *Standard Specification for Minimum Requirements for Agencies Testing and Inspecting Road and Paving Materials*:

- 8.1.3 Equipment Calibration and Checks;
- 8.1.9 Equipment Calibration, Standardization, and Check Records;
- 8.1.12 Test Methods and Procedures

b. For projects that include P-501, the Contractor shall ensure facilities, including all necessary equipment, materials, and current reference standards, are provided that meet requirements in the following paragraphs of ASTM C1077, Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation:

- 7 Test Methods and Procedures
- 8 Facilities, Equipment, and Supplemental Procedures

100-8 QC testing plan. As a part of the overall CQCP, the Contractor shall implement a QC testing plan, as required by the technical specifications. The testing plan shall include the minimum tests and test frequencies required by each technical specification Item, as well as any additional QC tests that the Contractor deems necessary to adequately control production and/or construction processes.

The QC testing plan can be developed in a spreadsheet fashion and shall, as a minimum, include the following:

a. Specification item number (e.g., P-401)

b. Item description (e.g., Hot Mix Asphalt Pavements)

c. Test type (e.g., gradation, grade, asphalt content)

d. Test standard (e.g., ASTM or American Association of State Highway and Transportation Officials (AASHTO) test number, as applicable)

e. Test frequency (e.g., as required by technical specifications or minimum frequency when requirements are not stated)

f. Responsibility (e.g., plant technician)

g. Control requirements (e.g., target, permissible deviations)

The QC testing plan shall contain a statistically-based procedure of random sampling for acquiring test samples in accordance with ASTM D3665. The RPR shall be provided the opportunity to witness QC sampling and testing.

All QC test results shall be documented by the Contractor as required by paragraph 100-9.

100-9 Documentation. The Contractor shall maintain current QC records of all inspections and tests performed. These records shall include factual evidence that the required QC inspections or tests have been performed, including type and number of inspections or tests involved; results of inspections or tests; nature of defects, deviations, causes for rejection, etc.; proposed remedial action; and corrective actions taken.

These records must cover both conforming and defective or deficient features, and must include a statement that all supplies and materials incorporated in the work are in full compliance with the terms of the contract. Legible copies of these records shall be furnished to the RPR daily. The records shall cover all work placed subsequent to the previously furnished records and shall be verified and signed by the CQCPA.

Contractor QC records required for the contract shall include, but are not necessarily limited to, the following records:

a. Daily inspection reports. Each Contractor QC technician shall maintain a daily log of all inspections performed for both Contractor and subcontractor operations. These technician's daily reports shall provide factual evidence that continuous QC inspections have been performed and shall, as a minimum, include the following:

(1) Technical specification item number and description
(2) Compliance with approved submittals
(3) Proper storage of materials and equipment
(4) Proper operation of all equipment
(5) Adherence to plans and technical specifications
(6) Summary of any necessary corrective actions
(7) Safety inspection.
(8) Photographs and/or video

The daily inspection reports shall identify all QC inspections and QC tests conducted, results of inspections, location and nature of defects found, causes for rejection, and remedial or corrective actions taken or proposed.

The daily inspection reports shall be signed by the responsible QC technician and the CQCPA. The RPR shall be provided at least one copy of each daily inspection report on the work day following the day of record. When QC inspection and test results are recorded and transmitted electronically, the results must be archived.

b. Daily test reports. The Contractor shall be responsible for establishing a system that will record all QC test results. Daily test reports shall document the following information:

(1) Technical specification item number and description
(2) Test designation
(3) Location
(4) Date of test
(5) Control requirements
(6) Test results
(7) Causes for rejection
(8) Recommended remedial actions
(9) Retests

Test results from each day's work period shall be submitted to the RPR prior to the start of the next day's work period. When required by the technical specifications, the Contractor shall maintain statistical QC charts. When QC daily test results are recorded and transmitted electronically, the results must be archived.

100-10 Corrective action requirements. The CQCP shall indicate the appropriate action to be taken when a process is deemed, or believed, to be out of control (out of tolerance) and detail what action will be taken to bring the process into control. The requirements for corrective action shall include both general requirements for operation of the CQCP as a whole, and for individual items of work contained in the technical specifications.

The CQCP shall detail how the results of QC inspections and tests will be used for determining the need for corrective action and shall contain clear rules to gauge when a process is out of control and the type of correction to be taken to regain process control.

When applicable or required by the technical specifications, the Contractor shall establish and use statistical QC charts for individual QC tests. The requirements for corrective action shall be linked to the control charts.

100-11 Inspection and/or observations by the RPR. All items of material and equipment are subject to inspection and/or observation by the RPR at the point of production, manufacture or shipment to determine if the Contractor, producer, manufacturer or shipper maintains an adequate QC system in conformance with the requirements detailed here and the applicable technical specifications and plans. In addition, all items of materials, equipment and work in place shall be subject to inspection and/or observation by the RPR at the site for the same purpose.

Inspection and/or observations by the RPR does not relieve the Contractor of performing QC inspections of either on-site or off-site Contractor's or subcontractor's work.

100-12 Noncompliance.

a. The Resident Project Representative (RPR) will provide written notice to the Contractor of any noncompliance with their CQCP. After receipt of such notice, the Contractor must take corrective action.

b. When QC activities do not comply with either the CQCP or the contract provisions or when the Contractor fails to properly operate and maintain an effective CQCP, and no effective corrective actions have been taken after notification of non-compliance, the RPR will recommend the Owner take the following actions:

(1) Order the Contractor to replace ineffective or unqualified QC personnel or subcontractors and/or

(2) Order the Contractor to stop operations until appropriate corrective actions are taken.

METHOD OF MEASUREMENT

100-13 Basis of measurement and payment. Contractor Quality Control Program (CQCP) is for the personnel, tests, facilities and documentation required to implement the CQCP. The CQCP will be paid as a lump sum with the following schedule of partial payments:

a. With first pay request, 20% with approval of CQCP and completion of the Quality Control (QC)/Quality Assurance (QA) workshop.

b. When 50% or more of the original contract is earned, an additional 30%.

c. When 75% or more of the original contract is earned, an additional 40%

d. After final inspection and acceptance of project, the final 10%.

BASIS OF PAYMENT

100-14 Payment will be made under:

Item C-100-14.1 Contractor Quality Control Program – Lump Sum

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

National Institute for Certification in Engineering Technologies (NICET)

ASTM International (ASTM)

ASTM C1077	Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation
ASTM D3665	Standard Practice for Random Sampling of Construction Materials
ASTM D3666	Standard Specification for Minimum Requirements for Agencies Testing and Inspecting Road and Paving Materials

END OF ITEM C-100

PAGE INTENTIONALLY LEFT BLANK

ITEM C-102 TEMPORARY AIR AND WATER POLLUTION, SOIL EROSION, AND SILTATION CONTROL

DESCRIPTION

102-1.1 This item shall consist of temporary control measures as shown on the plans or as ordered by the Resident Project Representative (RPR) during the life of a contract to control pollution of air and water, soil erosion, and siltation through the use of silt fences, berms, dikes, dams, sediment basins, fiber mats, gravel, mulches, grasses, slope drains, and other erosion control devices or methods.

Temporary erosion control shall be in accordance with the approved erosion control plan; the approved Construction Safety and Phasing Plan (CSPP) and AC 150/5370-2, *Operational Safety on Airports During Construction*. The temporary erosion control measures contained herein shall be coordinated with the permanent erosion control measures specified as part of this contract to the extent practical to assure economical, effective, and continuous erosion control throughout the construction period.

Temporary control may include work outside the construction limits such as borrow pit operations, equipment and material storage sites, waste areas, and temporary plant sites.

Temporary control measures shall be designed, installed and maintained to minimize the creation of wildlife attractants that have the potential to attract hazardous wildlife on or near public-use airports.

***102-1.2** This item covers the application of Temporary Erosion Control items at locations shown on the Plans, as directed by the Engineer, and as required for permit compliance, and the requirement of the Contractor to produce, execute, and maintain a specific Storm Water Pollution Prevention Plan (SWPPP) for the project. The Contractor will also be required to request and obtain all necessary federal, state, and local permits. The temporary erosion control measures shown in the Plans do not represent the extent of work and coordination required by the Contractor under this item.*

MATERIALS

102-2.1 Grass. Grass that will not compete with the grasses sown later for permanent cover per Item T-901 shall be a quick-growing species (such as ryegrass, Italian ryegrass, or cereal grasses) suitable to the area providing a temporary cover. Selected grass species shall not create a wildlife attractant.

102-2.2 Mulches. Mulches may be hay, straw, fiber mats, netting, bark, wood chips, or other suitable material reasonably clean and free of noxious weeds and deleterious materials per Item T-908. Mulches shall not create a wildlife attractant.

102-2.3 Fertilizer. Fertilizer shall be a standard commercial grade and shall conform to all federal and state regulations and to the standards of the Association of Official Agricultural Chemists.

102-2.4 Slope drains. Slope drains may be constructed of pipe, fiber mats, rubble, concrete, asphalt, or other materials that will adequately control erosion.

102-2.5 Silt fence. Silt fence shall consist of polymeric filaments which are formed into a stable network such that filaments retain their relative positions. Synthetic filter fabric shall contain ultraviolet ray inhibitors and stabilizers to provide a minimum of six months of expected usable construction life. Silt fence shall meet the requirements of ASTM D6461.

102-2.6 Other. All other materials shall meet ~~commercial grade standards and shall be approved by the RPR before being incorporated into the project.~~ *be in accordance with SECTION 806 – POLLUTION, EROSION AND SEDIMENT CONTROL of the Standard Specifications, except as modified or augmented herein. Heavy Duty silt fencing (with welded wire in the fabric) may be required on steep slopes if the Engineer determines that the silt fence used by the Contractor is not performing satisfactory.*

CONSTRUCTION REQUIREMENTS

102-3.1 General. In the event of conflict between these requirements and pollution control laws, rules, or regulations of other federal, state, or local agencies, the more restrictive laws, rules, or regulations shall apply.

The ~~*RPR*~~ *Contractor* shall be responsible for assuring compliance to the extent that construction practices, construction operations, and construction work are involved.

102-3.2 Schedule. Prior to the start of construction, the Contractor shall submit schedules in accordance with the approved Construction Safety and Phasing Plan (CSPP) and the plans for accomplishment of temporary and permanent erosion control work for clearing and grubbing; grading; construction; paving; and structures at watercourses. The Contractor shall also submit a proposed method of erosion and dust control on haul roads and borrow pits and a plan for disposal of waste materials. Work shall not be started until the erosion control schedules and methods of operation for the applicable construction have been accepted by the RPR.

102-3.3 Construction details. The Contractor will be required to incorporate all permanent erosion control features into the project at the earliest practicable time as outlined in the plans and approved CSPP. Except where future construction operations will damage slopes, the Contractor shall perform the permanent seeding and mulching and other specified slope protection work in stages, as soon as substantial areas of exposed slopes can be made available. Temporary erosion and pollution control measures will be used to correct conditions that develop during construction that were not foreseen during the design stage; that are needed prior to installation of permanent control features; or that are needed temporarily to control erosion that develops during normal construction practices, but are not associated with permanent control features on the project.

Where erosion may be a problem, schedule and perform clearing and grubbing operations so that grading operations and permanent erosion control features can follow immediately if project conditions permit. Temporary erosion control measures are required if permanent measures cannot immediately follow grading operations. The RPR shall limit the area of clearing and grubbing, excavation, borrow, and embankment operations in progress, commensurate with the Contractor's capability and progress in keeping the finish grading, mulching, seeding, and other such permanent control measures current with the accepted schedule. If seasonal limitations make such coordination unrealistic, temporary erosion control measures shall be taken immediately to the extent feasible and justified as directed by the RPR.

The Contractor shall provide immediate permanent or temporary pollution control measures to minimize contamination of adjacent streams or other watercourses, lakes, ponds, or other areas of water impoundment as directed by the RPR. If temporary erosion and pollution control measures are required due to the Contractor's negligence, carelessness, or failure to install permanent controls as a part of the work as scheduled or directed by the RPR, the work shall be performed by the Contractor and the cost shall be incidental to this item.

The RPR may increase or decrease the area of erodible earth material that can be exposed at any time based on an analysis of project conditions.

The erosion control features installed by the Contractor shall be maintained by the Contractor during the construction period.

Provide temporary structures whenever construction equipment must cross watercourses at frequent intervals. Pollutants such as fuels, lubricants, bitumen, raw sewage, wash water from concrete mixing operations, and other harmful materials shall not be discharged into any waterways, impoundments or into natural or manmade channels.

102-3.4 Installation, maintenance and removal of silt fence. Silt fences shall extend a minimum of 16 inches and a maximum of 34 inches above the ground surface. Posts shall be set no more than 10 feet on center. Filter fabric shall be cut from a continuous roll to the length required minimizing joints where possible. When joints are necessary, the fabric shall be spliced at a support post with a minimum 12-inch overlap and securely sealed. A trench shall be excavated approximately 4 inches deep by 4 inches wide

on the upslope side of the silt fence. The trench shall be backfilled and the soil compacted over the silt fence fabric. The Contractor shall remove and dispose of silt that accumulates during construction and prior to establishment of permanent erosion control. The fence shall be maintained in good working condition until permanent erosion control is established. Silt fence shall be removed upon approval of the RPR.

102-3.5 Construction Methods. *Providing the temporary erosion control items and devices shown on the Plans is intended to minimize the erosion of soils during construction. However, the items and devices shown are not intended to represent all of the necessary items or procedures required to be implemented by the Contractor. The plans and specifications show the Engineer's estimate of a minimum effort needed to maintain proper erosion control during construction. Additional effort and materials may be required by the Contractor to minimize the erosion of soils during construction. It shall be the Contractor's responsibility to install and maintain all the items shown in the Plans and to coordinate, submit, obtain, and comply with all necessary Federal, State, and local permits. The coordination with governing agencies shall include, but not limited to the following:*

- *Filing the Notice of Intent with the Missouri Department of Natural Resource e-permitting site,*
- *Producing and maintaining an approved Storm Water Pollution Prevention Plan,*
- *Coordinating and obtaining all local permits regarding grading operations for the proposed improvements, Contractor's staging area, spoil placement and any other grading operations related to the project as directed by the local governing agency.*

METHOD OF MEASUREMENT

102-4.1 Temporary erosion and pollution control work required will be performed as scheduled or directed by the RPR. Completed and accepted work will be measured ~~as follows:~~ *as one complete item. This work includes obtaining all necessary federal, state, and local permits required to complete this project.*

~~**a.** Temporary seeding and mulching will be measured by the square yard.~~

~~**b.** Temporary slope drains will be measured by the linear foot.~~

~~**c.** Temporary benches, dikes, dams, and sediment basins will be measured by the cubic yard (cubic meter) of excavation performed, including necessary cleaning of sediment basins, and the cubic yard (cubic meter) of embankment placed as directed by the RPR.~~

~~**d.** All fertilizing will be measured by the ton (kg).~~

~~**e.** Installation and removal of silt fence will be measured by the [linear foot] [Lump sum].~~

102-4.2 Control work performed for protection of construction areas outside the construction limits, such as borrow and waste areas, haul roads, equipment and material storage sites, and temporary plant sites, will not be measured and paid for directly but shall be considered as a subsidiary obligation of the Contractor.

BASIS OF PAYMENT

102-5.1 *Temporary erosion control acceptably completed will be paid for at the contract lump sum price bid for "TEMPORARY EROSION CONTROL," which shall be full compensation for furnishing all materials, tools, equipment, labor, and incidentals necessary to complete the work. Periodic payments will be made under this item in proportion to the amount of work accomplished, as determined by the Engineer. Payment for "TEMPORARY EROSION CONTROL" will also include obtaining and compliance with the SWPPP, which shall include compensation for drainage-way inspections, report preparation, housekeeping practices, cleaning and maintenance, and other actions outlined in the SWPPP prepared by the Contractor necessary to execute the Plan. This item consists of all erosion control items not listed as a separate pay item in the Unit Price Schedule. Any fines issued to the Owner as a result of the Contractor's insufficient execution of the SWPPP will be assessed to the Contractor. Such deductions shall not be limited to the lump sum price of this item. Payment will be made under:*

Item C-102-5.1 Temporary Erosion Control—per Lump Sum

~~**102-5.1** Accepted quantities of temporary water pollution, soil erosion, and siltation control work ordered by the RPR and measured as provided in paragraph 102-4.1 will be paid for under:~~

~~Item C-102-5.1a Temporary seeding and mulching - per square yard~~

~~Item C-102-5.1b Temporary slope drains - per linear foot~~

~~Item C-102-5.1c Temporary benches, dikes, dams and sediment basins - per cubic yard~~

~~Item C-102-5.1d Fertilizing - per ton~~

~~Item C-102-5.1e Installation and removal of silt fence [per linear feet (meter)] [lump sum]~~

~~Where other directed work falls within the specifications for a work item that has a contract price, the units of work shall be measured and paid for at the contract unit price bid for the various items.~~

~~Temporary control features not covered by contract items that are ordered by the RPR will be paid for in accordance with Section 90, paragraph 90-05 Payment for Extra Work.~~

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

Advisory Circulars (AC)

AC 150/5200-33 *Hazardous Wildlife Attractants on or Near Airports*

AC 150/5370-2 *Operational Safety on Airports During Construction*

ASTM International (ASTM)

ASTM D6461 *Standard Specification for Silt Fence Materials*

United States Department of Agriculture (USDA)

FAA/USDA Wildlife Hazard Management at Airports, A Manual for Airport Personnel

END OF ITEM C-102

ITEM C-105 MOBILIZATION

DESCRIPTION

105-1 Description. This item of work shall consist of, but is not limited to, work and operations necessary for the movement of personnel, equipment, material and supplies to and from the project site for work on the project except as provided in the contract as separate pay items.

105-2 Mobilization limit. Mobilization shall be limited to 10 percent of the total project cost.

105-3 Posted notices. Prior to commencement of construction activities, the Contractor must post the following documents in a prominent and accessible place where they may be easily viewed by all employees of the prime Contractor and by all employees of subcontractors engaged by the prime Contractor: Equal Employment Opportunity (EEO) Poster "Equal Employment Opportunity is the Law" in accordance with the Office of Federal Contract Compliance Programs Executive Order 11246, as amended; Davis Bacon Wage Poster (WH 1321) - DOL "Notice to All Employees" Poster; and Applicable Davis-Bacon Wage Rate Determination. These notices must remain posted until final acceptance of the work by the Owner.

105-4.1 Engineer/RPR field office. An Engineer/RPR field office is not required.

105-4.2 Contractor's access / haul routes. *The Contractor shall layout, construct, maintain, and repair all access/haul roads needed to construct the work. The existing access roads shown on the plans shall be repaired, as determined necessary by the Engineer, at the close of the project. All such work, including all materials and labor, involved in the layout, construction, maintenance, and repair of the Contractor's access/haul roads will not be measured for separate payment but will be considered subsidiary to the bid item "Mobilization." If necessary, pipe culverts shall be installed and maintained as required and shall be of the size as directed by the Engineer. The type of pipe used shall be approved by the Engineer. Pipe culverts will not be measured for separate payment but will be considered subsidiary to "Haul Road Construction". All pipe culverts shall remain on site at the close of the project, unless otherwise approved by the Engineer.*

105-4.3 Contractor's Staging Area. *The areas designated in the plans or by the Engineer as the Contractor's staging area shall be cleared and graded by the Contractor as needed for use by the Contractor in constructing the work on this project. All areas used or otherwise occupied by the Contractor for his operations shall be cleaned, regraded, and seeded, as directed by the Engineer, prior to the final acceptance of the project by the Airport. All work involved in the preparation and restoration of areas used or occupied by the Contractor, including clearing, grubbing, regrading, seeding, and installing and removing fence, will not be measured for separate payment but will be considered subsidiary to the bid item "Mobilization."*

105-4.4 ***Instrument Control.*** *The Contractor will be furnished survey baselines and benchmarks to control the work as shown on the Plans. The Contractor shall be responsible for the additional instrument control necessary to layout and construct the work. The Contractor shall provide the instrument control as provided for in Section 50 of the General Provisions. The Contractor's instrument control of the work shall not be measured for separate payment, but will be considered subsidiary to the bid item "Mobilization".*

105-4.5 ***Clean-Up.*** *From time to time, the Contractor shall clean up the site in order that the site presents a neat appearance and that the progress of work will not be impeded. One such clean up shall immediately precede final inspection.*

Immediately following acceptance of the work by the Owner, the Contractor shall remove all temporary equipment, surplus materials, and debris resulting from his operations, and leave the site in a condition fully acceptable to the Owner.

METHOD OF MEASUREMENT

105-5 Basis of measurement and payment. Based upon the contract lump sum price for "Mobilization" partial payments will be allowed as follows:

a. With first pay request, 25%.

b. When 25% or more of the original contract is earned, an additional 25%.

c. When 50% or more of the original contract is earned, an additional 40%.

d. After Final Inspection, Staging area clean-up and delivery of all Project Closeout materials as required by Section 90, paragraph 90-11, Contractor Final Project Documentation, the final 10%.

BASIS OF PAYMENT

105-6 Payment will be made under:

Item C-105-6.1 Mobilization (Maximum 10% of Total Bid) – per Lump Sum

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

Office of Federal Contract Compliance Programs (OFCCP)

Executive Order 11246, as amended

EEOC-P/E-1 – Equal Employment Opportunity is the Law Poster

United States Department of Labor, Wage and Hour Division (WHD)

WH 1321 – Employee Rights under the Davis-Bacon Act Poster

END OF ITEM C-105

ITEM D-701 PIPE FOR STORM DRAINS AND CULVERTS

DESCRIPTION

701-1.1 This item shall consist of the construction of pipe culverts and storm drains in accordance with these specifications and in reasonably close conformity with the lines and grades shown on the plans. *All reinforced concrete pipe shall be Class IV pipe unless otherwise denoted on the plans. No pick-eye holes will be allowed.*

MATERIALS

701-2.1 Materials shall meet the requirements shown on the plans and specified below. Underground piping and components used in drainage systems for terminal and aircraft fueling ramp drainage shall be noncombustible and inert to fuel in accordance with National Fire Protection Association (NFPA) 415.

701-2.2 Pipe. The pipe shall be of the type called for on the plans or in the proposal and shall be in accordance with the following appropriate requirements:

ASTM C76 Standard Specification for Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe

701-2.3 Concrete. Not used.

701-2.4 Rubber gaskets. Rubber gaskets for rigid pipe shall conform to the requirements of ASTM C443. Rubber gaskets for PVC pipe, polyethylene, and polypropylene pipe shall conform to the requirements of ASTM F477. Rubber gaskets for zinc-coated steel pipe and precoated galvanized pipe shall conform to the requirements of ASTM D1056, for the "RE" closed cell grades. Rubber gaskets for steel reinforced thermoplastic ribbed pipe shall conform to the requirements of ASTM F477.

701-2.5 Joint mortar. Not used.

701-2.6 Joint fillers. Not used.

701-2.7 Plastic gaskets. Not used.

701-2.8. Controlled low-strength material (CLSM). Not used.

701-2.9 Precast box culverts. Manufactured in accordance with and conforming to ASTM C1433.

701-2.10 Precast concrete pipe. Precast concrete structures shall be furnished by a plant meeting National Precast Concrete Association Plant Certification Program or American Concrete Pipe Association QCast Plant Certification program.

CONSTRUCTION METHODS

701-3.1 Excavation. The width of the pipe trench shall be sufficient to permit satisfactory jointing of the pipe and thorough tamping of the bedding material under and around the pipe, but it shall not be less than the external diameter of the pipe plus 12 inches on each side. The trench walls shall be approximately vertical.

The Contractor shall comply with all current federal, state and local rules and regulations governing the safety of men and materials during the excavation, installation and backfilling operations. Specifically, the Contractor shall observe that all requirements of the Occupational Safety and Health Administration (OSHA) relating to excavations, trenching and shoring are strictly adhered to. The width of the trench shall be sufficient to permit satisfactorily jointing of the pipe and thorough compaction of the bedding material under the pipe and backfill material around the pipe, but it shall not be greater than the widths shown on the plans trench detail.

Where rock, hardpan, or other unyielding material is encountered, the Contractor shall remove it from below the foundation grade for a depth of at least 8 inch or 1/2 inch for each foot of fill over the top of the pipe (whichever is greater) but for no more than three-quarters of the nominal diameter of the pipe. The excavation below grade should be filled with granular material to form a uniform foundation.

Where a firm foundation is not encountered at the grade established, due to soft, spongy, or other unstable soil, the unstable soil shall be removed and replaced with approved granular material for the full trench width. The RPR shall determine the depth of removal necessary. The granular material shall be compacted to provide adequate support for the pipe.

The excavation for pipes placed in embankment fill shall not be made until the embankment has been completed to a height above the top of the pipe as shown on the plans.

701-3.2 Bedding. The bedding surface for the pipe shall provide a foundation of uniform density to support the pipe throughout its entire length.

a. Rigid pipe. The pipe bedding shall be constructed uniformly for the full length of the pipe barrel, as required on the plans. The maximum aggregate size shall be 1 in when the bedding thickness is less than 6 inches, and 1-1/2 in when the bedding thickness is greater than 6 inches. Bedding shall be loosely placed uncompacted material under the middle third of the pipe prior to placement of the pipe.

b. Flexible pipe. For flexible pipe, the bed shall be roughly shaped to fit the pipe, and a bedding blanket of sand or fine granular material shall be provided as follows:

Flexible Pipe Bedding

Pipe Corrugation Depth		Minimum Bedding Depth	
inch	mm	inch	mm
1/2	12	1	25
1	25	2	50
2	50	3	75
2-1/2	60	3-1/2	90

c. Other pipe materials. For PVC, polyethylene, polypropylene, or fiberglass pipe, the bedding material shall consist of coarse sands and gravels with a maximum particle size of 3/4 inches. For pipes installed under paved areas, no more than 12% of the material shall pass the No. 200 (0.075 mm) sieve. For all other areas, no more than 50% of the material shall pass the No. 200 (0.075 mm) sieve. The bedding shall have a thickness of at least 6 inches below the bottom of the pipe and extend up around the pipe for a depth of not less than 50% of the pipe's vertical outside diameter.

701-3.3 Laying pipe. The pipe laying shall begin at the lowest point of the trench and proceed upgrade. The lower segment of the pipe shall be in contact with the bedding throughout its full length. Bell or groove ends of rigid pipes and outside circumferential laps of flexible pipes shall be placed facing upgrade.

Paved or partially lined pipe shall be placed so that the longitudinal center line of the paved segment coincides with the flow line.

Elliptical and elliptically reinforced concrete pipes shall be placed with the manufacturer's reference lines designating the top of the pipe within five degrees of a vertical plane through the longitudinal axis of the pipe.

701-3.4 Joining pipe. Joints shall be made with rubber gaskets

Mortar joints shall be made with an excess of mortar to form a continuous bead around the outside of the pipe and shall be finished smooth on the inside. Molds or runners shall be used for grouted joints to retain the poured grout. Rubber ring gaskets shall be installed to form a flexible watertight seal.

a. Concrete pipe. Concrete pipe may be either bell and spigot or tongue and groove. Pipe sections at joints shall be fully seated and the inner surfaces flush and even. Concrete pipe joints shall be sealed with rubber gaskets meeting ASTM C443 when leak resistant joints are required.

b. Metal pipe. Metal pipe shall be firmly joined by form-fitting bands conforming to the requirements of ASTM A760 for steel pipe and AASHTO M196 for aluminum pipe.

c. PVC, Polyethylene, or Polypropylene pipe. Joints for PVC, Polyethylene, or Polypropylene pipe shall conform to the requirements of ASTM D3212 when leak resistant joints are required. Joints for PVC and Polyethylene pipe shall conform to the requirements of AASHTO M304 when soil tight joints are required. Fittings for polyethylene pipe shall conform to the requirements of AASHTO M252 or ASTM M294. Fittings for polypropylene pipe shall conform to ASTM F2881, ASTM F2736, or ASTM F2764.

d. Fiberglass pipe. Joints and fittings shall be as detailed on the plans and in accordance with the manufacturers recommendations.

701-3.5 Embedment and Overfill. Pipes shall be inspected before any fill material is placed; any pipes found to be out of alignment, unduly settled, or damaged shall be removed and re-laid or replaced at the Contractor's expense.

701-3.5-1 Embedment Material Requirements

a. Concrete Pipe. Embedment material and compaction requirements shall be in accordance with the applicable Type of Standard Installation (Types 1, 2, 3, or 4) per ASTM C1479. If a concrete cradle or CLSM embedment material is used, it shall conform to the plan details.

b. Plastic and fiberglass Pipe. Embedment material shall meet the requirements of ASTM D3282, A-1, A-2-4, A-2-5, or A-3. Embedment material shall be free of organic material, stones larger than 1.5 inches in the greatest dimension, or frozen lumps. Embedment material shall extend to 12 inches above the top of the pipe.

c. Metal Pipe. Embedment material shall be granular as specified in the contract document and specifications, and shall be free of organic material, rock fragments larger than 1.5 inches in the greatest dimension and frozen lumps. As a minimum, backfill materials shall meet the requirements of ASTM D3282, A-1, A-2, or A-3. Embedment material shall extend to 12 inches above the top of the pipe.

701-3.5-2 Placement of Embedment Material. The embedment material shall be compacted in layers not exceeding 6 inches on each side of the pipe and shall be brought up one foot above the top of the pipe or to natural ground level, whichever is greater. Thoroughly compact the embedment material under the haunches of the pipe without displacing the pipe. Material shall be brought up evenly on each side of the pipe for the full length of the pipe.

When the top of the pipe is above the top of the trench, the embedment material shall be compacted in layers not exceeding 6 inches and shall be brought up evenly on each side of the pipe to one foot above the top of the pipe. All embedment material shall be compacted to a density required under Item P-152.

Concrete cradles and flowable fills, such as controlled low strength material (CLSM) or controlled density fill (CDF), may be used for embedment provided adequate flotation resistance can be achieved by restraints, weighing, or placement technique.

It shall be the Contractor's responsibility to protect installed pipes and culverts from damage due to construction equipment operations. The Contractor shall be responsible for installation of any extra strutting or backfill required to protect pipes from the construction equipment.

701-3.6 Overfill. Pipes shall be inspected before any overfill is in place. Any pipes found to be out of alignment, unduly settled, or damaged shall be removed and relaid or replaced at the Contractor's expense. Evaluation of any damage to RCP shall be evaluated based on AASHTO R73.

Overfill material shall be place and compacted in layers as required to achieve compaction to at least 95 percent standard proctor per ASTM D698. The soil shall contain no debris, organic matter, frozen material, or stones with a diameter greater than one half the thickness of the compacted layers being placed.

701-3.7 Inspection Requirements

An initial post installation inspection shall be performed by the RPR no sooner than 30 days after completion of installation and final backfill. Clean or flush all lines prior to inspection.

METHOD OF MEASUREMENT

701-4.1 The length of pipe shall be measured in linear feet of pipe in place, completed, and accepted. It shall be measured along the centerline of the pipe from end or inside face of structure to the end or inside face of structure, whichever is applicable. The size of pipe shall be measured separately. All fittings shall be included in the footage as typical pipe sections in the pipe being measured. *Pipe bedding will not be measured for separate payment but will be considered subsidiary to the pipe installation.*

701-4.2. *The pipe end sections shall be measured for each complete unit installed in place, completed, and accepted. All fittings shall be included as part of the item. Bedding will not be measured for separate payment but will be considered subsidiary to the end section.*

701-4.3 Not used.

701-4.4 Not used.

BASIS OF PAYMENT

701-5.0 These prices shall fully compensate the Contractor for furnishing all materials and for all preparation, excavation, and installation of these materials; and for all labor, equipment, tools, and incidentals necessary to complete the item.

701-5.1 Payment will be made at the contract unit price per linear foot for each size of pipe.

701-5.2 *Payment will be made at the contract unit price per each for each concrete end section.*

701-5.3 Not used.

701-5.4 Not used.

Payment will be made under:

Item D-701-5.1	30" RCP (Class IV) - per linear foot
Item D-701-5.2	MoDOT Precast Concrete Flared End Sections – per each

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

American Association of State Highway and Transportation Officials (AASHTO)

AASHTO M167	Standard Specification for Corrugated Steel Structural Plate, Zinc-Coated, for Field-Bolted Pipe, Pipe-Arches, and Arches
AASHTO M190	Standard Specification for Bituminous-Coated Corrugated Metal Culvert Pipe and Pipe Arches
AASHTO M196	Standard Specification for Corrugated Aluminum Pipe for Sewers and Drains
AASHTO M219	Standard Specification for Corrugated Aluminum Alloy Structural Plate for Field-Bolted Pipe, Pipe-Arches, and Arches
AASHTO M243	Standard Specification for Field Applied Coating of Corrugated Metal Structural Plate for Pipe, Pipe-Arches, and Arches

AASHTO M252	Standard Specification for Corrugated Polyethylene Drainage Pipe
AASHTO M294	Standard Specification for Corrugated Polyethylene Pipe, 300- to 1500-mm (12- to 60-in.) Diameter
AASHTO M304	Standard Specification for Poly (Vinyl Chloride) (PVC) Profile Wall Drain Pipe and Fittings Based on Controlled Inside Diameter
AASHTO MP20	Standard Specification for Steel Reinforced Polyethylene (PE) Ribbed Pipe, 300- to 900-mm (12- to 36-in.) Diameter

ASTM International (ASTM)

ASTM A760	Standard Specification for Corrugated Steel Pipe, Metallic Coated for Sewers and Drains
ASTM A761	Standard Specification for Corrugated Steel Structural Plate, Zinc Coated, for Field-Bolted Pipe, Pipe-Arches, and Arches
ASTM A762	Standard Specification for Corrugated Steel Pipe, Polymer Precoated for Sewers and Drains
ASTM A849	Standard Specification for Post-Applied Coatings, Pavings, and Linings for Corrugated Steel Sewer and Drainage Pipe
ASTM B745	Standard Specification for Corrugated Aluminum Pipe for Sewers and Drains
ASTM C14	Standard Specification for Nonreinforced Concrete Sewer, Storm Drain, and Culvert Pipe
ASTM C76	Standard Specification for Reinforced Concrete Culvert, Storm Drain, and Sewer Pipe
ASTM C94	Standard Specification for Ready Mixed Concrete
ASTM C144	Standard Specification for Aggregate for Masonry Mortar
ASTM C150	Standard Specification for Portland Cement
ASTM C443	Standard Specification for Joints for Concrete Pipe and Manholes, Using Rubber Gaskets
ASTM C506	Standard Specification for Reinforced Concrete Arch Culvert, Storm Drain, and Sewer Pipe
ASTM C507	Standard Specification for Reinforced Concrete Elliptical Culvert, Storm Drain and Sewer Pipe
ASTM C655	Standard Specification for Reinforced Concrete D-Load Culvert, Storm Drain and Sewer Pipe
ASTM C990	Standard Specification for Joints for Concrete Pipe, Manholes, and Precast Box Sections Using Preformed Flexible Joint Sealants
ASTM C1433	Standard Specification for Precast Reinforced Concrete Monolithic Box Sections for Culverts, Storm Drains, and Sewers
ASTM D1056	Standard Specification for Flexible Cellular Materials Sponge or Expanded Rubber
ASTM D3034	Standard Specification for Type PSM Poly (Vinyl Chloride) (PVC) Sewer Pipe and Fittings

ASTM D3212	Standard Specification for Joints for Drain and Sewer Plastic Pipes Using Flexible Elastomeric Seals
ASTM D3262	Standard Specification for "Fiberglass" (Glass-Fiber Reinforced Thermosetting Resin) Sewer Pipe
ASTM D3282	Standard Practice for Classification of Soils and Soil-Aggregate Mixtures for Highway Construction Purposes
ASTM D4161	Standard Specification for "Fiberglass" (Glass-Fiber Reinforced Thermosetting Resin) Pipe Joints Using Flexible Elastomeric Seals
ASTM D6690	Standard Specification for Joint and Crack Sealants, Hot Applied, for Concrete and Asphalt Pavements
ASTM F477	Standard Specification for Elastomeric Seals (Gaskets) for Joining Plastic Pipe
ASTM F667	Standard Specification for 3 through 24 in. Corrugated Polyethylene Pipe and Fittings
ASTM F714	Standard Specification for Polyethylene (PE) Plastic Pipe (DR PR) Based on Outside Diameter
ASTM F794	Standard Specification for Poly (Vinyl Chloride) (PVC) Profile Gravity Sewer Pipe & Fittings Based on Controlled Inside Diameter
ASTM F894	Standard Specification for Polyethylene (PE) Large Diameter Profile Wall Sewer and Drain Pipe
ASTM F949	Standard Specification for Poly (Vinyl Chloride) (PVC) Corrugated Sewer Pipe with a Smooth Interior and Fittings
ASTM F2435	Standard Specification for Steel Reinforced Polyethylene (PE) Corrugated Pipe
ASTM F2562	Specification for Steel Reinforced Thermoplastic Ribbed Pipe and Fittings for Non-Pressure Drainage and Sewerage
ASTM F2736	Standard Specification for 6 to 30 in. (152 to 762 mm) Polypropylene (PP) Corrugated Single Wall Pipe and Double Wall Pipe
ASTM F2764	Standard Specification for 30 to 60 in. (750 to 1500 mm) Polypropylene (PP) Triple Wall Pipe and Fittings for Non-Pressure Sanitary Sewer Applications
ASTM F2881	Standard Specification for 12 to 60 in. (300 to 1500 mm) Polypropylene (PP) Dual Wall Pipe and Fittings for Non-Pressure Storm Sewer Applications

National Fire Protection Association (NFPA)

NFPA 415	Standard on Airport Terminal Buildings, Fueling Ramp Drainage, and Loading Walkways

END ITEM D-701

ITEM L-108 UNDERGROUND POWER CABLE FOR AIRPORTS

DESCRIPTION

108-1.1 This item shall consist of furnishing and installing power cables that are direct buried and furnishing and/or installing power cables within conduit or duct banks per these specifications at the locations shown on the plans. It includes excavation and backfill of trench for direct-buried cables only. Also included are the installation of counterpoise wires, ground wires, ground rods and connections, cable splicing, cable marking, cable testing, and all incidentals necessary to place the cable in operating condition as a completed unit to the satisfaction of the RPR. This item shall not include the installation of duct banks or conduit, trenching and backfilling for duct banks or conduit, or furnishing or installation of cable for FAA owned/operated facilities.

EQUIPMENT AND MATERIALS

108-2.1 General.

a. Airport lighting equipment and materials covered by advisory circulars (AC) shall be approved under the Airport Lighting Equipment Certification Program per AC 150/5345-53, current version.

b. All other equipment and materials covered by other referenced specifications shall be subject to acceptance through manufacturer's certification of compliance with the applicable specification, when requested by the RPR.

c. Manufacturer's certifications shall not relieve the Contractor of the responsibility to provide materials per these specifications. Materials supplied and/or installed that do not comply with these specifications shall be removed (when directed by the RPR) and replaced with materials that comply with these specifications at the Contractor's cost.

d. All materials and equipment used to construct this item shall be submitted to the RPR for approval prior to ordering the equipment. Submittals consisting of marked catalog sheets or shop drawings shall be provided. Submittal data shall be presented in a clear, precise and thorough manner. Original catalog sheets are preferred. Photocopies are acceptable provided they are as good a quality as the original. Clearly and boldly mark each copy to identify products or models applicable to this project. Indicate all optional equipment and delete any non-pertinent data. Submittals for components of electrical equipment and systems shall identify the equipment to which they apply on each submittal sheet. Markings shall be made bold and clear with arrows or circles (highlighting is not acceptable). The Contractor is solely responsible for delays in the project that may accrue directly or indirectly from late submissions or resubmissions of submittals.

e. The data submitted shall be sufficient, in the opinion of the RPR, to determine compliance with the plans and specifications. The Contractor's submittals shall be electronically submitted in pdf format, tabbed by specification section. The RPR reserves the right to reject any and all equipment, materials, or procedures that do not meet the system design and the standards and codes, specified in this document.

f. All equipment and materials furnished and installed under this section shall be guaranteed against defects in materials and workmanship for at least twelve (12) months from the date of final acceptance by the Owner. The defective materials and/or equipment shall be repaired or replaced, at the Owner's discretion, with no additional cost to the Owner. The Contractor shall maintain a minimum insulation resistance in accordance with paragraph 108-3.10e with isolation transformers connected in new circuits and new segments of existing circuits through the end of the contract warranty period when tested in accordance with AC 150/5340-26, *Maintenance Airport Visual Aid Facilities*, paragraph 5.1.3.1, Insulation Resistance Test.

108-2.2 Cable. Underground cable for airfield lighting facilities (runway and taxiway lights and signs) shall conform to the requirements of AC 150/5345-7, Specification for L-824 Underground Electrical Cable for Airport Lighting Circuits latest edition. Conductors for use on 6.6 ampere primary airfield lighting series circuits shall be single conductor, seven strand, #8 American wire gauge (AWG), L-824 Type C, 5,000 volts, non-shielded, with cross-linked polyethylene insulation. ~~Conductors for use on 20 ampere primary airfield~~

~~lighting series circuits shall be single conductor, seven strand, #6 AWG, L-824 [Type B][Type C], 5,000 volts, non-shielded, with [ethylene propylene insulation][cross-linked polyethylene insulation].~~ L-824 conductors for use on the L-830 secondary of airfield lighting series circuits shall be sized in accordance with the manufacturer's recommendations. All other conductors shall comply with FAA and National Electric Code (NEC) requirements. Conductor sizes noted above shall not apply to leads furnished by manufacturers on airfield lighting transformers and fixtures.

Wire for electrical circuits up to 600 volts shall comply with Specification L-824 and/or Commercial Item Description A-A-59544A and shall be type THWN-2, 75°C for installation in conduit and RHW-2, 75°C for direct burial installations. Conductors for parallel (voltage) circuits shall be type and size and installed in accordance with NFPA-70, National Electrical Code.

Unless noted otherwise, all 600-volt and less non-airfield lighting conductor sizes are based on a 75°C, THWN-2, 600-volt insulation, copper conductors, not more than three single insulated conductors, in raceway, in free air. The conduit/duct sizes are based on the use of THWN-2, 600-volt insulated conductors. The Contractor shall make the necessary increase in conduit/duct sizes for other types of wire insulation. In no case shall the conduit/duct size be reduced. The minimum power circuit wire size shall be #12 AWG.

Conductor sizes may have been adjusted due to voltage drop or other engineering considerations. Equipment provided by the Contractor shall be capable of accepting the quantity and sizes of conductors shown in the Contract Documents. All conductors, pigtails, cable step-down adapters, cable step-up adapters, terminal blocks and splicing materials necessary to complete the cable termination/splice shall be considered incidental to the respective pay items provided.

Cable type, size, number of conductors, strand and service voltage shall be as specified in the Contract Document.

108-2.3 Bare copper wire (counterpoise, bare copper wire ground and ground rods). Wire for counterpoise or ground installations for airfield lighting systems shall be No. 6 bare solid copper wire for counterpoise and/or No. 6 AWG insulated stranded for grounding bond wire per ASTM B3 and ASTM B8, and shall be bare copper wire. For voltage powered circuits, the equipment grounding conductor shall comply with NEC Article 250.

Ground rods shall be copper-clad steel. The ground rods shall be of the length and diameter specified on the plans, but in no case be less than 10 feet long and 3/4 inch in diameter.

108-2.4 Cable connections. In-line connections or splices of underground primary cables shall be of the type called for on the plans, and shall be one of the types listed below. No separate payment will be made for cable connections.

a. The cast splice. A cast splice, employing a plastic mold and using epoxy resin equivalent to that manufactured by 3M™ Company, "Scotchcast" Kit No. 82-B, or an approved equivalent, used for potting the splice is acceptable.

b. The field-attached plug-in splice. Field attached plug-in splices shall be installed as shown on the plans. The Contractor shall determine the outside diameter of the cable to be spliced and furnish appropriately sized connector kits and/or adapters. Tape or heat shrink tubing with integral sealant shall be in accordance with the manufacturer's requirements. Primary Connector Kits manufactured by Amerace, "Super Kit", Integro "Complete Kit", or approved equal *are* acceptable.

c. The factory-molded plug-in splice. Specification for L-823 Connectors, Factory-Molded to Individual Conductors, is acceptable.

d. The taped or heat-shrink splice. Taped splices employing field-applied rubber, or synthetic rubber tape covered with plastic tape is acceptable. The rubber tape should meet the requirements of ASTM D4388 and the plastic tape should comply with Military Specification MIL-I-24391 or Commercial Item Description A-A-55809. Heat shrinkable tubing shall be heavy-wall, self-sealing tubing rated for the voltage of the wire being spliced and suitable for direct-buried installations. The tubing shall be factory coated with a thermoplastic adhesive-sealant that will adhere to the insulation of the wire being spliced forming a

moisture- and dirt-proof seal. Additionally, heat shrinkable tubing for multi-conductor cables, shielded cables, and armored cables shall be factory kits that are designed for the application. Heat shrinkable tubing and tubing kits shall be manufactured by Tyco Electronics/ Raychem Corporation, Energy Division, or approved equivalent.

In all the above cases, connections of cable conductors shall be made using crimp connectors using a crimping tool designed to make a complete crimp before the tool can be removed. All L-823/L-824 splices and terminations shall be made per the manufacturer's recommendations and listings.

All connections of counterpoise, grounding conductors and ground rods shall be made by the exothermic process or approved equivalent, except that a light base ground clamp connector shall be used for attachment to the light base. All exothermic connections shall be made per the manufacturer's recommendations and listings.

108-2.5 Splicer qualifications. Every airfield lighting cable splicer shall be qualified in making airport cable splices and terminations on cables rated at or above 5,000 volts AC. The Contractor shall submit to the RPR proof of the qualifications of each proposed cable splicer for the airport cable type and voltage level to be worked on. Cable splicing/terminating personnel shall have a minimum of three (3) years continuous experience in terminating/splicing medium voltage cable.

108-2.6 Concrete. *Concrete shall be proportioned, placed, and cured per Item SS-300 Basic Electrical Requirements.*

108-2.7 Flowable backfill. ~~Flowable material used to backfill trenches for power cable trenches shall conform to the requirements of Item P-153, Controlled Low Strength Material.~~

108-2.8 Cable identification tags. Cable identification tags shall be made from a non-corrosive material with the circuit identification stamped or etched onto the tag. The tags shall be of the type as detailed on the plans.

108-2.9 Tape. Electrical tapes shall be Scotch™ Electrical Tapes –Scotch™ 88 (1-1/2 inch wide) and Scotch™ 130C® linerless rubber splicing tape (2-inch (50 mm) wide), as manufactured by the Minnesota Mining and Manufacturing Company (3M™), or an approved equivalent.

108-2.10 Electrical coating. Electrical coating shall be Scotchkote™ as manufactured by 3M™, or an approved equivalent.

108-2.11 Existing circuits. Whenever the scope of work requires connection to an existing circuit, the existing circuit's insulation resistance shall be tested, in the presence of the RPR. The test shall be performed per this item and prior to any activity that will affect the respective circuit. The Contractor shall record the results on forms acceptable to the RPR. When the work affecting the circuit is complete, the circuit's insulation resistance shall be checked again, in the presence of the RPR. The Contractor shall record the results on forms acceptable to the RPR. The second reading shall be equal to or greater than the first reading or the Contractor shall make the necessary repairs to the existing circuit to bring the second reading above the first reading. All repair costs including a complete replacement of the L-823 connectors, L-830 transformers and L-824 cable, if necessary, shall be borne by the Contractor. All test results shall be submitted in the Operation and Maintenance (O&M) Manual.

108-2.12 Detectable warning tape. Plastic, detectable, American Public Works Association (APWA) Red (electrical power lines, cables, conduit and lighting cable) with continuous legend tape shall be polyethylene film with a metalized foil core and shall be 3-6 inches wide. Detectable tape is incidental to the respective bid item. Detectable warning tape for communication cables shall be orange. Detectable warning tape color code shall comply with the APWA Uniform Color Code.

CONSTRUCTION METHODS

108-3.1 General. The Contractor shall install the specified cable at the approximate locations indicated on the plans. Unless otherwise shown on the plans, all cable required to cross under pavements expected to carry aircraft loads shall be installed in concrete encased duct banks. Cable shall be run without splices, from fixture to fixture.

Cable connections between lights will be permitted only at the light locations for connecting the underground cable to the primary leads of the individual isolation transformers. The Contractor shall be responsible for providing cable in continuous lengths for home runs or other long cable runs without connections unless otherwise authorized in writing by the RPR or shown on the plans.

In addition to connectors being installed at individual isolation transformers, L-823 cable connectors for maintenance and test points shall be installed at locations shown on the plans. Cable circuit identification markers shall be installed on both sides of the L-823 connectors installed and on both sides of slack loops where a future connector would be installed.

Provide not less than 3 feet of cable slack on each side of all connections, isolation transformers, light units, and at points where cable is connected to field equipment. Where provisions must be made for testing or for future above grade connections, provide enough slack to allow the cable to be extended at least one foot vertically above the top of the access structure. This requirement also applies where primary cable passes through empty light bases, junction boxes, and access structures to allow for future connections, or as designated by the RPR.

Primary airfield lighting cables installed shall have cable circuit identification markers attached on both sides of each L-823 connector and on each airport lighting cable entering or leaving cable access points, such as manholes, hand holes, pull boxes, junction boxes, etc. Markers shall be of sufficient length for imprinting the cable circuit identification legend on one line, using letters not less than 1/4 inch in size. The cable circuit identification shall match the circuits noted on the construction plans.

108-3.2 Installation in duct banks or conduits. This item includes the installation of the cable in duct banks or conduit per the following paragraphs. The maximum number and voltage ratings of cables installed in each single duct or conduit, and the current-carrying capacity of each cable shall be per the latest version of the National Electric Code, or the code of the local agency or authority having jurisdiction.

The Contractor shall make no connections or splices of any kind in cables installed in conduits or duct banks.

Unless otherwise designated in the plans, where ducts are in tiers, use the lowest ducts to receive the cable first, with spare ducts left in the upper levels. Check duct routes prior to construction to obtain assurance that the shortest routes are selected and that any potential interference is avoided.

Duct banks or conduits shall be installed as a separate item per Item L-110, Airport Underground Electrical Duct Banks and Conduit. The Contractor shall run a mandrel through duct banks or conduit prior to installation of cable to ensure that the duct bank or conduit is open, continuous and clear of debris. The mandrel size shall be compatible with the conduit size. The Contractor shall swab out all conduits/ducts and clean light bases, manholes, etc., interiors immediately prior to pulling cable. Once cleaned and swabbed, the light bases and all accessible points of entry to the duct/conduit system shall be kept closed except when installing cables. Cleaning of ducts, light bases, manholes, etc., is incidental to the pay item of the item being cleaned. All raceway systems left open, after initial cleaning, for any reason shall be re-cleaned at the Contractor's expense. The Contractor shall verify existing ducts proposed for use in this project as clear and open. The Contractor shall notify the RPR of any blockage in the existing ducts.

The cable shall be installed in a manner that prevents harmful stretching of the conductor, damage to the insulation, or damage to the outer protective covering. The ends of all cables shall be sealed with moisture-seal tape providing moisture-tight mechanical protection with minimum bulk, or alternately, heat shrinkable tubing before pulling into the conduit and it shall be left sealed until connections are made. Where more than one cable is to be installed in a conduit, all cable shall be pulled in the conduit at the same time. The pulling of a cable through duct banks or conduits may be accomplished by hand winch or power winch with the use of cable grips or pulling eyes. Maximum pulling tensions shall not exceed the cable manufacturer's recommendations. A non-hardening cable-pulling lubricant recommended for the type of cable being installed shall be used where required.

The Contractor shall submit the recommended pulling tension values to the RPR prior to any cable installation. If required by the RPR, pulling tension values for cable pulls shall be monitored by a dynamometer in the presence of the RPR. Cable pull tensions shall be recorded by the Contractor and

reviewed by the RPR. Cables exceeding the maximum allowable pulling tension values shall be removed and replaced by the Contractor at the Contractor's expense.

The manufacturer's minimum bend radius or NEC requirements (whichever is more restrictive) shall apply. Cable installation, handling and storage shall be per manufacturer's recommendations. During cold weather, particular attention shall be paid to the manufacturer's minimum installation temperature. Cable shall not be installed when the temperature is at or below the manufacturer's minimum installation temperature. At the Contractor's option, the Contractor may submit a plan, for review by the RPR, for heated storage of the cable and maintenance of an acceptable cable temperature during installation when temperatures are below the manufacturer's minimum cable installation temperature.

Cable shall not be dragged across base can or manhole edges, pavement or earth. When cable must be coiled, lay cable out on a canvas tarp or use other appropriate means to prevent abrasion to the cable jacket.

108-3.3 Installation of direct-buried cable in trenches. Unless otherwise specified, the Contractor shall not use a cable plow for installing the cable. Cable shall be unreeled uniformly in place alongside or in the trench and shall be carefully placed along the bottom of the trench. The cable shall not be unreeled and pulled into the trench from one end. Slack cable sufficient to provide strain relief shall be placed in the trench in a series of S curves. Sharp bends or kinks in the cable shall not be permitted.

Where cables must cross over each other, a minimum of 3 inches vertical displacement shall be provided with the topmost cable depth at or below the minimum required depth below finished grade.

a. Trenching. Where turf is well established and the sod can be removed, it shall be carefully stripped and properly stored. Trenches for cables may be excavated manually or with mechanical trenching equipment. Walls of trenches shall be essentially vertical so that a minimum of surface is disturbed. Graders shall not be used to excavate the trench with their blades. The bottom surface of trenches shall be essentially smooth and free from coarse aggregate. Unless otherwise specified, cable trenches shall be excavated to a minimum depth of 18 inches below finished grade per NEC Table 300.5, except as follows:

- When off the airport or crossing under a roadway or driveway, the minimum depth shall be 36 inches unless otherwise specified.
- Minimum cable depth when crossing under a railroad track, shall be 42 inches unless otherwise specified.

The Contractor shall excavate all cable trenches to a width not less than 6 inches. Unless otherwise specified on the plans, all cables in the same location and running in the same general direction shall be installed in the same trench.

When rock is encountered, the rock shall be removed to a depth of at least 3 below the required cable depth and it shall be replaced with bedding material of earth or sand containing no mineral aggregate particles that would be retained on a 1/4-inch sieve. Flowable backfill material may alternatively be used. *The Contractor shall ascertain the type of soil or rock to be excavated before bidding. All such rock removal shall be performed and paid subsidiary to the respective trenching or conduit or duct bank pay item.*

Duct bank or conduit markers temporarily removed for trench excavations shall be replaced as required.

It is the Contractor's responsibility to locate existing utilities within the work area prior to excavation. Where existing active cables cross proposed installations, the Contractor shall ensure that these cables are adequately protected. Where crossings are unavoidable, no splices will be allowed in the existing cables, except as specified on the plans. Installation of new cable where such crossings must occur shall proceed as follows:

(1) Existing cables shall be located manually. Unearthed cables shall be inspected to assure absolutely no damage has occurred.

(2) Trenching, etc., in cable areas shall then proceed, with approval of the RPR, with care taken to minimize possible damage or disruption of existing cable, including careful backfilling in area of cable.

In the event that any previously identified cable is damaged during the course of construction, the Contractor shall be responsible for the complete repair or replacement.

b. Backfilling. After the cable has been installed, the trench shall be backfilled. The first layer of backfill in the trench shall encompass all cables; be 3 deep, loose measurement; and shall be either earth or sand containing no mineral aggregate particles that would be retained on a 1/4-inch sieve. This layer shall not be compacted. The second layer shall be 5 inches deep, loose measurement, and shall contain no particles that would be retained on a one inch (25.0 mm) sieve. The remaining third and subsequent layers of backfill shall not exceed 8 inches of loose measurement and be excavated or imported material and shall not contain stone or aggregate larger than 4 inches maximum diameter.

The second and subsequent layers shall be thoroughly tamped and compacted to at least the density of the adjacent material. If the cable is to be installed in locations or areas where other compaction requirements are specified (under pavements, embankments, etc.) the backfill compaction shall be to a minimum of 100 percent of ASTM D1557.

Trenches shall not contain pools of water during backfilling operations. The trench shall be completely backfilled and tamped level with the adjacent surface, except that when turf is to be established over the trench, the backfilling shall be stopped at an appropriate depth consistent with the type of turfing operation to be accommodated. A proper allowance for settlement shall also be provided. Any excess excavated material shall be removed and disposed of per the plans and specifications.

Underground electrical warning (caution) tape shall be installed in the trench above all direct-buried cable. Contractor shall submit a sample of the proposed warning tape for acceptance by the RPR. If not shown on the plans, the warning tape shall be located 6 inches) above the direct-buried cable or the counterpoise wire if present. A 3-6 inch wide polyethylene film detectable tape, with a metalized foil core, shall be installed above all direct buried cable or counterpoise. The tape shall be of the color and have a continuous legend as indicated on the plans. The tape shall be installed 8 inches minimum below finished grade.

c. Restoration. Following restoration of all trenching near airport movement surfaces, the Contractor shall visually inspect the area for foreign object debris (FOD) and remove any that is found. Where soil and sod has been removed, it shall be replaced as soon as possible after the backfilling is completed. All areas disturbed by work shall be restored to its original condition. The restoration shall include the topsoiling, seeding, and mulching as shown on the plans. The Contractor shall be held responsible for maintaining all disturbed surfaces and replacements until final acceptance. When trenching is through paved areas, restoration shall be equal to existing conditions. If the cable is to be installed in locations or areas where other compaction requirements are specified (under pavements, embankments, etc.) the backfill compaction shall be to a minimum of 100 percent of ASTM D1557. Restoration shall be considered incidental to the pay item of which it is a component part.

108-3.4 Cable markers for direct-buried cable. The location of direct buried circuits shall be marked by a concrete slab marker, 2 feet square and 4-6 inch thick, extending approximately one inch above the surface. Each cable run from a line of lights and signs to the equipment vault shall be marked at approximately every 200 feet along the cable run, with an additional marker at each change of direction of cable run. All other direct-buried cable shall be marked in the same manner. Cable markers shall be installed directly above the cable. The Contractor shall impress the word "CABLE" and directional arrows on each cable marking slab. The letters shall be approximately 4 inches high and 3 inches wide, with width of stroke 1/2 inch and 1/4 inch deep. Stencils shall be used for cable marker lettering; no hand lettering shall be permitted.

At the location of each underground cable connection/splice, except at lighting units, or isolation transformers, a concrete marker slab shall be installed to mark the location of the connection/splice. The Contractor shall impress the word "SPLICE" on each slab. The Contractor also shall impress additional circuit identification symbols on each slab as directed by the RPR. All cable markers and splice markers shall be painted international orange. Paint shall be specifically manufactured for uncured exterior concrete. After placement, all cable or splice markers shall be given one coat of high-visibility aviation orange paint

as approved by the RPR. Furnishing and installation of cable markers is incidental to the respective cable pay item.

108-3.5 Splicing. Connections of the type shown on the plans shall be made by experienced personnel regularly engaged in this type of work and shall be made as follows:

a. Cast splices. These shall be made by using crimp connectors for jointing conductors. Molds shall be assembled, and the compound shall be mixed and poured per the manufacturer's instructions and to the satisfaction of the RPR.

b. Field-attached plug-in splices. These shall be assembled per the manufacturer's instructions. These splices shall be made by plugging directly into mating connectors. The joint where the connectors come together shall be finished by one of the following methods: (1) wrapped with at least one layer of rubber or synthetic rubber tape and one layer of plastic tape, one-half lapped, extending at least 1-1/2 inches on each side of the joint (2) Covered with heat shrinkable tubing with integral sealant extending at least 1-1/2 inches on each side of the joint or (3) On connector kits equipped with water seal flap; roll-over water seal flap to sealing position on mating connector.

c. Factory-molded plug-in splices. These shall be made by plugging directly into mating connectors. The joint where the connectors come together shall be finished by one of the following methods: (1) Wrapped with at least one layer of rubber or synthetic rubber tape and one layer of plastic tape, one-half lapped, extending at least 1-1/2 inches on each side of the joint. (2) Covered with heat shrinkable tubing with integral sealant extending at least 1-1/2 inches on each side of the joint. or (3) On connector kits so equipped with water seal flap; roll-over water seal flap to sealing position on mating connector.

d. Taped or heat-shrink splices. A taped splice shall be made in the following manner:

Bring the cables to their final position and cut so that the conductors will butt. Remove insulation and jacket allowing for bare conductor of proper length to fit compression sleeve connector with 1/4 inch of bare conductor on each side of the connector. Prior to splicing, the two ends of the cable insulation shall be penciled using a tool designed specifically for this purpose and for cable size and type. Do not use emery paper on splicing operation since it contains metallic particles. The copper conductors shall be thoroughly cleaned. Join the conductors by inserting them equidistant into the compression connection sleeve. Crimp conductors firmly in place with crimping tool that requires a complete crimp before tool can be removed. Test the crimped connection by pulling on the cable. Scrape the insulation to assure that the entire surface over which the tape will be applied (plus 3 inches on each end) is clean. After scraping, wipe the entire area with a clean lint-free cloth. Do not use solvents.

Apply high-voltage rubber tape one-half lapped over bare conductor. This tape should be tensioned as recommended by the manufacturer. Voids in the connector area may be eliminated by highly elongating the tape, stretching it just short of its breaking point. The manufacturer's recommendation for stretching tape during splicing shall be followed. Always attempt to exactly half-lap to produce a uniform buildup. Continue buildup to 1-1/2 times cable diameter over the body of the splice with ends tapered a distance of approximately one inch over the original jacket. Cover rubber tape with two layers of vinyl pressure-sensitive tape one-half lapped. Do not use glyptol or lacquer over vinyl tape as they react as solvents to the tape. No further cable covering or splice boxes are required.

Heat shrinkable tubing shall be installed following manufacturer's instructions. Direct flame heating shall not be permitted unless recommended by the manufacturer. Cable surfaces within the limits of the heat-shrink application shall be clean and free of contaminates prior to application.

e. Assembly. Surfaces of equipment or conductors being terminated or connected shall be prepared in accordance with industry standard practice and manufacturer's recommendations. All surfaces to be connected shall be thoroughly cleaned to remove all dirt, grease, oxides, nonconductive films, or other foreign material. Paints and other nonconductive coatings shall be removed to expose base metal. Clean all surfaces at least 1/4 inch beyond all sides of the larger bonded area on all mating surfaces. Use a joint compound suitable for the materials used in the connection. Repair painted/coated surface to original condition after completing the connection.

108-3.6 Bare counterpoise wire installation for lightning protection and grounding. If shown on the plans or included in the job specifications, bare solid No. 6 AWG copper counterpoise wire shall be installed for lightning protection of the underground cables. The RPR shall select one of two methods of lightning protection for the airfield lighting circuit based upon sound engineering practice and lightning strike density.

a. Equipotential. – The counterpoise size is shown on the plans. The equipotential method is applicable to all airfield lighting systems; i.e. runway, taxiway, apron – touchdown zone, centerline, edge, threshold and approach lighting systems. The equipotential method is also successfully applied to provide lightning protection for power, signal and communication systems. The light bases, counterpoise, etc – all components - are bonded together and bonded to the vault power system ground loop/electrode.

Counterpoise wire shall be installed in the same trench for the entire length of buried cable, conduits and duct banks that are installed to contain airfield cables. The counterpoise is centered over the cable/conduit/duct to be protected.

The counterpoise conductor shall be installed no less than 8 inches minimum or 12 inches maximum above the raceway or cable to be protected, except as permitted below:

(1) The minimum counterpoise conductor height above the raceway or cable to be protected shall be permitted to be adjusted subject to coordination with the airfield lighting and pavement designs.

(2) The counterpoise conductor height above the protected raceway(s) or cable(s) shall be calculated to ensure that the raceway or cable is within a 45-degree area of protection, (45 degrees on each side of vertical creating a 90 degree angle).

The counterpoise conductor shall be bonded to each metallic light base, mounting stake, and metallic airfield lighting component.

All metallic airfield lighting components in the field circuit on the output side of the constant current regulator (CCR) or other power source shall be bonded to the airfield lighting counterpoise system.

All components rise and fall at the same potential; with no potential difference, no damaging arcing and no damaging current flow.

See AC 150/5340-30, Design and Installation Details for Airport Visual Aids and NFPA 780, Standard for the Installation of Lightning Protection Systems, Chapter 11, for a detailed description of the Equipotential Method of lightning protection.

Reference FAA STD-019E, Lightning and Surge Protection, Grounding Bonding and Shielding Requirements for Facilities and Electronic Equipment, Part 4.1.1.7.

b. Isolation – Not used.

c. Common Installation requirements. When a metallic light base is used, the grounding electrode shall be bonded to the metallic light base or mounting stake with a No. 6 AWG bare, annealed or soft drawn, solid copper conductor.

Grounding electrodes may be rods, ground dissipation plates, radials, or other electrodes listed in the NFPA 70 (NEC) or NFPA 780.

Where raceway is installed by the directional bore, jack and bore, or other drilling method, the counterpoise conductor shall be permitted to be installed concurrently with the directional bore, jack and bore, or other drilling method raceway, external to the raceway or sleeve.

The counterpoise wire shall also be exothermically welded to ground rods installed as shown on the plans but not more than 500 apart around the entire circuit. The counterpoise system shall be continuous and terminate at the transformer vault or at the power source. It shall be securely attached to the vault or equipment external ground ring or other made electrode-grounding system. The connections shall be made as shown on the plans and in the specifications.

Where an existing airfield lighting system is being extended or modified, the new counterpoise conductors shall be interconnected to existing counterpoise conductors at each intersection of the new and existing airfield lighting counterpoise systems.

d. Parallel Voltage Systems. Provide grounding and bonding in accordance with NFPA 70, National Electrical Code.

108-3.7 Counterpoise installation above multiple conduits and duct banks. Counterpoise wires shall be installed above multiple conduits/duct banks for airfield lighting cables, with the intent being to provide a complete area of protection over the airfield lighting cables. When multiple conduits and/or duct banks for airfield cable are installed in the same trench, the number and location of counterpoise wires above the conduits shall be adequate to provide a complete area of protection measured 45 degrees each side of vertical.

Where duct banks pass under pavement to be constructed in the project, the counterpoise shall be placed above the duct bank. Reference details on the construction plans.

108-3.8 Counterpoise installation at existing duct banks. When airfield lighting cables are indicated on the plans to be routed through existing duct banks, the new counterpoise wiring shall be terminated at ground rods at each end of the existing duct bank where the cables being protected enter and exit the duct bank. The new counterpoise conductor shall be bonded to the existing counterpoise system.

108-3.9 Exothermic bonding. Bonding of counterpoise wire shall be by the exothermic welding process or equivalent method accepted by the RPR. Only personnel experienced in and regularly engaged in this type of work shall make these connections.

Contractor shall demonstrate to the satisfaction of the RPR, the welding kits, materials and procedures to be used for welded connections prior to any installations in the field. The installations shall comply with the manufacturer's recommendations and the following:

a. All slag shall be removed from welds.

b. Using an exothermic weld to bond the counterpoise to a lug on a galvanized light base is not recommended unless the base has been specially modified. Consult the manufacturer's installation directions for proper methods of bonding copper wire to the light base. See AC 150/5340-30 for galvanized light base exception.

c. If called for in the plans, all buried copper and weld material at weld connections shall be thoroughly coated with 6 mm of 3M™ Scotchkote™, or approved equivalent, or coated with coal tar Bitumastic® material to prevent surface exposure to corrosive soil or moisture.

108-3.10 Testing. The Contractor shall furnish all necessary equipment and appliances for testing the airport electrical systems and underground cable circuits before and after installation. The Contractor shall perform all tests in the presence of the RPR. The Contractor shall demonstrate the electrical characteristics to the satisfaction of the RPR. All costs for testing are incidental to the respective item being tested. For phased projects, the tests must be completed by phase. The Contractor must maintain the test results throughout the entire project as well as during the warranty period that meet the following:

a. Earth resistance testing methods shall be submitted to the RPR for approval. Earth resistance testing results shall be recorded on an approved form and testing shall be performed in the presence of the RPR. All such testing shall be at the sole expense of the Contractor.

b. Should the counterpoise or ground grid conductors be damaged or suspected of being damaged by construction activities the Contractor shall test the conductors for continuity with a low resistance ohmmeter. The conductors shall be isolated such that no parallel path exists and tested for continuity. The RPR shall approve of the test method selected. All such testing shall be at the sole expense of the Contractor.

After installation, the Contractor shall test and demonstrate to the satisfaction of the RPR the following:

c. That all affected lighting power and control circuits (existing and new) are continuous and free from short circuits.

d. That all affected circuits (existing and new) are free from unspecified grounds.

e. That the insulation resistance to ground of all new non-grounded high voltage series circuits or cable segments is not less than 500 megohms. Verify continuity of all series airfield lighting circuits prior to energization.

f. That the insulation resistance to ground of all new non-grounded conductors of new multiple circuits or circuit segments is not less than 100 megohms.

g. That all affected circuits (existing and new) are properly connected per applicable wiring diagrams.

h. That all affected circuits (existing and new) are operable. Tests shall be conducted that include operating each control not less than 10 times and the continuous operation of each lighting and power circuit for not less than 1/2 hour.

i. That the impedance to ground of each ground rod does not exceed 25 ohms prior to establishing connections to other ground electrodes. The fall-of-potential ground impedance test shall be used, as described by American National Standards Institute/Institute of Electrical and Electronic Engineers (ANSI/IEEE) Standard 81, to verify this requirement. As an alternate, clamp-on style ground impedance test meters may be used to satisfy the impedance testing requirement. Test equipment and its calibration sheets shall be submitted for review and approval by the RPR prior to performing the testing.

Two copies of tabulated results of all cable tests performed shall be supplied by the Contractor to the RPR. Where connecting new cable to existing cable, insulation resistance tests shall be performed on the new cable prior to connection to the existing circuit.

There are no approved "repair" procedures for items that have failed testing other than complete replacement.

METHOD OF MEASUREMENT

108-4.1 Cable or counterpoise wire installed in trench, duct bank or conduit shall be measured by the number of linear feet installed and grounding connectors, and trench marking tape ready for operation, and accepted as satisfactory. *This includes splicing new cable to existing and bonding new counterpoise to existing in the areas shown on the plans.* Separate measurement shall be made for each cable or counterpoise wire installed in trench, duct bank or conduit. The measurement for this item shall include additional quantities required for slack.

108-4.2 No separate payment will be made for ground rods.

BASIS OF PAYMENT

108-5.1 Payment will be made at the contract unit price for trenching, cable and bare counterpoise wire installed in trench (direct-buried), or cable and equipment ground installed in duct bank or conduit, in place by the Contractor and accepted by the RPR. This price shall be full compensation for furnishing all materials and for all preparation and installation of these materials, and for all labor, equipment, tools, and incidentals, including ground rods and ground connectors and trench marking tape, necessary to complete this item.

Payment will be made under:

Item L-108-5.1	No. 8 AWG, 5 kV, L-824, Type C Cable, Installed in Trench, Duct Bank or Conduit - per Linear Foot
Item L-108-5.2	No. 6 AWG, Solid, Bare Copper Counterpoise Wire, Installed in Trench, Duct Bank, or Conduit, Including Connections/Terminations - per Linear Foot

Item L-108-5.3	No. 6 AWG, 600V Rated, Type XPLE/USE Cable, Installed in Trench, Duct Bank, or Conduit -- per Linear Foot
Item L-108-5.4	No. 6 AWG, 600V Rated, Type XPLE/USE, Green Insulated Equipment Ground, Installed in Trench, Duct Bank, or Conduit -- per Linear Foot

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

Advisory Circulars (AC)

AC 150/5340-26	Maintenance of Airport Visual Aid Facilities
AC 150/5340-30	Design and Installation Details for Airport Visual Aids
AC 150/5345-7	Specification for L-824 Underground Electrical Cable for Airport Lighting Circuits
AC 150/5345-26	Specification for L-823 Plug and Receptacle, Cable Connectors
AC 150/5345-53	Airport Lighting Equipment Certification Program

Commercial Item Description

A-A-59544A	Cable and Wire, Electrical (Power, Fixed Installation)
A-A-55809	Insulation Tape, Electrical, Pressure-Sensitive Adhesive, Plastic

ASTM International (ASTM)

ASTM B3	Standard Specification for Soft or Annealed Copper Wire
ASTM B8	Standard Specification for Concentric-Lay-Stranded Copper Conductors, Hard, Medium-Hard, or Soft
ASTM B33	Standard Specification for Tin-Coated Soft or Annealed Copper Wire for Electrical Purposes
ASTM D33	*Tinned Soft of Annealed Copper Wire for Electrical Purposes*
ASTM D4388	Standard Specification for Nonmetallic Semi-Conducting and Electrically Insulating Rubber Tapes

Mil Spec

MIL-PRF-23586F	Performance Specification: Sealing Compound (with Accelerator), Silicone Rubber, Electrical
MIL-I-24391	Insulation Tape, Electrical, Plastic, Pressure Sensitive

National Fire Protection Association (NFPA)

NFPA-70	National Electrical Code (NEC)
NFPA-780	Standard for the Installation of Lightning Protection Systems

American National Standards Institute (ANSI)/Institute of Electrical and Electronics Engineers (IEEE)

ANSI/IEEE STD 81	IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System

Federal Aviation Administration Standard

FAA STD-019E	Lightning and Surge Protection, Grounding Bonding and Shielding Requirements for Facilities and Electronic Equipment

END OF ITEM L-108

ITEM L-110 AIRPORT UNDERGROUND ELECTRICAL DUCT BANKS AND CONDUITS

DESCRIPTION

110-1.1 This item shall consist of underground electrical conduits and duct banks (single or multiple conduits encased in concrete or buried in sand) installed per this specification at the locations and per the dimensions, designs, and details shown on the plans. This item shall include furnishing and installing of all underground electrical duct banks and individual and multiple underground conduits. It shall also include all turfing trenching, backfilling, removal, and restoration of any paved or turfed areas; concrete encasement, mandrelling, pulling lines, duct markers, plugging of conduits, and the testing of the installation as a completed system ready for installation of cables per the plans and specifications. This item shall also include furnishing and installing conduits and all incidentals for providing positive drainage of the system. Verification of existing ducts is incidental to the pay items provided in this specification.

EQUIPMENT AND MATERIALS

110-2.1 General.

a. All equipment and materials covered by referenced specifications shall be subject to acceptance through manufacturer's certification of compliance with the applicable specification when requested by the RPR.

b. Manufacturer's certifications shall not relieve the Contractor of the responsibility to provide materials per these specifications and acceptable to the RPR. Materials supplied and/or installed that do not comply with these specifications shall be removed, when directed by the RPR and replaced with materials, that comply with these specifications, at the Contractor's cost.

c. All materials and equipment used to construct this item shall be submitted to the RPR for approval prior to ordering the equipment. Submittals consisting of marked catalog sheets or shop drawings shall be provided. Submittal data shall be presented in a clear, precise and thorough manner. Original catalog sheets are preferred. Photocopies are acceptable provided they are as good a quality as the original. Clearly and boldly mark each copy to identify products or models applicable to this project. Indicate all optional equipment and delete non-pertinent data. Submittals for components of electrical equipment and systems shall identify the equipment for which they apply on each submittal sheet. Markings shall be made bold and clear with arrows or circles (highlighting is not acceptable). The Contractor is solely responsible for delays in project that accrue directly or indirectly from late submissions or resubmissions of submittals.

d. The data submitted shall be sufficient, in the opinion of the RPR, to determine compliance with the plans and specifications. The Contractor's submittals shall be electronically submitted in pdf format, tabbed by specification section. The RPR reserves the right to reject any and all equipment, materials or procedures that do not meet the system design and the standards and codes specified in this document.

e. All equipment and materials furnished and installed under this section shall be guaranteed against defects in materials and workmanship for a period of at least twelve (12) months from final acceptance by the Owner. The defective materials and/or equipment shall be repaired or replaced, at the Owner's discretion, with no additional cost to the Owner.

110-2.2 Steel conduit. Rigid galvanized steel (RGS) conduit and fittings shall be hot dipped galvanized inside and out and conform to the requirements of Underwriters Laboratories Standards 6, 514B, and 1242. All RGS conduits or RGS elbows installed below grade, in concrete, permanently wet locations or other similar environments shall be painted with a 10-mil thick coat of asphaltum sealer or shall have a factory-bonded polyvinyl chloride (PVC) cover. Any exposed galvanizing or steel shall be coated with 10 mils of asphaltum sealer. When using PVC coated RGS conduit, care shall be exercised not to damage the factory PVC coating. Damaged PVC coating shall be repaired per the manufacturer's written instructions. In lieu of PVC coated RGS, corrosion wrap tape shall be permitted to be used where RGS is in contact with direct earth."

110-2.3 Plastic conduit. Plastic conduit and fittings-shall conform to the following requirements:

- UL 514B covers W-C-1094-Conduit fittings all types, classes 1 thru 3 and 6 thru 10.
- UL 514C covers W-C-1094- all types, Class 5 junction box and cover in plastic (PVC).
- UL 651 covers W-C-1094-Rigid PVC Conduit, types I and II, Class 4.
- UL 651A covers W-C-1094-Rigid PVC Conduit and high-density polyethylene (HDPE) Conduit type III and Class 4.

Underwriters Laboratories Standards UL-651 and Article 352 of the current National Electrical Code shall be one of the following, as shown on the plans:

a. Type I–Schedule 40 and Schedule 80 PVC suitable for underground use either direct-buried or encased in concrete.

b. Type II–Schedule 40 PVC suitable for either above ground or underground use.

c. Type III – Schedule 80 PVC suitable for either above ground or underground use either direct-buried or encased in concrete.

d. Type III –HDPE pipe, minimum standard dimensional ratio (SDR) 11, suitable for placement with directional boring under pavement.

The type of solvent cement shall be as recommended by the conduit/fitting manufacturer.

110-2.4 Split conduit. Split conduit shall be pre-manufactured for the intended purpose and shall be made of steel or plastic.

110-2.5 Conduit spacers. Conduit spacers shall be prefabricated interlocking units manufactured for the intended purpose. They shall be of double wall construction made of high grade, high density polyethylene complete with interlocking cap and base pads. They shall be designed to accept No. 4 reinforcing bars installed vertically.

110-2.6 Concrete. *Concrete shall be proportioned, placed, and cured per Item SS-300 Basic Electrical Requirements.*

110-2.7 Precast concrete structures. Precast concrete structures shall be furnished by a plant meeting National Precast Concrete Association Plant Certification Program or another RPR approved third party certification program. Precast concrete structures shall conform to ASTM C478.

110-2.8 Flowable backfill. ~~Flowable material used to back fill conduit and duct bank trenches shall conform to the requirements of Item P-153, Controlled Low Strength Material.~~

110-2.9 Detectable warning tape. Plastic, detectable, American Public Works Association (APWA) red (electrical power lines, cables, conduit and lighting cable), orange (telephone/fiber optic cabling) with continuous legend magnetic tape shall be polyethylene film with a metallized foil core and shall be 3-6 inches wide. Detectable tape is incidental to the respective bid item.

CONSTRUCTION METHODS

110-3.1 General. The Contractor shall install underground duct banks and conduits at the approximate locations indicated on the plans. The RPR shall indicate specific locations as the work progresses, if required to differ from the plans. Duct banks and conduits shall be of the size, material, and type indicated on the plans or specifications. Where no size is indicated on the plans or in the specifications, conduits shall be not less than 2 inches inside diameter or comply with the National Electrical Code based on cable to be installed, whichever is larger. All duct bank and conduit lines shall be laid so as to grade toward access points and duct or conduit ends for drainage. Unless shown otherwise on the plans, grades shall be at least 3 inches per 100 feet. On runs where it is not practicable to maintain the grade all one way, the duct bank and conduit lines shall be graded from the center in both directions toward access points or conduit ends, with a drain into the storm drainage system. Pockets or traps where moisture may accumulate shall be avoided. Under pavement, the top of the duct bank shall not be less than 18 inches below the

subgrade; in other locations, the top of the duct bank or underground conduit shall be not less than 18 inches below finished grade.

The Contractor shall mandrel each individual conduit whether the conduit is direct-buried or part of a duct bank. An iron-shod mandrel, not more than 1/4 inch smaller than the bore of the conduit shall be pulled or pushed through each conduit. The mandrel shall have a leather or rubber gasket slightly larger than the conduit hole.

The Contractor shall swab out all conduits/ducts and clean base can, manhole, pull boxes, etc., interiors immediately prior to pulling cable. Once cleaned and swabbed the light bases, manholes, pull boxes, etc., and all accessible points of entry to the duct/conduit system shall be kept closed except when installing cables. Cleaning of ducts, base cans, manholes, etc., is incidental to the pay item of the item being cleaned. All raceway systems left open, after initial cleaning, for any reason shall be recleaned at the Contractor's expense. All accessible points shall be kept closed when not installing cable. The Contractor shall verify existing ducts proposed for use in this project as clear and open. The Contractor shall notify the RPR of any blockage in the existing ducts.

For pulling the permanent wiring, each individual conduit, whether the conduit is direct-buried or part of a duct bank, shall be provided with a 200-pound test polypropylene pull rope. The ends shall be secured and sufficient length shall be left in access points to prevent it from slipping back into the conduit. Where spare conduits are installed, as indicated on the plans, the open ends shall be plugged with removable tapered plugs, designed for this purpose.

All conduits shall be securely fastened in place during construction and shall be plugged to prevent contaminants from entering the conduits. Any conduit section having a defective joint shall not be installed. Ducts shall be supported and spaced apart using approved spacers at intervals not to exceed 5 feet.

Unless otherwise shown on the plans, concrete encased duct banks shall be used when crossing under pavements expected to carry aircraft loads, such as runways, taxiways, taxilanes, ramps and aprons. When under paved shoulders and other paved areas, conduit and duct banks shall be encased using flowable fill for protection.

All conduits within concrete encasement of the duct banks shall terminate with female ends for ease in current and future use. Install factory plugs in all unused ends. Do not cover the ends or plugs with concrete.

Where turf is well established and the sod can be removed, it shall be carefully stripped and properly stored.

Trenches for conduits and duct banks may be excavated manually or with mechanical trenching equipment unless in pavement, in which case they shall be excavated with mechanical trenching equipment. Walls of trenches shall be essentially vertical so that a minimum of shoulder surface is disturbed. Blades of graders shall not be used to excavate the trench.

When rock is encountered, the rock shall be removed to a depth of at least 3 inches below the required conduit or duct bank depth and it shall be replaced with bedding material of earth or sand containing no mineral aggregate particles that would be retained on a 1/4-inch sieve. Flowable backfill may alternatively be used. *The Contractor shall ascertain the type of soil or rock to be excavated before bidding. All such rock removal shall be performed and paid subsidiary to the respective trenching or conduit or duct bank pay item.*

Underground electrical warning (Caution) tape shall be installed in the trench above all underground duct banks and conduits in unpaved areas. Contractor shall submit a sample of the proposed warning tape for approval by the RPR. If not shown on the plans, the warning tape shall be located 6 inches above the duct/conduit or the counterpoise wire if present.

Joints in plastic conduit shall be prepared per the manufacturer's recommendations for the particular type of conduit. Plastic conduit shall be prepared by application of a plastic cleaner and brushing a plastic solvent on the outside of the conduit ends and on the inside of the couplings. The conduit fitting shall then be slipped together with a quick one-quarter turn twist to set the joint tightly. Where more than one conduit is placed in a single trench, or in duct banks, joints in the conduit shall be staggered a minimum of 2 feet.

Changes in direction of runs exceeding 10 degrees, either vertical or horizontal, shall be accomplished using manufactured sweep bends.

Whether or not specifically indicated on the drawings, where the soil encountered at established duct bank grade is an unsuitable material, as determined by the RPR, the unsuitable material shall be removed per Item P-152 and replaced with suitable material. Additional duct bank supports shall be installed, as approved by the RPR.

All excavation shall be unclassified and shall be considered incidental to Item L-110. Dewatering necessary for duct installation, and erosion per federal, state, and local requirements is incidental to Item L-110.

Unless otherwise specified, excavated materials that are deemed by the RPR to be unsuitable for use in backfill or embankments shall be removed and disposed of offsite.

Any excess excavation shall be filled with suitable material approved by the RPR and compacted per Item P-152.

It is the Contractor's responsibility to locate existing utilities within the work area prior to excavation. Where existing active cables) cross proposed installations, the Contractor shall ensure that these cables are adequately protected. Where crossings are unavoidable, no splices will be allowed in the existing cables, except as specified on the plans. Installation of new cable where such crossings must occur shall proceed as follows:

a. Existing cables shall be located manually. Unearthed cables shall be inspected to assure absolutely no damage has occurred

b. Trenching, etc., in cable areas shall then proceed with approval of the RPR, with care taken to minimize possible damage or disruption of existing cable, including careful backfilling in area of cable.

In the event that any previously identified cable is damaged during the course of construction, the Contractor shall be responsible for the complete repair.

110-3.2 Duct banks. Unless otherwise shown in the plans, duct banks shall be installed so that the top of the concrete envelope is not less than 18 inches below the bottom of the base or stabilized base course layers where installed under runways, taxiways, aprons, or other paved areas, and not less than 18 inches below finished grade where installed in unpaved areas.

Unless otherwise shown on the plans, duct banks under paved areas shall extend at least 3 feet beyond the edges of the pavement or 3 feet beyond any under drains that may be installed alongside the paved area. Trenches for duct banks shall be opened the complete length before concrete is placed so that if any obstructions are encountered, provisions can be made to avoid them. Unless otherwise shown on the plans, all duct banks shall be placed on a layer of concrete not less than 3 inches thick prior to its initial set. The Contractor shall space the conduits not less than 3 inches apart measured from outside wall to outside wall). All such multiple conduits shall be placed using conduit spacers applicable to the type of conduit. As the conduit laying progresses, concrete shall be placed around and on top of the conduits not less than 3 inches thick unless otherwise shown on the plans. All conduits shall terminate with female ends for ease of access in current and future use. Install factory plugs in all unused ends. Do not cover the ends or plugs with concrete.

Conduits forming the duct bank shall be installed using conduit spacers. No. 4 reinforcing bars shall be driven vertically into the soil a minimum of 6 inches to anchor the assembly into the earth prior to placing the concrete encasement. For this purpose, the spacers shall be fastened down with locking collars attached to the vertical bars. Spacers shall be installed at 5-foot intervals. Spacers shall be in the proper sizes and configurations to fit the conduits. Locking collars and spacers shall be submitted to the RPR for review prior to use.

When specified, the Contractor shall reinforce the bottom side and top of encasements with steel reinforcing mesh or fabric or other approved metal reinforcement. When directed, the Contractor shall supply additional supports where the ground is soft and boggy, where ducts cross under roadways, or where shown on the

plans. Under such conditions, the complete duct structure shall be supported on reinforced concrete footings, piers, or piles located at approximately 5-foot intervals.

All pavement surfaces that are to have ducts installed therein shall be neatly saw cut to form a vertical face. All excavation shall be included in the contract with price for the duct.

Install a plastic, detectable, color as noted, 3 to 6 inches wide tape, 8 inches minimum below grade above all underground conduit or duct lines not installed under pavement. Utilize the 3-inch wide tape only for single conduit runs. Utilize the 6-inch wide tape for multiple conduits and duct banks. For duct banks equal to or greater than 24 inches in width, utilize more than one tape for sufficient coverage and identification of the duct bank as required.

When existing cables are to be placed in split duct, encased in concrete, the cable shall be carefully located and exposed by hand tools. Prior to being placed in duct, the RPR shall be notified so that he may inspect the cable and determine that it is in good condition. Where required, split duct shall be installed as shown on the drawings or as required by the RPR.

110-3.3 Conduits without concrete encasement. Trenches for single-conduit lines shall be not less than 6 inches nor more than 12 inches wide. The trench for 2 or more conduits installed at the same level shall be proportionately wider. Trench bottoms for conduits without concrete encasement shall be made to conform accurately to grade so as to provide uniform support for the conduit along its entire length.

Unless otherwise shown on the plans, a layer of fine earth material, at least 4 inches thick (loose measurement) shall be placed in the bottom of the trench as bedding for the conduit. The bedding material shall consist of soft dirt, sand or other fine fill, and it shall contain no particles that would be retained on a 1/4-inch sieve. The bedding material shall be tamped until firm. Flowable backfill may alternatively be used.

Unless otherwise shown on plans, conduits shall be installed so that the tops of all conduits within the Airport's secured area where trespassing is prohibited are at least 18 inches below the finished grade. Conduits outside the Airport's secured area shall be installed so that the tops of the conduits are at least 24 inches below the finished grade per National Electric Code (NEC), Table 300.5.

When two or more individual conduits intended to carry conductors of equivalent voltage insulation rating are installed in the same trench without concrete encasement, they shall be spaced not less than 3 inches apart (measured from outside wall to outside wall) in a horizontal direction and not less than 6 inches apart in a vertical direction. Where two or more individual conduits intended to carry conductors of differing voltage insulation rating are installed in the same trench without concrete encasement, they shall be placed not less than 3 inches apart (measured from outside wall to outside wall) in a horizontal direction and lot less than 6 inches apart in a vertical direction.

Trenches shall be opened the complete length between normal termination points before conduit is installed so that if any unforeseen obstructions are encountered, proper provisions can be made to avoid them.

Conduits shall be installed using conduit spacers. No. 4 reinforcing bars shall be driven vertically into the soil a minimum of 6 inches to anchor the assembly into the earth while backfilling. For this purpose, the spacers shall be fastened down with locking collars attached to the vertical bars. Spacers shall be installed at 5-foot intervals. Spacers shall be in the proper sizes and configurations to fit the conduits. Locking collars and spacers shall be submitted to the RPR for review prior to use.

110-3.4 Markers. The location of each end and of each change of direction of conduits and duct banks shall be marked by a concrete slab marker 2 feet square and 4 - 6 inches thick extending approximately one inch above the surface. The markers shall also be located directly above the ends of all conduits or duct banks, except where they terminate in a junction/access structure or building. Each cable or duct run from a line of lights and signs to the equipment vault must be marked at approximately every 200 feet along the cable or duct run, with an additional marker at each change of direction of cable or duct run.

The Contractor shall impress the word "DUCT" or "CONDUIT" on each marker slab. Impression of letters shall be done in a manner, approved by the RPR, for a neat, professional appearance. All letters and words must be neatly stenciled. After placement, all markers shall be given one coat of high-visibility orange paint,

as approved by the RPR. The Contractor shall also impress on the slab the number and size of conduits beneath the marker along with all other necessary information as determined by the RPR. The letters shall be 4 inches high and 3 inches wide with width of stroke 1/2 inch and 1/4 inch deep or as large as the available space permits. Furnishing and installation of duct markers is incidental to the respective duct pay item.

110-3.5 Backfilling for conduits. For conduits, 8 inches of sand, soft earth, or other fine fill (loose measurement) shall be placed around the conduits ducts and carefully tamped around and over them with hand tampers. The remaining trench shall then be backfilled and compacted per Item P-152 except that material used for back fill shall be select material not larger than 4 inches in diameter.

Flowable backfill may alternatively be used.

Trenches shall not contain pools of water during back filling operations.

The trench shall be completely backfilled and tamped level with the adjacent surface; except that, where sod is to be placed over the trench, the backfilling shall be stopped at a depth equal to the thickness of the sod to be used, with proper allowance for settlement.

Any excess excavated material shall be removed and disposed of per instructions issued by the RPR.

110-3.6 Backfilling for duct banks. After the concrete has cured, the remaining trench shall be backfilled and compacted per Item P-152 "Excavation and Embankment" except that the material used for backfill shall be select material not larger than 4 inches in diameter. In addition to the requirements of Item P-152, where duct banks are installed under pavement, one moisture/density test per lift shall be made for each 250 linear feet of duct bank or one work period's construction, whichever is less.

Flowable backfill may alternatively be used.

Trenches shall not contain pools of water during backfilling operations.

The trench shall be completely backfilled and tamped level with the adjacent surface; except that, where sod is to be placed over the trench, the backfilling shall be stopped at a depth equal to the thickness of the sod to be used, with proper allowance for settlement.

Any excess excavated material shall be removed and disposed of per instructions issued by the RPR.

110-3.7 Restoration. Where sod has been removed, it shall be replaced as soon as possible after the backfilling is completed. All areas disturbed by the work shall be restored to its original condition. The restoration shall include topsoiling, seeding, and mulching shown on the plans. The Contractor shall be held responsible for maintaining all disturbed surfaces and replacements until final acceptance. All restoration shall be considered incidental to the respective L-110 pay item. Following restoration of all trenching near airport movement surfaces, the Contractor shall thoroughly visually inspect the area for foreign object debris (FOD), and remove any such FOD that is found. This FOD inspection and removal shall be considered incidental to the pay item of which it is a component part.

110-3.8 Ownership of removed cable. *Where existing cabling indicated on the plans for removal or demolition is removed, it is the responsibility of the contractor to dispose of offsite via recycling methods. The electrical contractor is the owner of the removed cabling.*

METHOD OF MEASUREMENT

110-4.1 Underground conduits and duct banks shall be measured by the linear feet of conduits and duct banks installed, including encasement, locator tape, trenching and backfill with designated material, and restoration, and for drain lines, the termination at the drainage structure, *coupling to existing conduit where indicated in the plans,* all measured in place, completed, and accepted. Separate measurement shall be made for the various types and sizes.

BASIS OF PAYMENT

110-5.1 Payment will be made at the contract unit price per linear foot for each type and size of conduit and duct bank completed and accepted, including trench and backfill with the designated material, and, for drain lines, the termination at the drainage structure. This price shall be full compensation for removal and disposal of existing duct banks and conduits as shown on the plans, furnishing all materials and for all preparation, assembly, and installation of these materials, and for all labor, equipment, tools, and incidentals necessary to complete this item per the provisions and intent of the plans and specifications.

Payment will be made under:

Item L-110-5.1	Non-Encased Electrical Duct Bank, 1-Way 2"C - per Linear Foot
Item L-110-5.2	Non-Encased Electrical Duct Bank, 2-Way 2"C - per Linear Foot

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

Advisory Circular (AC)

AC 150/5340-30	Design and Installation Details for Airport Visual Aids
AC 150/5345-53	Airport Lighting Equipment Certification Program

ASTM International (ASTM)

ASTM A615	Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement

National Fire Protection Association (NFPA)

NFPA-70	National Electrical Code (NEC)

Underwriters Laboratories (UL)

UL Standard 6	Electrical Rigid Metal Conduit - Steel
UL Standard 514B	Conduit, Tubing, and Cable Fittings
UL Standard 514C	Nonmetallic Outlet Boxes, Flush-Device Boxes, and Covers
UL Standard 1242	Electrical Intermediate Metal Conduit Steel
UL Standard 651	Schedule 40, 80, Type EB and A Rigid PVC Conduit and Fittings
UL Standard 651A	Type EB and A Rigid PVC Conduit and HDPE Conduit

END OF ITEM L-110

PAGE INTENTIONALLY BLANK

ITEM L-115 ELECTRICAL JUNCTION STRUCTURES

DESCRIPTION

115-1.1 This item shall consist of electrical manholes and junction structures (hand holes, pull boxes, junction cans, etc.) installed per this specification, at the indicated locations and conforming to the lines, grades and dimensions shown on the plans or as required by the RPR. This item shall include the installation of each electrical manhole and/or junction structures with all associated excavation, backfilling, sheeting and bracing, concrete, reinforcing steel, ladders, appurtenances, testing, dewatering and restoration of surfaces to the satisfaction of the RPR.

EQUIPMENT AND MATERIALS

115-2.1 General.

a. All equipment and materials covered by referenced specifications shall be subject to acceptance through manufacturer's certification of compliance with the applicable specification when so requested by the RPR.

b. Manufacturer's certifications shall not relieve the Contractor of the responsibility to provide materials per these specifications. Materials supplied and/or installed that do not comply with these specifications shall be removed (when directed by the RPR) and replaced with materials that comply with these specifications at the Contractor's cost.

c. All materials and equipment used to construct this item shall be submitted to the RPR for approval prior to ordering the equipment. Submittals consisting of marked catalog sheets or shop drawings shall be provided. Submittal data shall be presented in a clear, precise and thorough manner. Original catalog sheets are preferred. Photocopies are acceptable provided they are as good a quality as the original. Clearly and boldly mark each copy to identify products or models applicable to this project. Indicate all optional equipment and delete any non-pertinent data. Submittals for components of electrical equipment and systems shall identify the equipment to which they apply on each submittal sheet. Markings shall be made bold and clear with arrows or circles (highlighting is not acceptable). The Contractor is solely responsible for delays in the project that may accrue directly or indirectly from late submissions or resubmissions of submittals.

d. The data submitted shall be sufficient, in the opinion of the RPR, to determine compliance with the plans and specifications. The Contractor's submittals shall be electronically submitted in pdf format, tabbed by specification section. The RPR reserves the right to reject any and all equipment, materials or procedures that do not meet the system design and the standards and codes, specified in this document.

e. All equipment and materials furnished and installed under this section shall be guaranteed against defects in materials and workmanship for a period of at least twelve (12) months from the date of final acceptance by the Owner. The defective materials and/or equipment shall be repaired or replaced, at the Owner's discretion, with no additional cost to the Owner.

115-2.2 Concrete structures. Concrete shall be proportioned, placed, and cured per Item P-610, Concrete for Miscellaneous Structures. Cast-in-place concrete structures shall be as shown on the plans.

115-2.3 Precast concrete structures. Precast concrete structures shall be furnished by a plant meeting National Precast Concrete Association Plant Certification Program or another engineer approved third party certification program. Provide precast concrete structures where shown on the plans.

Precast concrete structures shall be an approved standard design of the manufacturer. Precast units shall have mortar or bitumastic sealer placed between all joints to make them watertight. The structure shall be designed to withstand **100,000** lb. aircraft wheel loads, unless otherwise shown on the plans. Openings or knockouts shall be provided in the structure as detailed on the plans.

Threaded inserts and pulling eyes shall be cast in as shown on the plans.

If the Contractor chooses to propose a different structural design, signed and sealed shop drawings, design calculations, and other information requested by the RPR shall be submitted by the Contractor to allow for a full evaluation by the RPR. The RPR shall review per the process defined in the General Provisions.

115-2.4 Junction boxes. Junction boxes shall be L-867 Class 1 (non-load bearing) or L-868 Class 1 (load bearing) airport light bases that are encased in concrete. The light bases shall have a L-894 blank cover, gasket, and stainless steel hardware. All bolts, studs, nuts, lock washers, and other similar fasteners used for the light fixture assemblies must be fabricated from 316L (equivalent to EN 1.4404), 18-8, 410, or 416 stainless steel. If 18-8, 410, or 416 stainless steel is utilized it shall be passivated and be free from any discoloration. Covers shall be 3/8-inch thickness for L-867 and 3/4-inch thickness for L-868. All junction boxes shall be provided with both internal and external ground lugs.

115-2.5 Mortar. The mortar shall be composed of one part of cement and two parts of mortar sand, by volume. The cement shall be per the requirements in ASTM C150, Type I. The sand shall be per the requirements in ASTM C144. Hydrated lime may be added to the mixture of sand and cement in an amount not to exceed 15% of the weight of cement used. The hydrated lime shall meet the requirements of ASTM C206. Water shall be potable, reasonably clean and free of oil, salt, acid, alkali, sugar, vegetable, or other substances injurious to the finished product.

115-2.6 Concrete. ~~Concrete shall be proportioned, placed, and cured per Item P-610, Concrete for Miscellaneous Structures.~~ *Refer to Specification SS-300 for concrete requirements.*

115-2.7 Frames and covers. The frames shall conform to one of the following requirements:

a. ASTM A48 Gray iron castings

b. ASTM A47 Malleable iron castings

c. ASTM A27 Steel castings

d. ASTM A283, Grade D Structural steel for grates and frames

e. ASTM A536 Ductile iron castings

f. ASTM A897 Austempered ductile iron castings

All castings specified shall withstand a maximum tire pressure of 250 psi and maximum load of 100,000 lbs.

All castings or structural steel units shall conform to the dimensions shown on the plans and shall be designed to support the loadings specified.

Each frame and cover unit shall be provided with fastening members to prevent it from being dislodged by traffic, but which will allow easy removal for access to the structure.

All castings shall be thoroughly cleaned. After fabrication, structural steel units shall be galvanized to meet the requirements of ASTM A123.

Each cover shall have the word "ELECTRIC" or other approved designation cast on it. Each frame and cover shall be as shown on the plans or approved equivalent. No cable notches are required.

Each manhole shall be provided with a "DANGER -- PERMIT-REQUIRED CONFINED SPACE, DO NOT ENTER" safety warning sign as detailed in the Contract Documents and in accordance with OSHA 1910.146 (c)(2).

115-2.8 Ladders. ~~Ladders, if specified, shall be galvanized steel or as shown on the plans.~~

115-2.9 Reinforcing steel. All reinforcing steel shall be deformed bars of new billet steel meeting the requirements of ASTM A615, Grade 60.

115-2.10 Bedding/special backfill. Bedding or special backfill shall be as shown on the plans.

115-2.11 Flowable backfill. ~~Flowable material used to backfill shall conform to the requirements of Item P-153, Controlled Low Strength Material.~~

115-2.12 Cable trays. ~~Cable trays shall be of [galvanized steel][plastic][aluminum]. Cable trays shall be located as shown on the plans.~~

115-2.13 Plastic conduit. Plastic conduit shall comply with Item L-110, Airport Underground Electrical Duct Banks and Conduits.

115-2.14 Conduit terminators. Conduit terminators shall be pre-manufactured for the specific purpose and sized as required or as shown on the plans.

115-2.15 Pulling-in irons. Pulling-in irons shall be manufactured with 7/8-inch diameter hot-dipped galvanized steel or stress-relieved carbon steel roping designed for concrete applications (7 strand, 1/2-inch diameter with an ultimate strength of 270,000 psi). Where stress-relieved carbon steel roping is used, a rustproof sleeve shall be installed at the hooking point and all exposed surfaces shall be encapsulated with a polyester coating to prevent corrosion.

115-2.16 Ground rods. Ground rods shall be one piece, or copper clad steel. The ground rods shall be of the length and diameter specified on the plans, but in no case shall they be less than 8 feet long nor less than 5/8 inch in diameter.

CONSTRUCTION METHODS

115-3.1 Unclassified excavation. It is the Contractor's responsibility to locate existing utilities within the work area prior to excavation. Damage to utility lines, through lack of care in excavating, shall be repaired or replaced to the satisfaction of the RPR without additional expense to the Owner.

The Contractor shall perform excavation for structures and structure footings to the lines and grades or elevations shown on the plans or as staked by the RPR. The excavation shall be of sufficient size to permit the placing of the full width and length of the structure or structure footings shown.

All excavation shall be unclassified and shall be considered incidental to Item L-115. Dewatering necessary for structure installation and erosion per federal, state, and local requirements is incidental to Item L-115.

Boulders, logs and all other objectionable material encountered in excavation shall be removed. All rock and other hard foundation material shall be cleaned of all loose material and cut to a firm surface either level, stepped or serrated, as directed by the RPR. All seams, crevices, disintegrated rock and thin strata shall be removed. When concrete is to rest on a surface other than rock, special care shall be taken not to disturb the bottom of the excavation. Excavation to final grade shall not be made until just before the concrete or reinforcing is to be placed.

The Contractor shall provide all bracing, sheeting and shoring necessary to implement and protect the excavation and the structure as required for safety or conformance to governing laws. The cost of bracing, sheeting and shoring shall be included in the unit price bid for the structure.

Unless otherwise provided, bracing, sheeting and shoring involved in the construction of this item shall be removed by the Contractor after the completion of the structure. Removal shall be effected in a manner that will not disturb or mar finished masonry. The cost of removal shall be included in the unit price bid for the structure.

After each excavation is completed, the Contractor shall notify the RPR. Structures shall be placed after the RPR has approved the depth of the excavation and the suitability of the foundation material.

Prior to installation the Contractor shall provide a minimum of 6 inches (150 mm) of sand or a material approved by the RPR as a suitable base to receive the structure. The base material shall be compacted and graded level and at proper elevation to receive the structure in proper relation to the conduit grade or ground cover requirements, as indicated on the plans.

115-3.2 Concrete structures. Concrete structures shall be built on prepared foundations conforming to the dimensions and form indicated on the plans. The concrete and construction methods shall conform to the requirements specified in Item ~~P-610~~ *SS-300*. Any reinforcement required shall be placed as indicated on the plans and shall be approved by the RPR before the concrete is placed.

115-3.3 Precast unit installations. Precast units shall be installed plumb and true. Joints shall be made watertight by use of sealant at each tongue-and-groove joint and at roof of manhole. Excess sealant shall be removed and severe surface projections on exterior of neck shall be removed.

115-3.4 Placement and treatment of castings, frames and fittings. All castings, frames and fittings shall be placed in the positions indicated on the Plans or as directed by the RPR and shall be set true to line and to correct elevation. If frames or fittings are to be set in concrete or cement mortar, all anchors or bolts shall be in place and position before the concrete or mortar is placed. The unit shall not be disturbed until the mortar or concrete has set.

Field connections shall be made with bolts, unless indicated otherwise. Welding will not be permitted unless shown otherwise on the approved shop drawings and written approval is granted by the casting manufacturer. Erection equipment shall be suitable and safe for the workman. Errors in shop fabrication or deformation resulting from handling and transportation that prevent the proper assembly and fitting of parts shall be reported immediately to the RPR and approval of the method of correction shall be obtained. Approved corrections shall be made at Contractor's expense.

Anchor bolts and anchors shall be properly located and built into connection work. Bolts and anchors shall be preset by the use of templates or such other methods as may be required to locate the anchors and anchor bolts accurately.

Pulling-in irons shall be located opposite all conduit entrances into structures to provide a strong, convenient attachment for pulling-in blocks when installing cables. Pulling-in irons shall be set directly into the concrete walls of the structure.

115-3.5 Installation of ladders. ~~Ladders shall be installed such that they may be removed if necessary. Mounting brackets shall be supplied top and bottom and shall be cast in place during fabrication of the structure or drilled and grouted in place after erection of the structure.~~

115-3.6 Removal of sheeting and bracing. In general, all sheeting and bracing used to support the sides of trenches or other open excavations shall be withdrawn as the trenches or other open excavations are being refilled. That portion of the sheeting extending below the top of a structure shall be withdrawn, unless otherwise directed, before more than 6 inches of material is placed above the top of the structure and before any bracing is removed. Voids left by the sheeting shall be carefully refilled with selected material and rammed tight with tools especially adapted for the purpose or otherwise as may be approved.

The RPR may direct the Contractor to delay the removal of sheeting and bracing if, in his judgment, the installed work has not attained the necessary strength to permit placing of backfill.

115-3.7 Backfilling. After a structure has been completed, the area around it shall be backfilled in horizontal layers not to exceed 6 inches in thickness measured after compaction to the density requirements in Item P-152. Each layer shall be deposited all around the structure to approximately the same elevation. The top of the fill shall meet the elevation shown on the plans or as directed by the RPR.

Backfill shall not be placed against any structure until approval is given by the RPR. In the case of concrete, such approval shall not be given until tests made by the laboratory under supervision of the RPR establish that the concrete has attained sufficient strength to provide a factor of safety against damage or strain in withstanding any pressure created by the backfill or the methods used in placing it.

Where required, the RPR may direct the Contractor to add, at his own expense, sufficient water during compaction to assure a complete consolidation of the backfill. The Contractor shall be responsible for all damage or injury done to conduits, duct banks, structures, property or persons due to improper placing or compacting of backfill.

115-3.8 Connection of duct banks. To relieve stress of joint between concrete-encased duct banks and structure walls, reinforcement rods shall be placed in the structure wall and shall be formed and tied into duct bank reinforcement at the time the duct bank is installed.

115-3.9 Grounding. A ground rod shall be installed in the floor of all concrete structures so that the top of rod extends 6 inches above the floor. The ground rod shall be installed within one foot of a corner of the concrete structure. Ground rods shall be installed prior to casting the bottom slab. Where the soil condition does not permit driving the ground rod into the earth without damage to the ground rod, the Contractor shall drill a 4-inch diameter hole into the earth to receive the ground rod. The hole around the ground rod shall be filled throughout its length, below slab, with Portland cement grout. Ground rods shall be installed in precast bottom slab of structures by drilling a hole through bottom slab and installing the ground rod. Bottom slab penetration shall be sealed watertight with Portland cement grout around the ground rod.

A grounding bus of 4/0 bare stranded copper shall be exothermically bonded to the ground rod and loop the concrete structure walls. The ground bus shall be a minimum of one foot above the floor of the structure and separate from other cables. No. 2 American wire gauge (AWG) bare copper pigtails shall bond the grounding bus to all cable trays and other metal hardware within the concrete structure. Connections to the grounding bus shall be exothermic. If an exothermic weld is not possible, connections to the grounding bus shall be made by using connectors approved for direct burial in soil or concrete per UL 467. Hardware connections may be mechanical, using a lug designed for that purpose.

115-3.10 Cleanup and repair. After erection of all galvanized items, damaged areas shall be repaired by applying a liquid cold-galvanizing compound per MIL-P-21035. Surfaces shall be prepared and compound applied per the manufacturer's recommendations.

Prior to acceptance, the entire structure shall be cleaned of all dirt and debris.

115-3.11 Restoration. After the backfill is completed, the Contractor shall dispose of all surplus material, dirt and rubbish from the site. The Contractor shall restore all disturbed areas equivalent to or better than their original condition. All sodding, grading and restoration shall be considered incidental to the respective Item L-115 pay item.

The Contractor shall grade around structures as required to provide positive drainage away from the structure.

Areas with special surface treatment, such as roads, sidewalks, or other paved areas shall have backfill compacted to match surrounding areas, and surfaces shall be repaired using materials comparable to original materials.

Following restoration of all trenching near airport movement surfaces, the Contractor shall thoroughly visually inspect the area for foreign object debris (FOD), and remove any such FOD that is found. This FOD inspection and removal shall be considered incidental to the pay item of which it is a component part.

After all work is completed, the Contractor shall remove all tools and other equipment, leaving the entire site free, clear and in good condition.

115-3.12 Inspection. Prior to final approval, the electrical structures shall be thoroughly inspected for conformance with the plans and this specification. Any indication of defects in materials or workmanship shall be further investigated and corrected. The earth resistance to ground of each ground rod shall not exceed 25 ohms. Each ground rod shall be tested using the fall-of-potential ground impedance test per American National Standards Institute / Institute of Electrical and Electronic Engineers (ANSI/IEEE) Standard 81. This test shall be performed prior to establishing connections to other ground electrodes.

115-3.13 Manhole elevation adjustments. ~~The Contractor shall adjust the tops of existing manholes in areas designated in the Contract Documents to the new elevations shown. The Contractor shall be responsible for determining the exact height adjustment required to raise or lower the top of each manhole to the new elevations. The existing top elevation of each manhole to be adjusted shall be determined in the field and subtracted/added from the proposed top elevation.~~

~~The Contractor shall remove/extend the existing top section or ring and cover on the manhole structure or manhole access. The Contractor shall install precast concrete sections or grade rings of the required dimensions to adjust the manhole top to the new proposed elevation or shall cut the existing manhole walls to shorten the existing structure, as required by final grades. The Contractor shall reinstall the manhole top section or ring and cover on top and check the new top elevation.~~

~~The Contractor shall construct a concrete slab around the top of adjusted structures located in graded areas that are not to be paved. The concrete slab shall conform to the dimensions shown on the plans.~~

115-3.14 Duct extension to existing ducts. Where existing concrete encased ducts are to be extended, the duct extension shall be concrete encased plastic conduit. The fittings to connect the ducts together shall be standard manufactured connectors designed and approved for the purpose. The duct extensions shall be installed according to the concrete encased duct detail and as shown on the plans.

METHOD OF MEASUREMENT

115-4.1 Electrical junction structures shall be measured by each unit completed in place and accepted. The following items shall be included in the price of each unit: All required excavation and dewatering; sheeting and bracing; all required backfilling with on-site materials; restoration of all surfaces and finished grading and turfing; all required connections; temporary cables and connections; and ground rod testing

BASIS OF PAYMENT

115-5.1 The accepted quantity of electrical junction structures will be paid for at the Contract unit price per each, complete and in place. This price shall be full compensation for furnishing all materials and for all preparation, excavation, backfilling and placing of the materials, furnishing and installation of appurtenances and connections to duct banks and other structures as may be required to complete the item as shown on the plans and for all labor, equipment, tools and incidentals necessary to complete the structure.

Payment will be made under:

Item L-115-5.1	Concrete Encased Electrical Junction Structure, L-867D Class 1, Size 16" Diameter by 24" Depth- Per Each
Item L-115-5.2	Concrete Encased Electrical Junction Structure Plaza, Two L-867D Class 1, Size 16" Diameter by 24" Depth- Per Each

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

American National Standards Institute / Insulated Cable Engineers Association (ANSI/ICEA)

ANSI/IEEE STD 81	IEEE Guide for Measuring Earth Resistivity, Ground Impedance, and Earth Surface Potentials of a Ground System

Advisory Circular (AC)

AC 150/5345-7	Specification for L-824 Underground Electrical Cable for Airport Lighting Circuits
AC 150/5345-26	Specification for L-823 Plug and Receptacle, Cable Connectors
AC 150/5345-42	Specification for Airport Light Bases, Transformer Housings, Junction Boxes, and Accessories

AC 150/5340-30	Design and Installation Details for Airport Visual Aids
AC 150/5345-53	Airport Lighting Equipment Certification Program

Commercial Item Description (CID)

A-A 59544	Cable and Wire, Electrical (Power, Fixed Installation)

ASTM International (ASTM)

ASTM A27	Standard Specification for Steel Castings, Carbon, for General Application
ASTM A47	Standard Specification for Ferritic Malleable Iron Castings
ASTM A48	Standard Specification for Gray Iron Castings
ASTM A123	Standard Specification for Zinc (Hot Dip Galvanized) Coatings on Iron and Steel Products
ASTM A283	Standard Specification for Low and Intermediate Tensile Strength Carbon Steel Plates
ASTM A536	Standard Specification for Ductile Iron Castings
ASTM A615	Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement
ASTM A897	Standard Specification for Austempered Ductile Iron Castings
ASTM C144	Standard Specification for Aggregate for Masonry Mortar
ASTM C150	Standard Specification for Portland Cement
ASTM C206	Standard Specification for Finishing Hydrated Lime

FAA Engineering Brief (EB)

EB #83	In Pavement Light Fixture Bolts

Mil Spec

MIL-P-21035	Paint High Zinc Dust Content, Galvanizing Repair

National Fire Protection Association (NFPA)

NFPA-70	National Electrical Code (NEC)

END OF ITEM L-115

PAGE INTENTIONALLY BLANK

ITEM L-125 INSTALLATION OF AIRPORT LIGHTING SYSTEMS

DESCRIPTION

125-1.1 This item shall consist of airport lighting systems furnished and installed in accordance with this specification, the referenced specifications, and the applicable advisory circulars (ACs). The systems shall be installed at the locations and in accordance with the dimensions, design, and details shown in the plans. This item shall include the furnishing of all equipment, materials, services, and incidentals necessary to place the systems in operation as completed units to the satisfaction of the RPR.

EQUIPMENT AND MATERIALS

125-2.1 General.

a. Airport lighting equipment and materials covered by Federal Aviation Administration (FAA) specifications shall be certified under the Airport Lighting Equipment Certification Program in accordance with AC 150/5345-53, current version. FAA certified airfield lighting shall be compatible with each other to perform in compliance with FAA criteria and the intended operation. If the Contractor provides equipment that does not performs as intended because of incompatibility with the system, the Contractor assumes all costs to correct the system for to operate properly.

b. Manufacturer's certifications shall not relieve the Contractor of their responsibility to provide materials in accordance with these specifications and acceptable to the RPR. Materials supplied and/or installed that do not comply with these specifications shall be removed, when directed by the RPR and replaced with materials, which do comply with these specifications, at the sole cost of the Contractor.

c. All materials and equipment used shall be submitted to the RPR for approval prior to ordering the equipment. Submittals consisting of marked catalog sheets or shop drawings shall be provided. Clearly mark each copy to identify pertinent products or models applicable to this project. Indicate all optional equipment and delete non-pertinent data. Submittals for components of electrical equipment and systems shall identify the equipment for which they apply on each submittal sheet. Markings shall be clearly made with arrows or circles (highlighting is not acceptable). The Contractor shall be responsible for delays in the project accruing directly or indirectly from late submissions or resubmissions of submittals.

d. The data submitted shall be sufficient, in the opinion of the RPR, to determine compliance with the plans and specifications. The Contractor's submittals shall be submitted in electronic PDF format, tabbed by specification section. The RPR reserves the right to reject any or all equipment, materials or procedures, which, in the RPR's opinion, does not meet the system design and the standards and codes, specified herein.

e. All equipment and materials furnished and installed under this section shall be guaranteed against defects in materials and workmanship for a period of at least twelve (12) months from final acceptance by the Owner. The defective materials and/or equipment shall be repaired or replaced, at the Owner's discretion, with no additional cost to the Owner.

EQUIPMENT AND MATERIALS

125-2.2 Conduit/Duct. Conduit shall conform to Specification Item L-110 Airport Underground Electrical Duct Banks and Conduits.

125-2.3 Cable and Counterpoise. Cable and Counterpoise shall conform to Item L-108 Underground Power Cable for Airports.

125-2.4 Tape. Rubber and plastic electrical tapes shall be Scotch Electrical Tape Numbers 23 and 88 respectively, as manufactured by 3M Company or an approved equal.

125-2.5 Cable Connections. Cable Connections shall conform to Item L-108 Installation of Underground Cable for Airports.

125-2.6 Retroreflective Markers. Retroreflective markers shall be type L-853 and shall conform to the requirements of AC 150/5345-39.

125-2.7 Runway and Taxiway Lights. ~~Runway and taxiway lights shall conform to the requirements of AC 150/5345-46. Lamps shall be of size and type indicated, or as required by fixture manufacturer for each lighting fixture required under this contract. Filters shall be of colors conforming to the specification for the light concerned or to the standard referenced.~~

~~**Lights**~~

~~Type~~	~~Class~~	~~Mode~~	~~Style~~	~~Option~~	~~Base~~	~~Filter~~	~~Transformer~~	~~Notes~~
~~[___]~~	~~[___]~~	~~[___]~~	~~[___]~~	~~[___]~~	~~[___]~~	~~[___]~~	~~[___]~~	~~[___]~~

125-2.8 Runway and Taxiway Signs. ~~Runway and Taxiway Guidance Signs should conform to the requirements of AC 150/5345-44.~~

~~Signs~~

~~Type~~	~~Size~~	~~Style~~	~~Class~~	~~Mode~~	~~Notes~~
~~[___]~~	~~[___]~~	~~[___]~~	~~[___]~~	~~[___]~~	~~[___]~~

125-2.9 Runway End Identifier Light (REIL). Not required.

125-2.10 Precision Approach Path Indicator (PAPI). Not required.

125-2.11 Circuit Selector Cabinet. ~~The circuit selector cabinet shall meet the requirements of AC 150/5345-5, Type L-847, [one][two][three][four] circuit control [as indicated], Class [A, indoor][B, outdoor], Rating [1, for 6.6 amperes][2, for 20 amperes].~~

125-2.12 Light Base and Transformer Housings. ~~Light Base and Transformer Housings should conform to the requirements of AC 150/5345-42. Light bases shall be Type [L-867][L-868], Class [1A][1B][2A][2B], Size [A][B][C] shall be provided as indicated or as required to accommodate the fixture or device installed thereon. Base plates, cover plates, and adapter plates shall be provided to accommodate various sizes of fixtures.~~

125-2.13 Isolation Transformers. ~~Isolation Transformers shall be Type [L-830][L-831], size as required for each installation. Transformer shall conform to AC 150/5345-47.~~

INSTALLATION

125-3.1 Installation. The Contractor shall furnish, install, connect and test all equipment, accessories, conduit, cables, wires, buses, grounds and support items necessary to ensure a complete and operable airport lighting system as specified here and shown in the plans.

The equipment installation and mounting shall comply with the requirements of the National Electrical Code and state and local code agencies having jurisdiction.

The Contractor shall install the specified equipment in accordance with the applicable advisory circulars and the details shown on the plans.

125-3.2 Testing. All lights shall be fully tested by continuous operation for not less than 24 hours as a completed system prior to acceptance. The test shall include operating the constant current regulator in each step not less than 10 times at the beginning and end of the 24-hour test. The fixtures shall illuminate properly during each portion of the test.

125-3.3 Shipping and Storage. Equipment shall be shipped in suitable packing material to prevent damage during shipping. Store and maintain equipment and materials in areas protected from weather and physical damage. Any equipment and materials, in the opinion of the RPR, damaged during construction or storage shall be replaced by the Contractor at no additional cost to the owner. Painted or galvanized surfaces that are damaged shall be repaired in accordance with the manufacturer's recommendations.

125-3.4 Elevated and In-pavement Lights. ~~Water, debris, and other foreign substances shall be removed prior to installing fixture base and light.~~

~~A jig or holding device shall be used when installing each light fixture to ensure positioning to the proper elevation, alignment, level control, and azimuth control. Light fixtures shall be oriented with the light beams parallel to the runway or taxiway centerline and facing in the required direction. The outermost edge of fixture shall be level with the surrounding pavement. Surplus sealant or flexible embedding material shall be removed. The holding device shall remain in place until sealant has reached its initial set.~~

METHOD OF MEASUREMENT

125-4.1 Reflective markers will be measured by the number installed as completed units in place, ready for operation, and accepted by the RPR.

BASIS OF PAYMENT

125-5.1 Payment will be made at the Contract unit price for each complete reflective marker installed by the Contractor and accepted by the RPR. This payment will be full compensation for furnishing all materials and for all preparation, assembly, and installation of these materials, and for all labor, equipment, tools and incidentals necessary to complete this item.

Payment will be made under:

Item L-125-5.1	L-853 Elevated Retroreflective Markers with Concrete Pad, Installed -- per Each

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

Advisory Circulars (AC)

AC 150/5340-18	Standards for Airport Sign Systems
AC 150/5340-26	Maintenance of Airport Visual Aid Facilities
AC 150/5340-30	Design and Installation Details for Airport Visual Aids
AC 150/5345-5	Circuit Selector Switch
AC 150/5345-7	Specification for L-824 Underground Electrical Cable for Airport Lighting Circuits
AC 150/5345-26	Specification for L-823 Plug and Receptacle, Cable Connectors
AC 150/5345-28	Precision Approach Path Indicator (PAPI) Systems

AC 150/5345-39	Specification for L-853, Runway and Taxiway Retroreflective Markers
AC 150/5345-42	Specification for Airport Light Bases, Transformer Housings, Junction Boxes, and Accessories
AC 150/5345-44	Specification for Runway and Taxiway Signs
AC 150/5345-46	Specification for Runway and Taxiway Light Fixtures
AC 150/5345-47	Specification for Series to Series Isolation Transformers for Airport Lighting Systems
AC 150/5345-51	Specification for Discharge-Type Flashing Light Equipment
AC 150/5345-53	Airport Lighting Equipment Certification Program

Engineering Brief (EB)

EB No. 67	Light Sources Other than Incandescent and Xenon for Airport and Obstruction Lighting Fixtures

END OF ITEM L-125

ITEM P-101 PREPARATION/REMOVAL OF EXISTING PAVEMENTS

DESCRIPTION

101-1.1 This item shall consist of preparation of existing pavement surfaces for overlay, surface treatments, removal of existing pavement, and other miscellaneous items. The work shall be accomplished in accordance with these specifications and the applicable plans.

***101-1.2** Limits of pavement removal, pavement repair, joint and crack repair, paint and rubber removal, and cold milling are estimated in the plans. Actual limits of these items shall be coordinated with the Engineer prior to construction.*

EQUIPMENT AND MATERIALS

101-2 All equipment and materials shall be specified here and in the following paragraphs or approved by the Resident Project Representative (RPR). The equipment shall not cause damage to the pavement to remain in place.

CONSTRUCTION

101-3.1 Removal of existing pavement.

The Contractor's removal operation shall be controlled to not damage adjacent pavement structure, and base material, cables, utility ducts, pipelines, or drainage structures which are to remain under the pavement.

~~**a. Concrete pavement removal.** Full depth saw cuts shall be made perpendicular to the slab surface. The Contractor shall saw through the full depth of the slab including any dowels at the joint, removing the pavement and installing new dowels as shown on the plans and per the specifications. Where the perimeter of the removal limits is not located on the joint and there are no dowels present, the perimeter shall be saw cut the full depth of the pavement. The pavement inside the saw cut shall be removed by methods which will not cause distress in the pavement which is to remain in place. If the material is to be wasted on the airport site, it shall be reduced to a maximum size of [___]. Concrete slabs that are damaged by under breaking shall be repaired or removed and replaced as directed by the RPR.~~

~~The edge of existing concrete pavement against which new pavement abuts shall be protected from damage at all times. Spall and underbreak repair shall be in accordance with the plans. Any underlaying material that is to remain in place, shall be recompacted and/or replaced as shown on the plans. Adjacent areas damaged during repair shall be repaired or replaced at the Contractor's expense.~~

b. Asphalt pavement removal. Asphalt pavement to be removed shall be cut to the full depth of the asphalt pavement around the perimeter of the area to be removed. ~~If the material is to be [wasted on the airport site] [incorporated into embankment], it shall be [broken to a maximum size of [___] inches.] [meet the following gradation: [___].~~

c. Repair or removal of Base, Subbase, and/or Subgrade. All failed material including surface, base course, subbase course, and subgrade shall be removed and repaired as shown on the plans or as directed by the RPR. Materials and methods of construction shall comply with the applicable sections of these specifications. Any damage caused by Contractor's removal process shall be repaired at the Contractor's expense.

***d. Disposal.** All existing pavement removed shall be disposed of off-site. All hauling will be considered a necessary and incidental part of the work. Its costs shall be considered by the Contractor and included in the contract unit price for the pay items of work involved. No payment will be made separately or directly for hauling on any part of the work.*

~~**101-3.2 Preparation of joints and cracks prior to overlay/surface treatment.** Remove all vegetation and debris from cracks to a minimum depth of 1 inch. If extensive vegetation exists, treat the specific area with a concentrated solution of a water-based herbicide approved by the RPR. Fill all cracks greater than~~

1/4 inch wide with a crack sealant [per ASTM D6690]. The crack sealant, preparation, and application shall be compatible with the surface treatment/overlay to be used. To minimize contamination of the asphalt with the crack sealant, underfill the crack sealant a minimum of 1/8 inch, not to exceed ¼ inch. Any excess joint or crack sealer shall be removed from the pavement surface.

[Wider cracks (over 1-1/2 inch wide), along with soft or sunken spots, indicate that the pavement or the pavement base should be repaired or replaced as stated below.

Cracks and joints may be filled with a mixture of emulsified asphalt and aggregate. The aggregate shall consist of limestone, volcanic ash, sand, or other material that will cure to form a hard substance. The combined gradation shall be as shown in the following table.

Gradation

Sieve Size	Percent Passing
No. 4 (4.75 mm)	100
No. 8 (2.36 mm)	90-100
No. 16 (1.18 mm)	65-90
No. 30 (600 µm)	40-60
No. 50 (300 µm)	25-42
No. 100 (150 µm)	15-30
No. 200 (75 µm)	10-20

Up to 3% cement can be added to accelerate the set time. The mixture shall not contain more than 20% natural sand without approval in writing from the RPR.

The proportions of asphalt emulsion and aggregate shall be determined in the field and may be varied to facilitate construction requirements. Normally, these proportions will be approximately one part asphalt emulsion to five parts aggregate by volume. The material shall be poured or placed into the joints or cracks and compacted to form a voidless mass. The joint or crack shall be filled to within +0 to -1/8 inches of the surface. Any material spilled outside the width of the joint shall be removed from the pavement surface prior to constructing the overlay. Where concrete overlays are to be constructed, only the excess joint material on the pavement surface and vegetation in the joints need to be removed.]

a. Soil Sterilants. *Soil sterilants shall contain Bromacil or Prometone and shall be approved by the Engineer. Application rates shall be in accordance with the manufacturer's recommendations.*

b. Crack Preparation. *A high temperature compressed air lance shall be used at all times to blast out any vegetation, dirt, dampness and loose materials from the cracks. Existing crack sealant which is deteriorated shall be removed as directed by the Engineer. The high velocity hot air shall be not less than 2,000 °F in temperature. The air lance shall operate in a no flame impingement condition and shall have a directional controlled velocity of 330-fps minimum and a combustion temperature at ignition of no less than 2,000 °F. After cleaning of crack, tack coat shall be applied prior to the application of emulsified asphalt and aggregate. Tack coat shall conform to Item P-603 of these specifications.*

c. Filler Application. *After cracks have been cleaned, received soil sterilant and tack coat, and have been approved by the Engineer, the cracks shall be filled with the emulsified asphalt and aggregate described within this specification. The mix shall be raked in the crack by hand in order to completely fill the entire crack. Once the crack is filled, excess asphalt mix shall be rounded up along the length of the crack, and pinched into the crack using a small asphalt roller. The application and compaction method shall be approved by the Engineer prior to beginning crack cleaning operations.*

101-3.3 Removal of Foreign Substances/contaminates prior to [overlay] [seal-coat] [remarking]. Removal of foreign substances/contaminates from existing pavement that will affect the bond of the new treatment shall consist of removal of rubber, fuel spills, oil, crack sealer, at least 90% of paint, and other foreign substances from the surface of the pavement. Areas that require removal are designated on the plans and as directed by the RPR in the field during construction.

~~[Chemicals][high-pressure water][heater scarifier (asphaltic concrete only)][cold milling][rotary grinding][sandblasting] may be used. If chemicals are used, they shall comply with the state's environmental protection regulations. Removal methods used shall not cause major damage to the pavement, or to any structure or utility within or adjacent to the work area. Major damage is defined as changing the properties of the pavement, removal of asphalt causing the aggregate to ravel, or removing pavement over 1/8 inch deep. If it is deemed by the RPR that damage to the existing pavement is caused by operational error, such as permitting the application method to dwell in one location for too long, the Contractor shall repair the damaged area without compensation and as directed by the RPR.~~

~~Removal of foreign substances shall not proceed until approved by the RPR. Water used for high-pressure water equipment shall be provided by the Contractor at the Contractor's expense. No material shall be deposited on the pavement shoulders. All wastes shall be disposed of in areas indicated in this specification or shown on the plans.~~

~~**101-3.4 Concrete spall or failed asphaltic concrete pavement repair.**~~

~~**a. Repair of concrete spalls in areas to be overlaid with asphalt.** The Contractor shall repair all spalled concrete as shown on the plans or as directed by the RPR. The perimeter of the repair shall be saw cut a minimum of 2 inches outside the affected area and 2 inches deep. The deteriorated material shall be removed to a depth where the existing material is firm or cannot be easily removed with a geologist pick. The removed area shall be filled with asphalt mixture with aggregate sized appropriately for the depth of the patch. The material shall be compacted with equipment approved by the RPR until the material is dense and no movement or marks are visible. The material shall not be placed in lifts over 4 inches in depth. This method of repair applies only to pavement to be overlaid.~~

~~**b. Asphalt pavement repair.** The Contractor shall repair all spalled concrete as shown on the plans or as directed by the RPR. The failed areas shall be removed as specified in paragraph 101-3.1b. All failed material including surface, base course, subbase course, and subgrade shall be removed. Materials and methods of construction shall comply with the applicable sections of these specifications.~~

101-3.5 Cold milling. Milling shall be performed with a power-operated milling machine or grinder, capable of producing a uniform finished surface. The milling machine or grinder shall operate without tearing or gouging the underlaying surface. ~~The milling machine or grinder shall be equipped with grade and slope controls, and a positive means of dust control.~~ All millings shall be removed and disposed off Airport property. If the Contractor mills or grinds deeper or wider than the plans specify, the Contractor shall replace the material removed with new material at the Contractor's Expense.

~~**a. Patching.** The milling machine shall be capable of cutting a vertical edge without chipping or spalling the edges of the remaining pavement and it shall have a positive method of controlling the depth of cut. The RPR *Contractor* shall layout the area to be milled with a straightedge in increments of 1-foot widths. *The Contractor's layout shall be approved by the RPR prior to beginning milling operations.* The area to be milled shall cover only the failed area. Any excessive area that is milled because the Contractor doesn't have the appropriate milling machine, or areas that are damaged because of his negligence, shall be repaired by the Contractor at the Contractor's Expense.~~

~~**b. Profiling, grade correction, or surface correction.** The milling machine shall have a minimum width of [7] feet and it shall be equipped with electronic grade control devices that will cut the surface to the grade specified. The tolerances shall be maintained within +0 inch and -1/4 inch of the specified grade. The machine must cut vertical edges and have a positive method of dust control. The machine must have the ability to [windrow the millings or cuttings][remove the millings or cuttings from the pavement and load them into a truck]. All millings shall be removed and disposed of [off the airport][in areas designated on the plans].~~

c. Clean-up. The Contractor shall sweep the milled surface daily and immediately after the milling until all residual materials are removed from the pavement surface. Prior to paving, the Contractor shall wet down the milled pavement and thoroughly sweep and/or blow the surface to remove loose residual material. Waste materials shall be collected and removed from the pavement surface and adjacent areas by sweeping or vacuuming. Waste materials shall be removed and disposed off Airport property.

~~**101-3.6. Preparation of asphalt pavement surfaces prior to surface treatment.** Existing asphalt pavements to be treated with a surface treatment shall be prepared as follows:~~

~~**a.** Patch asphalt pavement surfaces that have been softened by petroleum derivatives or have failed due to any other cause. Remove damaged pavement to the full depth of the damage and replace with new asphalt pavement similar to that of the existing pavement in accordance with paragraph 101-3.4b.~~

~~**b.** Repair joints and cracks in accordance with paragraph 101-3.2.~~

~~**c.** Remove oil or grease that has not penetrated the asphalt pavement by scrubbing with a detergent and washing thoroughly with clean water. After cleaning, treat these areas with an oil spot primer. [ ]~~

~~**d.** Clean pavement surface immediately prior to placing the surface treatment so that it is free of dust, dirt, grease, vegetation, oil or any type of objectionable surface film.~~

101-3.7 Maintenance. The Contractor shall perform all maintenance work necessary to keep the pavement in a satisfactory condition until the full section is complete and accepted by the RPR. The surface shall be kept clean and free from foreign material. The pavement shall be properly drained at all times. If cleaning is necessary or if the pavement becomes disturbed, any work repairs necessary shall be performed at the Contractor's expense.

~~**101-3.8 Preparation of Joints in Rigid Pavement prior to resealing.** Prior to application of sealant material, clean and dry the joints of all scale, dirt, dust, old sealant, curing compound, moisture and other foreign matter. The Contractor shall demonstrate, in the presence of the RPR, that the method used cleans the joint and does not damage the joint.~~

~~**101-3.8.1 Removal of Existing Joint Sealant.** All existing joint sealants will be removed by plowing or use of hand tools. Any remaining sealant and or debris will be removed by use of wire brushes or other tools as necessary. Resaw joints removing no more than 1/16 inch from each joint face. Immediately after sawing, flush out joint with water and other tools as necessary to completely remove the slurry.~~

~~**101-3.8.2 Cleaning prior to sealing.** Immediately before sealing, joints shall be cleaned by removing any remaining laitance and other foreign material. Allow sufficient time to dry out joints prior to sealing. Joint surfaces will be surface-dry prior to installation of sealant.~~

~~**101-3.8.3 Joint sealant.** Joint material and installation will be in accordance with [Item P-605] [Item P-604].~~

~~**101-3.9 Preparation of Cracks in Flexible Pavement prior to sealing.** Prior to application of sealant material, clean and dry the joints of all scale, dirt, dust, old sealant, curing compound, moisture and other foreign matter. The Contractor shall demonstrate, in the presence of the RPR, the method used cleans the cracks and does not damage the pavement.~~

~~**101-3.9.1 Preparation of Crack.** Widen crack with [router] [random crack saw] by removing a minimum of 1/16 inch from each side of crack. Immediately before sealing, cracks will be blown out with a hot air lance combined with oil and water-free compressed air.~~

~~**101-3.9.2 Removal of Existing Crack Sealant.** Existing sealants will be removed by [routing] [random crack saw]. Following [routing] [sawing] any remaining debris will be removed by use of a hot lance combined with oil and water-free compressed air.~~

~~**101-3.9.3 Crack Sealant.** Crack sealant material and installation will be in accordance with [Item P-605].~~

101-3.10 Removal of Pipe and other Buried Structures.

a. **Removal of Existing Pipe Material.** Not used.

b. **Removal of Inlets/Manholes.** Not used.

METHOD OF MEASUREMENT

101-4.1 Pavement removal. The unit of measurement for pavement removal shall be the number of square yards removed by the Contractor. Any pavement removed outside the limits of removal because the pavement was damaged by negligence on the part of the Contractor shall not be included in the measurement for payment. No direct measurement or payment shall be made for saw cutting. Saw cutting shall be incidental to pavement removal. Dowel bar installation shall be incidental to pavement removal.

~~**101-4.2 Joint and crack repair.** The unit of measurement for joint and crack repair shall be the linear foot of joint.~~

~~**101-4.3 Removal of Foreign Substances/contaminates.** The unit of measurement for foreign Substances/contaminates removal shall be the square foot.~~

~~**101-4.4 Spalled and failed asphalt pavement repair.** The unit of measure for failed asphalt pavement repair shall be square foot.~~

~~**101-4.5 Concrete Spall Repair.** The unit of measure for concrete spall repair shall be the number of square feet. The location and average depth of the patch shall be determined and agreed upon by the RPR and the Contractor.~~

101-4.6 Cold milling. The unit of measure for cold milling shall be 2 inches of milling per square yard. The location and average depth of the cold milling shall be as shown on the plans. If the initial cut does not correct the condition, the Contractor shall re-mill the area and will be paid for the total depth of milling.

101-4.7 Removal of Pipe and other Buried Structures. Not required.

BASIS OF PAYMENT

101-5.1 Payment. Payment shall be made at contract unit price for the unit of measurement as specified above. This price shall be full compensation for furnishing all materials and for all preparation, hauling, and placing of the material and for all labor, equipment, tools, and incidentals necessary to complete this item.

Item P-101-5.1	Asphalt Pavement Removal - per square yard
Item P-101-5.2	Concrete Pavement Removal - per square yard
Item P-101-5.3	Pavement Markings Removal – per square foot
Item P-101-5.6	Cold Milling (2 inch) – per square yard

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

Advisory Circulars (AC)

AC 150/5380-6	Guidelines and Procedures for Maintenance of Airport Pavements.

ASTM International (ASTM)

ASTM D6690	Standard Specification for Joint and Crack Sealants, Hot Applied, for Concrete and Asphalt Pavements

END OF ITEM P-101

PAGE INTENTIONALLY LEFT BLANK

ITEM P-152 EXCAVATION, SUBGRADE, AND EMBANKMENT

DESCRIPTION

152-1.1 This item covers excavation, disposal, placement, and compaction of all materials within the limits of the work required to construct safety areas, runways, taxiways, aprons, and intermediate areas as well as other areas for drainage, building construction, parking, or other purposes in accordance with these specifications and in conformity to the dimensions and typical sections shown on the plans.

152-1.2 Classification. All material excavated shall be classified as defined below:

a. Unclassified excavation. Unclassified excavation shall consist of the excavation and disposal of all material, regardless of its nature which is not otherwise classified and paid for under one of the following items.

~~[**b. Rock excavation.** Rock excavation shall include all solid rock in ledges, in bedded deposits, in unstratified masses, and conglomerate deposits which are so firmly cemented they cannot be removed without blasting or using rippers. All boulders containing a volume of more than 1/2 cubic yard (0.4 m3) will be classified as "rock excavation."]~~

~~[**c. Muck excavation.** Muck excavation shall consist of the removal and disposal of deposits or mixtures of soils and organic matter not suitable for foundation material. Muck shall include materials that will decay or produce subsidence in the embankment. It may consist of decaying stumps, roots, logs, humus, or other material not satisfactory for incorporation in the embankment.]~~

~~[**d. Drainage excavation.** Drainage excavation shall consist of all excavation made for the primary purpose of drainage and includes drainage ditches, such as intercepting, inlet or outlet ditches; temporary levee construction; or any other type as shown on the plans.]~~

~~[**e. Borrow excavation.** Borrow excavation shall consist of approved material required for the construction of embankments or for other portions of the work in excess of the quantity of usable material available from required excavations. Borrow material shall be obtained from areas designated by the Resident Project Representative (RPR) within the limits of the airport property but outside the normal limits of necessary grading, or from areas outside the airport boundaries.]~~

152-1.3 Unsuitable excavation. Unsuitable material *may* ~~shall~~ be disposed *of on-site or other areas approved by the* RPR. ~~in designated waste areas as shown on the plans.~~ Materials containing vegetable or organic matter, such as muck, peat, organic silt, or sod shall be considered unsuitable for use in embankment construction. Material suitable for topsoil may be used on the embankment slope when approved by the RPR. *Undercutting of material unsatisfactory for subgrade foundation, roads, shoulders, or areas intended for turfing shall be considered unsuitable excavation and shall be excavated to the depth specified by the Engineer below the subgrade.*

CONSTRUCTION METHODS

152-2.1 General. Before beginning excavation, grading, and embankment operations in any area, the area shall be cleared or cleared and grubbed in accordance with Item P-151.

The suitability of material to be placed in embankments shall be subject to approval by the RPR. All unsuitable material shall be disposed of in waste areas *off-site, unless otherwise approved by the RPR* ~~as shown on the plans.~~ All waste areas shall be graded to allow positive drainage of the area and adjacent areas. The surface elevation of waste areas shall be specified on the plans or approved by the RPR.

When the Contractor's excavating operations encounter artifacts of historical or archaeological significance, the operations shall be temporarily discontinued and the RPR notified per Section 70, paragraph 70-20. At the direction of the RPR, the Contractor shall excavate the site in such a manner as to preserve the artifacts encountered and allow for their removal. Such excavation will be paid for as extra work.

Areas outside the limits of the pavement areas where the top layer of soil has become compacted by hauling or other Contractor activities shall be scarified and disked to a depth of 4 inches, to loosen and pulverize the soil. Stones or rock fragments larger than 4 inches in their greatest dimension will not be permitted in the top 6 inches of the subgrade.

If it is necessary to interrupt existing surface drainage, sewers or under-drainage, conduits, utilities, or similar underground structures, the Contractor shall be responsible for and shall take all necessary precautions to preserve them or provide temporary services. When such facilities are encountered, the Contractor shall notify the RPR, who shall arrange for their removal if necessary. The Contractor, at their own expense, shall satisfactorily repair or pay the cost of all damage to such facilities or structures that may result from any of the Contractor's operations during the period of the contract.

a. Blasting. Blasting shall not be allowed.

152-2.2 Excavation. No excavation shall be started until the work has been staked out by the Contractor and the RPR has obtained from the Contractor, the survey notes of the elevations and measurements of the ground surface. The Contractor and RPR shall agree that the original ground lines shown on the original topographic mapping are accurate, or agree to any adjustments made to the original ground lines.

Digital terrain model (DTM) files of the existing surfaces, finished surfaces and other various surfaces were used to develop the design plans.

Volumetric quantities were calculated using design cross sections which were created for this project using the DTM files of the applicable design surfaces and generating End Area Volume Reports. Paper copies of design cross sections and a paper copy of the original topographic map will be issued to the successful bidder.

Existing grades on the design cross sections or DTM's, where they do not match the locations of actual spot elevations shown on the topographic map, were developed by computer interpolation from those spot elevations. Prior to disturbing original grade, Contractor shall verify the accuracy of the existing ground surface by verifying spot elevations at the same locations where original field survey data was obtained as indicated on the topographic map. Contractor shall recognize that, due to the interpolation process, the actual ground surface at any particular location may differ somewhat from the interpolated surface shown on the design cross sections or obtained from the DTM's. Contractor's verification of original ground surface, however, shall be limited to verification of spot elevations as indicated herein, and no adjustments will be made to the original ground surface unless the Contractor demonstrates that spot elevations shown are incorrect. For this purpose, spot elevations which are within 0.1 foot of the stated elevations for ground surfaces, or within 0.04 foot for hard surfaces (pavements, buildings, foundations, structures, etc.) shall be considered "no change". Only deviations in excess of these will be considered for adjustment of the original ground surface. If Contractor's verification identifies discrepancies in the topographic map, Contractor shall notify the RPR in writing at least two weeks before disturbance of existing grade to allow sufficient time to verify the submitted information and make adjustments to the design cross sections or DTM's. Disturbance of existing grade in any area shall constitute acceptance by the Contractor of the accuracy of the original elevations shown on the topographic map for that area.

All areas to be excavated shall be stripped of vegetation and topsoil. Topsoil shall be stockpiled for future use in areas designated on the plans or by the RPR. All suitable excavated material shall be used in the formation of embankment, subgrade, or other purposes as shown on the plans. All unsuitable material shall be disposed of *as described in paragraph 152-1.3* ~~shown on the plans~~.

The grade shall be maintained so that the surface is well drained at all times.

When the volume of the excavation exceeds that required to construct the embankments to the grades as indicated on the plans, the excess shall be used to grade the areas of ultimate development or disposed as directed by the RPR. When the volume of excavation is not sufficient for constructing the embankments to the grades indicated, the deficiency shall be obtained from borrow areas.

a. Selective grading. When *the quality of material varies significantly* ~~selective grading is indicated on the plans~~, the more suitable material designated by the RPR shall be used in constructing the embankment

or in capping the pavement subgrade. If, at the time of excavation, it is not possible to place this material in its final location, it shall be stockpiled in approved areas until it can be placed. The more suitable material shall then be placed and compacted as specified. Selective grading shall be considered incidental to the work involved. The cost of stockpiling and placing the material shall be *subsidiary to "Unclassified Excavation."* ~~included in the various pay items of work involved.~~

b. Undercutting. Rock, shale, hardpan, loose rock, boulders, or other material unsatisfactory for safety areas, subgrades, roads, shoulders, or any areas intended for turf shall be excavated to a minimum depth of 12 inches below the subgrade or to the depth specified by the RPR. Muck, peat, matted roots, or other yielding material, unsatisfactory for subgrade foundation, shall be removed to the depth specified. Unsuitable materials shall be disposed off the airport. The cost is incidental to this item. This excavated material shall be paid for at the contract unit price per cubic yard for Unsuitable Excavation. The excavated area shall be backfilled with suitable material obtained from the grading operations or borrow areas and compacted to specified densities. The necessary backfill will constitute a *necessary part of Unsuitable Excavation* ~~part of the embankment~~. Where rock cuts are made, backfill with select material. Any pockets created in the rock surface shall be drained in accordance with the details shown on the plans. Undercutting will be paid as Unsuitable Excavation.

c. Over-break. Over-break, including slides, is that portion of any material displaced or loosened beyond the finished work as planned or authorized by the RPR. All over-break shall be graded or removed by the Contractor and disposed of as directed by the RPR. The RPR shall determine if the displacement of such material was unavoidable and their own decision shall be final. Payment will not be made for the removal and disposal of over-break that the RPR determines as avoidable. Unavoidable over-break will be classified as "Unclassified Excavation."

d. Removal of utilities. The removal of existing structures and utilities required to permit the orderly progress of work will be accomplished by the Contractor as indicated on the plans. All existing foundations shall be excavated at least 2 feet below the top of subgrade or as indicated on the plans, and the material disposed of as directed by the RPR. All foundations thus excavated shall be backfilled with suitable material and compacted as specified for embankment or as shown on the plans. *All work associated with the excavation, removal, backfill, disposal, and/or stockpiling of existing structures and culverts will not be measured for separate payment but will be considered subsidiary to "Unclassified Excavation".*

152-2.3 Borrow excavation. *Borrow material for fill may be obtained from excavation within the project grading limits.* Borrow excavation shall be made only at these designated locations and within the horizontal and vertical limits as staked or as directed by the RPR. All unsuitable material shall be disposed of by the Contractor as shown on the plans. All borrow pits shall be opened to expose the various strata of acceptable material to allow obtaining a uniform product. Borrow areas shall be drained and left in a neat, presentable condition with all slopes dressed uniformly. Borrow areas shall not create a hazardous wildlife attractant.

Imported material for fill or backfill under pavements shall be materials with a low swell potential (crushed rock or moisture conditioned low plasticity soil). Typical CBR values for this option may range from 5 (low plasticity soil) to 20 (Well graded crushed aggregate) depending on the type of selected replacement material. Another option includes over excavation and replace the upper 12" to 18" of pavement subgrade with fly ash/lime stabilized parent soil. Generally, 10 to 15 percent fly ash or 3 to 5 percent lime must be added to the parent soil to achieve the level of "stabilization" necessary to improve the support characteristics of a high plasticity clay. Typical CBR values for this type of treatment would be about 10.

~~**152-2.4 Drainage excavation.** Drainage excavation shall consist of excavating drainage ditches including intercepting, inlet, or outlet ditches; or other types as shown on the plans. The work shall be performed in sequence with the other construction. Ditches shall be constructed prior to starting adjacent excavation operations. All satisfactory material shall be placed in embankment fills; unsuitable material shall be placed in designated waste areas or as directed by the RPR. All necessary work shall be performed true to final line, elevation, and cross-section. The Contractor shall maintain ditches constructed on the project to the required cross-section and shall keep them free of debris or obstructions until the project is accepted.~~

152-2.5 Preparation of cut areas or areas where existing pavement has been removed. In those areas on which a subbase or base course is to be placed, *the subgrade shall pass a proof roll as described in*

section 152-2.9. ~~the top [12 inches] of subgrade shall be compacted to not less than [100 %] of maximum density for non-cohesive soils, and [95%] of maximum density for cohesive soils as determined by ASTM [ ]. As used in this specification, "non-cohesive" shall mean those soils having a plasticity index (PI) of less than 3 as determined by ASTM D4318.~~

152-2.6 Preparation of embankment area. All sod and vegetative matter shall be removed from the surface upon which the embankment is to be placed. The cleared surface shall be broken up by plowing or scarifying to a minimum depth of 6 inches and shall then be compacted per paragraph 152-2.10.

Sloped surfaces steeper than one (1) vertical to four (4) horizontal shall be plowed, stepped, benched, or broken up so that the fill material will bond with the existing material. When the subgrade is part fill and part excavation or natural ground, the excavated or natural ground portion shall be scarified to a depth of 12 inches and compacted as specified for the adjacent fill.

No direct payment shall be made for the work performed under this section. The necessary clearing and grubbing and the quantity of excavation removed will be paid for under the respective items of work.

152-2.7 Control Strip. The first half-day of construction of subgrade and/or embankment shall be considered as a control strip for the Contractor to demonstrate, in the presence of the RPR, that the materials, equipment, and construction processes meet the requirements of this specification. The sequence and manner of rolling necessary to obtain specified density requirements shall be determined. The maximum compacted thickness may be increased to a maximum of 12 inches upon the Contractor's demonstration that approved equipment and operations will uniformly compact the lift to the specified density. The RPR must witness this demonstration and approve the lift thickness prior to full production.

Control strips that do not meet specification requirements shall be reworked, re-compacted, or removed and replaced at the Contractor's expense. Full operations shall not begin until the control strip has been accepted by the RPR. The Contractor shall use the same equipment, materials, and construction methods for the remainder of construction, unless adjustments made by the Contractor are approved in advance by the RPR.

152-2.8 Formation of embankments. The material shall be constructed in lifts as established in the control strip, but not less than 6 inches nor more than 12 inches of compacted thickness.

When more than one lift is required to establish the layer thickness shown on the plans, the construction procedure described here shall apply to each lift. No lift shall be covered by subsequent lifts until tests verify that compaction requirements have been met. The Contractor shall rework, re-compact and retest any material placed which does not meet the specifications.

The lifts shall be placed, to produce a soil structure as shown on the typical cross-section or as directed by the RPR. Materials such as brush, hedge, roots, stumps, grass and other organic matter, shall not be incorporated or buried in the embankment.

Earthwork operations shall be suspended at any time when satisfactory results cannot be obtained due to rain, freezing, or other unsatisfactory weather conditions in the field. Frozen material shall not be placed in the embankment nor shall embankment be placed upon frozen material. Material shall not be placed on surfaces that are muddy, frozen, or contain frost. The Contractor shall drag, blade, or slope the embankment to provide surface drainage at all times.

The material in each lift shall be within ±2% of optimum moisture content *for low plasticity cohesive soils, and 0% to +4% for high plasticity cohesive soils* before rolling to obtain the prescribed compaction. The material shall be moistened or aerated as necessary to achieve a uniform moisture content throughout the lift. Natural drying may be accelerated by blending in dry material or manipulation alone to increase the rate of evaporation.

The Contractor shall make the necessary corrections and adjustments in methods, materials or moisture content to achieve the specified embankment density.

The RPR will take samples of excavated materials which will be used in embankment for testing and develop a Moisture-Density Relations of Soils Report (Proctor) in accordance with ASTM D698. A new Proctor shall be developed for each soil type based on visual classification.

Density tests will be taken by the RPR for every 3,000 square yards of compacted embankment for each lift which is required to be compacted, or other appropriate frequencies as determined by the RPR.

If the material has greater than 30% retained on the 3/4-inch (19.0 mm) sieve, follow AASHTO T-180 Annex Correction of maximum dry density and optimum moisture for oversized particles.

Rolling operations shall be continued until the embankment is compacted to not less than 100% of maximum density for non-cohesive soils, and 95% of maximum density for cohesive soils as determined by ASTM D698. Under all areas to be paved, the embankments shall be compacted to a depth of 6 inches and to a density of not less than 95 (%) percent of the maximum density as determined by ASTM D698. As used in this specification, "non-cohesive" shall mean those soils having a plasticity index (PI) of less than 3 as determined by ASTM D4318.

On all areas outside of the pavement areas, no compaction will be required on the top 4 inches which shall be prepared for a seedbed in accordance with Item T-901.

The in-place field density shall be determined in accordance with ASTM 6938 using Procedure A, the direct transmission method, and ASTM D6938 shall be used to determine the moisture content of the material. The machine shall be calibrated in accordance with ASTM D6938. The RPR shall perform all density tests. If the specified density is not attained, the area represented by the test or as designated by the RPR shall be reworked and/or re-compacted and additional random tests made. This procedure shall be followed until the specified density is reached.

Compaction areas shall be kept separate, and no lift shall be covered by another lift until the proper density is obtained.

During construction of the embankment, the Contractor shall route all construction equipment evenly over the entire width of the embankment as each lift is placed. Lift placement shall begin in the deepest portion of the embankment fill. As placement progresses, the lifts shall be constructed approximately parallel to the finished pavement grade line.

When rock, concrete pavement, asphalt pavement, and other embankment material are excavated at approximately the same time as the subgrade, the material shall be incorporated into the outer portion of the embankment and the subgrade material shall be incorporated under the future paved areas. Stones, fragmentary rock, and recycled pavement larger than 4 inches in their greatest dimensions will not be allowed in the top 12 inches of the subgrade. Rockfill shall be brought up in lifts as specified or as directed by the RPR and the finer material shall be used to fill the voids forming a dense, compact mass. Rock, cement concrete pavement, asphalt pavement, and other embankment material shall not be disposed of except at places and in the manner designated on the plans or by the RPR.

When the excavated material consists predominantly of rock fragments of such size that the material cannot be placed in lifts of the prescribed thickness without crushing, pulverizing or further breaking down the pieces, such material may be placed in the embankment as directed in lifts not exceeding 2 feet in thickness. Each lift shall be leveled and smoothed with suitable equipment by distribution of spalls and finer fragments of rock. The lift shall not be constructed above an elevation 4 feet below the finished subgrade.

There will be no separate measurement of payment for compacted embankment. All costs incidental to placing in lifts, compacting, discing, watering, mixing, sloping, and other operations necessary for construction of embankments will be included in the contract price for excavation, borrow, or other items.

152-2.9 Proof rolling. The purpose of proof rolling the subgrade is to identify any weak areas in the subgrade and not for compaction of the subgrade. Before start of embankment, the subgrade area shall be proof rolled with a 25 ton Tandem axle Dual Wheel Dump Truck loaded to the legal limit with tires inflated to 100/150 psi in the presence of the RPR. Apply a minimum of 25% coverage, or as specified by the RPR, under pavement areas. A coverage is defined as the application of one tire print over the designated area.

Soft areas of subgrade that deflect more than 1 inch or show permanent deformation greater than 1 inch shall be removed and replaced with suitable material or reworked to conform to the moisture content and compaction requirements in accordance with these specifications. Removal and replacement of soft areas is incidental to this item.

152-2.10 Compaction requirements. The subgrade under areas to be paved shall be compacted to a depth of 6 inches and to a density of not less than 95 percent of the maximum dry density as determined by ASTM D698. The subgrade in areas outside the limits of the pavement areas shall be compacted to a depth of 6 inches and to a density of not less than 95 percent of the maximum density as determined by ASTM D698.

The material to be compacted shall be within ±2% of optimum moisture content before being rolled to obtain the prescribed compaction (except for expansive soils). When the material has greater than 30 percent retained on the ¾ inch (19.0 mm) sieve, follow the methods in ASTM D698. Tests for moisture content and compaction will be taken at a minimum of 3,000 S.Y. of subgrade per *lift*. All quality assurance testing shall be done by the RPR.

The in-place field density shall be determined in accordance with ASTM D6938 using Procedure A, the direct transmission method, and ASTM D6938 shall be used to determine the moisture content of the material. The machine shall be calibrated in accordance with ASTM D6938 within 12 months prior to its use on this contract. The gage shall be field standardized daily.

Maximum density refers to maximum dry density at optimum moisture content unless otherwise specified.

If the specified density is not attained, the entire lot shall be reworked and/or re-compacted and additional random tests made. This procedure shall be followed until the specified density is reached.

All cut-and-fill slopes shall be uniformly dressed to the slope, cross-section, and alignment shown on the plans or as directed by the RPR and the finished subgrade shall be maintained.

152-2.11 Finishing and protection of subgrade. Finishing and protection of the subgrade is incidental to this item. Grading and compacting of the subgrade shall be performed so that it will drain readily. All low areas, holes or depressions in the subgrade shall be brought to grade. Scarifying, blading, rolling and other methods shall be performed to provide a thoroughly compacted subgrade shaped to the lines and grades shown on the plans. All ruts or rough places that develop in the completed subgrade shall be graded, re-compacted, and retested. The Contractor shall protect the subgrade from damage and limit hauling over the finished subgrade to only traffic essential for construction purposes.

The Contractor shall maintain the completed course in satisfactory condition throughout placement of subsequent layers. No subbase, base, or surface course shall be placed on the subgrade until the subgrade has been accepted by the RPR.

152-2.12 Haul. All hauling will be considered a necessary and incidental part of the work. The Contractor shall include the cost in the contract unit price for the pay of items of work involved. No payment will be made separately or directly for hauling on any part of the work.

The Contractor's equipment shall not cause damage to any excavated surface, compacted lift or to the subgrade as a result of hauling operations. Any damage caused as a result of the Contractor's hauling operations shall be repaired at the Contractor's expense.

The Contractor shall be responsible for providing, maintaining and removing any haul roads or routes within or outside of the work area, and shall return the affected areas to their former condition, unless otherwise authorized in writing by the Owner. No separate payment will be made for any work or materials associated with providing, maintaining and removing haul roads or routes.

152-2.13 Surface Tolerances. In those areas on which a subbase or base course is to be placed, the surface shall be tested for smoothness and accuracy of grade and crown. Any portion lacking the required smoothness or failing in accuracy of grade or crown shall be scarified to a depth of at least 3 inches, reshaped and re-compacted to grade until the required smoothness and accuracy are obtained and approved by the RPR. The Contractor shall perform all final smoothness and grade checks in the presence

of the RPR. Any deviation in surface tolerances shall be corrected by the Contractor at the Contractor's expense.

a. **Smoothness.** The finished surface shall not vary more than +/- ½ inch when tested with a 12-foot straightedge applied parallel with and at right angles to the centerline. The straightedge shall be moved continuously forward at half the length of the 12-footstraightedge for the full length of each line on a 50-foot grid.

b. **Grade.** The grade and crown shall be measured on a 50-foot grid and shall be within +/-0.05 feet of the specified grade.

On safety areas, turfed areas and other designated areas within the grading limits where no subbase or base is to placed, grade shall not vary more than 0.10 feet from specified grade. Any deviation in excess of this amount shall be corrected by loosening, adding or removing materials, and reshaping.

152-2.14 Topsoil. When topsoil is specified or required as shown on the plans or under Item T-905, it shall be salvaged from stripping or other grading operations. The topsoil shall meet the requirements of Item T-905. If, at the time of excavation or stripping, the topsoil cannot be placed in its final section of finished construction, the material shall be stockpiled at approved locations. Stockpiles shall be located as shown on the plans and the approved CSPP, and shall not be placed on areas that subsequently will require any excavation or embankment fill. If, in the judgment of the RPR, it is practical to place the salvaged topsoil at the time of excavation or stripping, the material shall be placed in its final position without stockpiling or further re-handling.

Upon completion of grading operations, stockpiled topsoil shall be handled and placed as shown on the plans and as required in Item T-905. Topsoil shall be paid for as provided in Item T-905. No direct payment will be made for topsoil under Item P-152.

METHOD OF MEASUREMENT

152-3.1 Measurement for payment specified by the cubic yard shall be computed by the average end areas of design cross sections for computation of neat line design quantities. The end area is that bound by the original ground line established by *the design survey* ~~field cross-sections~~ and the final theoretical pay line established by cross-sections shown on the plans, subject to verification by the RPR.

In cut sections, the additional cut required to construct the topsoil layer to the plan grade has not been measured and will not be measured for separate payment but will be subsidiary to "Unclassified Excavation". In fill sections, the additional fill required to replace the stripped material has not been measured and will not be measured for payment but will be subsidiary to "Unclassified Excavation".

No allowance has been made in the measurement for shrink/swell. The Contractor shall make his own determination as to the amount of shrink/swell involved in the construction of the embankment.

The Contractor shall make his/her own determination as to the suitability of the excavated material to be placed in embankments and the resulting additional off-site material required for the construction of the embankment. Additional off-site material required for the formation of embankment shall not be measured for separate payment but shall be considered subsidiary to "Unclassified Excavation".

Measurement of unclassified excavation shall be based on ***plan quantities****. These quantities are believed to be correct and shall be utilized for final payment not withstanding any adjustments to the project by written direction of the Engineer. Should the contractor find discrepancies and/or errors, he/she shall bring the discrepancy and/or error to the attention of the Engineer immediately and corrections shall be made to the quantity of excavation to be paid for by change order. It is expressly understood by the contractor that upon disturbance of the existing ground and no notification to the Engineer of possible errors, that the contractor accepts as final payment the quantities of excavation as detailed on the plans and laid out in the proposal.*

No adjustment has been made to the plan quantities for the construction or demolition of existing drainage structures. The Contractor shall make his/her own determination as to the amount of unsuitable excavated material which may be encountered and the resulting additional borrow material required for the

construction of the embankment. There will be no adjustment for additional embankment required to construct the project if the excavated material is deemed unsuitable.

~~**152-3.2** The quantity of embankment in place shall be the number of cubic yards measured in its final position.~~

~~**152-3.3** Stockpiled material shall not be measured for payment in the stockpiled position.~~

152-3.4 *Unsuitable excavation shall be measured from the surface of the ground, after stripping has been accomplished, or from the bottom of the planned excavation, to the depth of the excavation as directed by the Engineer. Measurements will be taken by the Engineer, and the volume of excavation will be calculated by the average end area method. The necessary refilling of unsuitable areas will not be measured for separate payment but will be subsidiary to "Unsuitable Excavation". Only that amount of excavation directed by the Engineer will be measured for payment.*

BASIS OF PAYMENT

152-4.1 Unclassified excavation payment shall be made at the contract unit price per cubic yard. This price shall be full compensation for furnishing all materials, labor, equipment, tools, and incidentals necessary to complete the item.

152-4.2 *Unsuitable excavation shall be paid for at the contract unit price bid per cubic yard for "Unsuitable Excavation", which price shall be full compensation for all excavation; for disposal or placement of unsuitable material (in accordance with section 152-1.3), including loading, hauling, spreading, and compaction; for compaction and preparation of subgrade; for the refilling, rolling, and compaction of all undercut areas; and for all equipment, tools, labor, and incidentals necessary to complete the work.*

Payment will be made under:

Item P-152-4.1	Unclassified Excavation - per cubic yard
Item P-152-4.2	Unsuitable Excavation—per cubic yard

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

American Association of State Highway and Transportation Officials (AASHTO)

AASHTO T-180	Standard Method of Test for Moisture-Density Relations of Soils Using a 4.54-kg (10-lb) Rammer and a 457-mm (18-in.) Drop

ASTM International (ASTM)

ASTM D698	Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft-lbf/ft^3 (600 kN-m/m^3))
ASTM D1556	Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method
ASTM D1557	Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft^3 (2700 kN-m/m^3))
ASTM D6938	Standard Test Methods for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth)

Advisory Circulars (AC)

AC 150/5370-2	Operational Safety on Airports During Construction Software

Software

FAARFIELD – FAA Rigid and Flexible Iterative Elastic Layered Design

U.S. Department of Transportation

FAA RD-76-66 Design and Construction of Airport Pavements on Expansive Soils

END OF ITEM P-152

PAGE INTENTIONALLY LEFT BLANK

ITEM P-158 FLY ASH TREATED SUBGRADE

DESCRIPTION

158-1.1 This item shall consist of constructing one or more courses of a mixture of soil, fly ash, and water in accordance with this specification, and in conformity with the lines, grades, thicknesses, and typical cross-sections shown on the plans.

MATERIALS

158-2.1 Fly ash. Fly ash shall meet ASTM C618, Class C and contain a minimum of 25% CaO. Sample and test the fly ash in accordance with ASTM C311. The source of the fly ash shall be identified by the Contractor and approved by the Resident Project Representative (RPR) in advance of modification operations so laboratory tests can be completed prior to beginning work.

Fly ash shall be handled and stored in closed weatherproof containers until immediately before distribution. Fly ash exposed to moisture prior to mixing with soils shall be discarded.

158-2.2 Water. Water used in mixing or curing shall be from potable water sources. Other sources shall be tested in accordance with ASTM C1602 prior to use.

158-2.3 Soil. The soil shall consist of on-site materials and shall be free of roots, sod, weeds, and stones larger than 2-1/2 inches with a sulfate content of less than 0.3%.

COMPOSITION

158-3.1 Fly ash. Fly ash shall be applied at 12 percent dry weight, at a depth of 12 inches of subgrade treatment.

158-3.2 Tolerances. At final compaction, the fly ash and water content for each course of subgrade treatment shall conform to the following tolerances:

TOLERANCES

Material	Target	Tolerance	Specifications
Fly ash	12 %	0 to + 2%	% Total Dry Materials
Moisture Content	Optimum	0 to +2%	ASTM D558

WEATHER LIMITATIONS

158-4.1 Weather limitation. Do not construct subgrade when weather conditions detrimentally affect the quality of the materials. Do not apply fly ash unless the air temperature is at least 40°F and rising. Do not apply fly ash to soils that are frozen or contain frost. If the air temperature falls below 35°F, protect completed fly ash-treated areas by approved methods against the detrimental effects of freezing.

EQUIPMENT

158-5.1 Equipment. All equipment necessary to grade, scarify, spread, mix and compact the material shall be provided. The RPR must approve the Contractor's proposed equipment prior to the start of the treatment.

CONSTRUCTION METHODS

158-6.1 General. This specification is to construct a complete subgrade with a uniform fly ash/soil mixture which shall be free from loose or segregated areas. The subgrade shall be of uniform density and moisture content uniformly mixed for its full depth, and have with a smooth surface suitable for placing subsequent courses. The Contractor shall be responsible to meet these requirements.

Prior to any treatment, the subgrade shall be constructed as specified in Item P-152, Excavation, Subgrade and Embankment, and shaped to conform to the typical sections, lines, and grades as shown on the plans.

The machine must give visible indication at all times that it is cutting, pulverizing and mixing the material uniformly to the proper depth over the full width of the cut.

158-6.2 Application. Fly ash shall be uniformly spread only over an area where the initial mixing and compaction operations can be completed within the same workday. Fly ash shall not be applied when wind conditions are detrimental to proper application. A motor grader shall not be used to spread the fly ash. Adequate moisture shall be added to the fly ash/soil mixture to maintain the proper moisture content. Materials shall be handled, stored, and applied in accordance with all federal, state, and local requirements.

158-6.3 Mixing. The full depth of the treated subgrade shall be mixed with equipment as approved by the RPR. Fly ash shall not be left exposed for more than one (1) hour after distribution. Mixing and pulverization shall continue until the mixture contains no clods greater than 1-1/2 inches in size. Final moisture content of the mix shall be determined by the Contractor immediately prior to compaction in accordance with ASTM D2216 or ASTM D4959. Not more than 60 minutes shall elapse between start of moist mixing and start of compaction of the treated layer.

158-6.4 Control Strip. The first half-day of construction shall be considered the control strip. The Contractor shall demonstrate, in the presence of the RPR, that the materials, equipment, and construction processes meet the requirements of the specification. The sequence and manner of rolling necessary to obtain specified density requirements shall be determined. Control strips that do not meet specification requirements shall be reworked, re-compacted, or removed and replaced at the Contractor's expense. Full operations shall not continue until the control strip has been accepted by the RPR. Upon acceptance of the control strip by the RPR, the Contractor shall use the same equipment, materials, and construction methods for the remainder of construction, unless adjustments made by the Contractor are approved in advance by the RPR.

158-6.5 Treatment Application and Depth Checks. The amount of fly ash applied shall be monitored by the Contractor to assure that no less than the amount of fly ash specified in paragraph 158-3.1 is applied. The depth of modification shall be measured by the Contractor no less than 2 tests per day of material placed; test shall be witnessed by the RPR. Measurements shall be made in test holes excavated to show the full depth of mixing.

158-6.6 Compaction. The moisture content shall be at the moisture content as specified in paragraph 158-3.2 during compaction. The field density of the compacted mixture shall be at least 95% of the maximum density as specified in paragraph 158-6.10. Compaction of the fly ash mixture shall begin within 30 minutes after mixing the fly ash into the subgrade. All compaction operations shall be completed within 2 hours from the start of mixing. Perform in-place density test to determine degree of compaction. If the material fails to meet the density requirements, compaction shall continue or the material shall be removed and replaced. Maximum density refers to maximum dry density at optimum moisture content unless otherwise specified.

158-6.7 Finishing and curing. After the final lift or course of treated subgrade has been compacted, it shall be brought to the required lines and grades in accordance with the typical sections.

Finished portions of treated subgrade shall be protected to prevent equipment from marring, permanently deforming, or damaging completed work.

Sufficient protection from freezing shall be provided for at least 7 days after its construction or as approved by the RPR.

158-6.8 Maintenance. The Contractor shall maintain the fly ash treated subgrade in good condition until all the work has been completed, cured, and accepted by the RPR. When material has been exposed to excessive rain, snow, or freeze-thaw conditions, prior to placement of additional material, the Contractor shall verify that materials still meets all specification requirements. The cost is incidental to this item.

158-6.9 Surface tolerance. In those areas on which a subbase or base course is to be placed, the surface shall be tested for smoothness and accuracy of grade and crown. Any portion lacking the required smoothness or failing in accuracy of grade or crown shall be scarified to a depth of at least 3 inches, reshaped and re-compacted to grade until the required smoothness and accuracy are obtained and approved by the RPR. The Contractor shall perform all final smoothness and grade checks in the presence

of the RPR. Any deviation in surface tolerances shall be corrected by the Contractor at the Contractor's expense.

a. Smoothness. The finished surface shall not vary more than +/- ½ inch when tested with a 12-foot straightedge applied parallel with and at right angles to the centerline. The straightedge shall be moved continuously forward at half the length of the 12-foot straightedge for the full length of each line on a 50-foot grid.

b. Grade. The grade and crown shall be measured on a 50-foot grid and shall be within +/-0.05 feet of the specified grade.

158-6.10 Acceptance sampling and testing. Subgrade shall be accepted for density and thickness on an area basis. Testing frequency shall be a minimum of one (1) compaction and thickness test per 1000 square yards of stabilized subgrade, but not less than four (4) tests per day of production. Sampling locations will be determined on a random basis per ASTM D3665.

a. Density. The RPR shall perform all density tests.

The field density of the compacted mixture shall be at least 95% of the maximum density as determined by ASTM D558. Each area shall be accepted for density when the field density is at least 95% of the maximum density of laboratory specimens compacted and tested per ASTM D698. The in-place field density shall be determined per ASTM D6938 using Procedure A, the direct transmission method, and ASTM D6938 shall be used to determine the moisture content of the material. The machine shall be calibrated in accordance with ASTM D6938. If the specified density is not attained, the area represented by the failed test must be reworked and/or recompacted and two additional random tests made. This procedure shall be followed until the specified density is reached. Maximum density refers to maximum dry density at optimum moisture content unless otherwise specified.

b. Thickness. The thickness of the base course shall be within +0 and -1/2 inch of the specified thickness as determined by depth tests taken by the Contractor in the presence of the RPR for each area. Where the thickness is deficient by more than 1/2-inch, the Contractor shall correct such areas at no additional cost by scarifying to a depth of at least 3 inches, adding new material of proper gradation, and the material shall be blended and recompacted to grade. The Contractor shall replace, at his expense, base material where depth tests have been taken.

METHOD OF MEASUREMENT

158-7.1 Fly ash treated subgrade shall be paid for by the number of square yards completed and accepted.

Fly ash shall be paid for by the number of tons of fly ash to achieve the application rate specified in paragraph 158-3.1.

BASIS OF PAYMENT

158-8.1 Payment shall be made at the contract unit price per square yard for the fly ash treated subgrade at the specified thickness. The price shall be full compensation for furnishing all material, except the fly ash, and for all preparation, delivering, placing and mixing these materials, and all labor, equipment, tools and incidentals necessary to complete this item.

Payment shall be made at the contract unit price per ton of fly ash. This price shall be full compensation for furnishing this material; for all delivery, placing and incorporation of this material; and for all labor, equipment, tools, and incidentals necessary to complete this item.

Payment will be made under:

Item P-158-8.1	Fly ash treated subgrade - per square yard
Item P-158-8.2	Fly ash - per ton

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM International (ASTM)

ASTM C311	Standard Test Methods for Sampling and Testing Fly Ash or Natural Pozzolans for Use in Portland-Cement Concrete
ASTM C618	Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete
ASTM C1602	Standard Specification for Mixing Water Used in the Production of Hydraulic Cement Concrete
ASTM D698	Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft-lbf/ft^3 (600 kN-m/m^3))
ASTM D1556	Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method
ASTM D1557	Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft^3 (2,700 kN-m/m^3))
ASTM D2487	Standard Practice for Classification of Soils for Engineering Purposes (Unified Soil Classification System)
ASTM D4959	Standard Test Method for Determination of Water Content of Soil by Direct Heating
ASTM D6938	Standard Test Method for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth)

END OF ITEM P-158

ITEM P-208 AGGREGATE BASE COURSE

DESCRIPTION

208-1.1 This item shall consist of a base course composed of course aggregate bonded with fine aggregate base. It shall be constructed on a prepared subgrade or subbase course per these specifications and shall conform to the dimensions and typical cross-section shown on the plans.

MATERIALS

208-2.1 Aggregate base. The aggregate base material shall consist of both fine and coarse aggregate. Material shall be clean, sound, durable particles and fragments of stone or gravel, crushed stone, or crushed gravel mixed or blended with sand, screenings, or other materials. Materials shall be handled and stored in accordance with all federal, state, and local requirements. The aggregate shall be free from clay lumps, organic matter, or other deleterious materials or coatings. The method used to produce the crushed gravel shall result in the fractured particles in the finished product as nearly constant and uniform as practicable. The fine aggregate portion, defined as the portion passing the No. 4 (4.75 mm) sieve produced in crushing operations, shall be incorporated in the base material to the extent permitted by the gradation requirements. Aggregate base material requirements are listed in the following table.

AGGREGATE BASE MATERIAL REQUIREMENTS

Material Test	Requirement	Standard
Coarse Aggregate		
Resistance to Degradation	Loss: 50% maximum	ASTM C131
Soundness of Aggregates by Use of Sodium Sulfate **or** Magnesium Sulfate	Loss after 5 cycles: 12% maximum using Sodium sulfate - or - 18% maximum using magnesium sulfate	ASTM C88
Percentage of Fractured Particles	Minimum 60% by weight of particles with at least two fractured faces and 75% with at least one fractured face[1]	ASTM D5821
Flat Particles, Elongated Particles, or Flat and Elongated Particles	10% maximum, by weight, of flat, elongated, or flat and elongated particles [2]	ASTM D4791
Clay lumps and friable particles	Less than or equal to 3 percent	ASTM C142
Fine Aggregate		
Liquid limit	Less than or equal to 25	ASTM D4318
Plasticity Index	Not more than five (5)	ASTM D4318

[1] The area of each face shall be equal to at least 75% of the smallest mid-sectional area of the piece. When two fractured faces are contiguous, the angle between the planes of fractures shall be at least 30 degrees to count as two fractured faces.

[2] A flat particle is one having a ratio of width to thickness greater than five (5); an elongated particle is one having a ratio of length to width greater than five (5).

MoDOT Aggregate Base Alternate Material Requirements. *As an alternate to the material requirements in the table above, MoDOT approved material may be used. The ledge stone from which the* ***aggregate base will be produced has to have source approval from the Missouri Department of Transportation (MoDOT). Prior to use of materials, the contractor shall submit the current MoDOT source approval letter to the Engineer for the materials proposed for use during construction. Source approval granted for "all types of highway construction" (Product***

Code 1005CACP) constitutes approval for all uses. Source approval granted for "all types except PCCP" (Product Code 1005CACM) comprises approval for all uses except Portland cement concrete pavement. Source approval obtained for "all types except PCCP & PCCM" (Product Code 1002CAAC) is considered to be approval for all uses except Portland cement concrete.

208-2.2 Gradation requirements. The gradation of the aggregate base material shall meet the requirements of the gradation given in the following table when tested per ASTM C117 and ASTM C136. The gradation shall be well graded from coarse to fine and shall not vary from the lower limit on one sieve to the high limit on an adjacent sieve or vice versa. *Gradation requirements below also apply to MoDOT approved aggregate base material.*

Gradation of Aggregate Base

Sieve Size	Design Range Percentage by Weight passing	Contractor's Final Gradation	Job Control Grading Band Tolerances for Contractor's Final Gradation[1] Percent
2 inch (50 mm)	--		±0
1-1/2 inch (37.5 mm)	100		±5
1 inch (25.0 mm)	70-100		±8
3/4 inch (19.0 mm)	55-85		±8
No. 4 (4.75 mm)	30-60		±8
No. 40 (425 µm)	10-30		±5
No. 200 (75 µm)	0-5		±3

1 The "Job Control Grading Band Tolerances for Contractor's Final Gradation" in the table shall be applied to "Contractor's Final Gradation" to establish a job control grading band. The full tolerance still applies if application of the tolerances results in a job control grading band outside the design range.

208-2.3 Sampling and testing.

a. Aggregate base materials. The Contractor shall take samples of the aggregate base in accordance with ASTM D75 to verify initial aggregate base requirements and gradation. Material shall meet the requirements in paragraphs 208-2.1 and 208-2.2. This sampling and testing will be the basis for approval of the aggregate base quality requirements.

b. Gradation requirements. The Contractor shall take at least two aggregate base samples per day in the presence of the Resident Project Representative (RPR) to check the final gradation. Sampling shall be per ASTM D75. Material shall meet the requirements in paragraph 208-2.2. The samples shall be taken from the in-place, un-compacted material at sampling points and intervals designated by the RPR.

208-2.4 Separation Geotextile. Not used.

CONSTRUCTION METHODS

208-3.1 Control strip. The first half-day of construction shall be considered the control strip. The Contractor shall demonstrate, in the presence of the RPR, that the materials, equipment, and construction processes meet the requirements of the specification. The sequence and manner of rolling necessary to obtain specified density requirements shall be determined. The maximum compacted thickness may be increased to a maximum of 12 inches upon the Contractor's demonstration that approved equipment and operations will uniformly compact the lift to the specified density. The RPR must witness this demonstration and approve the lift thickness prior to full production.

Control strips that do not meet specification requirements shall be reworked, re-compacted or removed and replaced at the Contractor's expense. Full operations shall not continue until the control strip has been accepted by the RPR. The Contractor shall use the same equipment, materials, and construction methods for the remainder of construction, unless adjustments made by the Contractor are approved by the RPR.

208-3.2 Preparing underlying subgrade and/or subbase. The underlying subgrade and/or subbase shall be checked and accepted by the RPR before base course placing and spreading operations begin. Re-proof rolling of the subgrade or proof rolling of the subbase in accordance with Item P-152, at the Contractor's expense, may be required by the RPR if the Contractor fails to ensure proper drainage or protect the subgrade and/or subbase. Any ruts or soft, yielding areas due to improper drainage conditions, hauling, or any other cause, shall be corrected before the base course is placed. To ensure proper drainage, the spreading of the base shall begin along the centerline of the pavement on a crowned section or on the high side of the pavement with a one-way slope.

208-3.3 Production. The aggregate shall be uniformly blended and, when at a satisfactory moisture content per paragraph 208-3.5, the approved material may be transported directly to the placement.

208-3.4 Placement. The aggregate shall be placed and spread on the prepared underlying layer by spreader boxes or other devices as approved by the RPR, to a uniform thickness and width. The equipment shall have positive thickness controls to minimize the need for additional manipulation of the material. Dumping from vehicles that require re-handling shall not be permitted. Hauling over the uncompacted base course shall not be permitted.

The aggregate shall meet gradation and moisture requirements prior to compaction. The base course layer shall be constructed in lifts as established in the control strip, but not less than 4 inches nor more than 12 inches of compacted thickness.

When more than one lift is required to establish the layer thickness shown on the plans, the construction procedure described here shall apply to each lift. No lift shall be covered by subsequent lifts until tests verify that compaction requirements have been met. The Contractor shall rework, re-compact and retest any material placed which does not meet the specifications at the Contractor's expense.

208-3.5 Compaction. Immediately upon completion of the spreading operations, compact each layer of the base course, as specified, with approved compaction equipment. The number, type, and weight of rollers shall be sufficient to compact the material to the required density within the same day that the aggregate is placed on the subgrade.

The field density of each compacted lift of material shall be at least 100% of the maximum density of laboratory specimens prepared from samples of the base material delivered to the jobsite. The laboratory specimens shall be compacted and tested in accordance with ASTM D698. The moisture content of the material during placing operations shall be within ±2 percentage points of the optimum moisture content as determined by ASTM D698. Maximum density refers to maximum dry density at optimum moisture content unless otherwise specified.

208-3.6 Weather limitations. Material shall not be placed unless the ambient air temperature is at least 40°F and rising. Work on base course shall not be conducted when the subgrade or subbase is wet or frozen or the base material contains frozen material.

208-3.7 Maintenance. The base course shall be maintained in a condition that will meet all specification requirements. When material has been exposed to excessive rain, snow, or freeze-thaw conditions, prior to placement of additional material, the Contractor shall verify that materials still meet all specification requirements. Equipment may be routed over completed sections of base course, provided that no damage results and the equipment is routed over the full width of the completed base course. Any damage resulting to the base course from routing equipment over the base course shall be repaired by the Contractor at their expense.

208-3.8 Surface tolerances. After the course has been compacted, the surface shall be tested for smoothness and accuracy of grade and crown. Any portion lacking the required smoothness or failing in accuracy of grade or crown shall be scarified to a depth of at least 3 inches, reshaped and recompacted to

grade until the required smoothness and accuracy are obtained and approved by the RPR. Any deviation in surface tolerances shall be corrected by the Contractor at the Contractor's expense. The smoothness and accuracy requirements specified here apply only to the top layer when base course is constructed in more than one layer.

a. Smoothness. The finished surface shall not vary more than 3/8-inch when tested with a 12-foot straightedge applied parallel with and at right angles to the centerline. The straightedge shall be moved continuously forward at half the length of the 12-foot straightedge for the full length of each line on a 50-foot grid.

b. Grade. The grade and crown shall be measured on a 50-foot grid and shall be within +0 and -1/2 inch of the specified grade.

208-3.9 Acceptance sampling and testing. Aggregate base course shall be accepted for density and thickness on an area basis. Two tests will be made for density and thickness for each 1200 square yards. Sampling locations will be determined on a random basis per ASTM D3665.

a. **Density.** The RPR shall perform all density tests.

Each area shall be accepted for density when the field density is at least 100% of the maximum density of laboratory specimens compacted and tested per ASTM D698. The in-place field density shall be determined per ASTM D6938 using Procedure A, the direct transmission method, and ASTM D6938 shall be used to determine the moisture content of the material. The machine shall be calibrated in accordance with ASTM D6938. If the specified density is not attained, the area represented by the failed test must be reworked and/or recompacted and two additional random tests made. This procedure shall be followed until the specified density is reached. Maximum density refers to maximum dry density at optimum moisture content unless otherwise specified.

b. Thickness. Depth tests shall be made by test holes at least 3 inches in diameter that extend through the base. The thickness of the base course shall be within +0 and -1/2 inch of the specified thickness as determined by depth tests taken by the Contractor in the presence of the RPR for each area. Where the thickness is deficient by more than 1/2-inch, the Contractor shall correct such areas at no additional cost by scarifying to a depth of at least 3 inches, adding new material of proper gradation, and the material shall be blended and recompacted to grade. The Contractor shall replace, at his expense, base material where depth tests have been taken. *Thickness may be determined by survey or other methods approved by the RPR.*

METHOD OF MEASUREMENT

208-4.1 The quantity of aggregate base course shall be measured by the number of square yards of material actually constructed and accepted by the RPR as complying with the plans and specifications. Base materials shall not be included in any other excavation quantities.

BASIS OF PAYMENT

208-5.1 Payment shall be made at the contract unit price per square yards for aggregate base course *at the specified thickness.* This price shall be full compensation for furnishing all materials and for all operations, hauling, placing, and compacting of these materials, and for all labor, equipment, tools, and incidentals necessary to complete the item.

Payment will be made under:

Item P-208-5.1	Aggregate Base Course (4 in) - per square yard
Item P-208-5.2	Aggregate Base Course (Varying Depth) - per square yard

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM International (ASTM)

ASTM C29	Standard Test Method for Bulk Density ("Unit Weight") and Voids in Aggregate
ASTM C88	Standard Test Method for Soundness of Aggregates by Use of Sodium Sulfate or Magnesium Sulfate
ASTM C117	Standard Test Method for Materials Finer than 75-µm (No. 200) Sieve in Mineral Aggregates by Washing
ASTM C131	Standard Test Method for Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
ASTM C136	Standard Test Method for Sieve or Screen Analysis of Fine and Coarse Aggregates
ASTM C142	Standard Test Method for Clay Lumps and Friable Particles in Aggregates
ASTM D75	Standard Practice for Sampling Aggregates
ASTM D698	Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Standard Effort (12,400 ft-lbf/ft^3 (600 kN-m/m^3))
ASTM D1556	Standard Test Method for Density and Unit Weight of Soil in Place by the Sand-Cone Method
ASTM D1557	Standard Test Methods for Laboratory Compaction Characteristics of Soil Using Modified Effort (56,000 ft-lbf/ft^3 (2700 kN-m/m^3))
ASTM D2167	Standard Test Method for Density and Unit Weight of Soil in Place by the Rubber Balloon Method
ASTM D2487	Standard Practice for Classification of Soils for Engineering Purposes (Unified Soil Classification System)
ASTM D3665	Standard Practice for Random Sampling of Construction Materials
ASTM D4318	Standard Test Methods for Liquid Limit, Plastic Limit, and Plasticity Index of Soils
ASTM D4491	Standard Test Methods for Water Permeability of Geotextiles by Permittivity
ASTM D4643	Standard Test Method for Determination of Water Content of Soil and Rock by Microwave Oven Heating
ASTM D4751	Standard Test Methods for Determining Apparent Opening Size of a Geotextile
ASTM D4791	Standard Test Method for Flat Particles, Elongated Particles, or Flat and Elongated Particles in Coarse Aggregate
ASTM D5821	Standard Test Method for Determining the Percentage of Fractured Particles in Coarse Aggregate
ASTM D6938	Standard Test Method for In-Place Density and Water Content of Soil and Soil-Aggregate by Nuclear Methods (Shallow Depth)
ASTM D7928	Standard Test Method for Particle-Size Distribution (Gradation) of Fine-Grained Soils Using the Sedimentation (Hydrometer) Analysis

American Association of State Highway and Transportation Officials (AASHTO)

M288	Standard Specification for Geosynthetic Specification for Highway Applications

END OF ITEM P-208

ITEM P-403 ASPHALT MIX PAVEMENT SURFACE COURSE

DESCRIPTION

403-1.1 This item shall consist of pavement courses composed of mineral aggregate and asphalt binder mixed in a central mixing plant and placed on a prepared course in accordance with these specifications and shall conform to the lines, grades, thicknesses, and typical cross-sections shown on the plans. Each course shall be constructed to the depth, typical section, and elevation required by the plans and shall be rolled, finished, and approved before the placement of the next course.

MATERIALS

403-2.1 Aggregate. Aggregates shall consist of crushed stone, crushed gravel, ~~crushed slag,~~ screenings, natural sand and mineral filler, as required. The aggregates should have no known history of detrimental pavement staining due to ferrous sulfides, such as pyrite. Coarse aggregate is the material retained on the No. 4 (4.75 mm) sieve. Fine aggregate is the material passing the No. 4 (4.75 mm) sieve.

a. Coarse aggregate. Coarse aggregate shall consist of sound, tough, durable particles, free from films of matter that would prevent thorough coating and bonding with the asphalt material and free from organic matter and other deleterious substances. Coarse aggregate material requirements are given in the table below.

Coarse Aggregate Material Requirements

Material Test	Requirement	Standard
Resistance to Degradation	Loss: 40% maximum for surface, asphalt binder, and leveling course ~~Loss: 50% maximum for base course~~	ASTM C131
Soundness of Aggregates by Use of Sodium Sulfate **or** Magnesium Sulfate	Loss after 5 cycles: 12% maximum using Sodium sulfate - or - 18% maximum using magnesium sulfate	ASTM C88
Clay lumps and friable particles	1.0% maximum	ASTM C142
Percentage of Fractured Particles	For pavements designed for aircraft gross weights less than 60,000 pounds: Minimum 50% by weight of particles with at least two fractured faces and 65% with at least one fractured face[1]	ASTM D5821
Flat, Elongated, or Flat and Elongated Particles	8% maximum, by weight, of flat, elongated, or flat and elongated particles with a value of 5:1 [2]	ASTM D4791
~~Bulk density of slag[3]~~	~~Weigh not less than 70 pounds per cubic foot~~	~~ASTM C29.~~

[1] The area of each face shall be equal to at least 75% of the smallest mid-sectional area of the piece. When two fractured faces are contiguous, the angle between the planes of fractures shall be at least 30 degrees to count as two fractured faces.

[2] A flat particle is one having a ratio of width to thickness greater than five (5); an elongated particle is one having a ratio of length to width greater than five (5).

[3] ~~Only required if slag is specified.~~

b. Fine aggregate. Fine aggregate shall consist of clean, sound, tough, durable, angular shaped particles produced by crushing stone, ~~slag~~, or gravel and shall be free from coatings of clay, silt, or other objectionable matter. Natural (non-manufactured) sand may be used to obtain the gradation of the

aggregate blend or to improve the workability of the mix. Fine aggregate material requirements are listed in the table below.

Fine Aggregate Material Requirements

Material Test	Requirement	Standard
Liquid limit	25 maximum	ASTM D4318
Plasticity Index	4 maximum	ASTM D4318
Soundness of Aggregates by Use of Sodium Sulfate or Magnesium Sulfate	Loss after 5 cycles: 10% maximum using Sodium sulfate - or - 15% maximum using magnesium sulfate	ASTM C88
Clay lumps and friable particles	1.0% maximum	ASTM C142
Sand equivalent	45 minimum	ASTM D2419
Natural Sand	0 to 15% maximum by weight of total aggregate	ASTM D1073

c. Sampling. ASTM D75 shall be used in sampling coarse and fine aggregate, and ASTM C183 shall be used in sampling mineral filler.

403-2.2 Mineral filler. Mineral filler (baghouse fines) may be added in addition to material naturally present in the aggregate. Mineral filler shall meet the requirements of ASTM D242.

Mineral filler Requirements

Material Test	Requirement	Standard
Plasticity Index	4 maximum	ASTM D4318

403-2.3 Asphalt binder. Asphalt binder shall conform to ASTM D6373 Performance Grade (PG) 70-22. *MoDOT grade PG 64-22H is equivalent to PG 70-22.*

403-2.4 Anti-stripping agent. Any anti-stripping agent or additive (anti-strip) shall be heat stable and shall not change the asphalt binder grade beyond specifications. Anti-strip shall be an approved material of the Department of Transportation of the State in which the project is located.

COMPOSITION

403-3.1 Composition of mixture. The asphalt plant mix shall be composed of a mixture of well-graded aggregate, filler and anti-strip agent if required, and asphalt binder. The several aggregate fractions shall be sized, handled in separate size groups, and combined in such proportions that the resulting mixture meets the grading requirements of the job mix formula (JMF).

403-3.2 Job mix formula (JMF) laboratory. The laboratory used to develop the JMF shall possess a current certificate of accreditation, listing D3666 from a national accrediting authority and all test methods required for developing the JMF, and listed on the accrediting authority's website. A copy of the laboratory's current accreditation and accredited test methods shall be submitted to the RPR prior to start of construction.

403-3.3 Job mix formula (JMF). No asphalt mixture shall be placed until an acceptable mix design has been submitted to the RPR for review and accepted in writing. The RPR's review shall not relieve the Contractor of the responsibility to select and proportion the materials to comply with this section.

When the project requires asphalt mixtures of differing aggregate gradations and/or binders, a separate JMF shall be submitted for each mix. Add anti-stripping agent to meet tensile strength requirements.

The JMF shall be prepared by an accredited laboratory that meets the requirements of paragraph 403-3.2. The asphalt mixture shall be designed using procedures contained in Asphalt Institute MS-2 Mix Design Manual, 7th Edition. Samples shall be prepared and compacted using the gyratory compactor in accordance with ASTM D6925.

Should a change in sources of materials be made, a new JMF must be submitted to the RPR for review and accepted in writing before the new material is used. After the initial production JMF has been approved by the RPR and a new or modified JMF is required for whatever reason, the subsequent cost of the new or modified JMF, including a new control strip when required by the RPR, will be borne by the Contractor.

The RPR may request samples at any time for testing, prior to and during production, to verify the quality of the materials and to ensure conformance with the applicable specifications.

The JMF shall be submitted in writing by the Contractor at least 30 days prior to the start of paving operations. The JMF shall be developed within the same construction season using aggregates proposed for project use.

The submitted JMF shall be dated, and stamped or sealed by the responsible professional Engineer of the laboratory and shall include the following items as a minimum:

- Manufacturer's Certificate of Analysis (COA) for the asphalt binder used in the JMF in accordance with paragraph 403-2.3. Certificate of asphalt performance grade is with modifier already added, if used and must indicate compliance with ASTM D6373. For plant modified asphalt binder, certified test report indicating grade certification of modified asphalt binder.
- Manufacturer's Certificate of Analysis (COA) for the anti-stripping agent if used in the JMF in accordance with paragraph 403-2.4.
- Certified material test reports for the course and fine aggregate and mineral filler in accordance with paragraphs 403-2.1 and 403-2.2.
- Percent passing each sieve size for individual gradation of each aggregate cold feed and/or hot bin; percent by weight of each cold feed and/or hot bin used; and the total combined gradation in the JMF.
- Specific Gravity and absorption of each course and fine aggregate.
- Percent natural sand.
- Percent fractured faces.
- Percent by weight of flat particles, elongated particles, and flat and elongated particles (and criteria).
- Percent of asphalt.
- Number of blows or gyrations.
- Laboratory mixing and compaction temperatures.
- Supplier recommended mixing and compaction temperatures.
- Plot of the combined gradation on the 0.45 power gradation curve.
- Graphical plots of air voids, voids in the mineral aggregate (VMA), and unit weight versus asphalt content. To achieve minimum VMA during production, the mix design needs to account for material breakdown during production.

- Tensile Strength Ratio (TSR).
- Type and amount of Anti-strip agent when used.
- Asphalt Pavement Analyzer (APA) results.
- Date the JMF was developed. Mix designs that are not dated or which are from a prior construction season shall not be accepted.

Table 1. Asphalt Design Criteria

Test Property	Value	Test Method
Number of blows/gyrations	50	
Air voids (%)	3.5	ASTM D3203
Percent voids in mineral aggregate (VMA), minimum	See Table 2	ASTM D6995
TSR[1]	not less than 80 at a saturation of 70-80%	ASTM D4867
~~Asphalt Pavement Analyzer (APA)[2,3]~~	~~Less than 10 mm @ 4000 passes~~	~~AASHTO T340 at 250 psi hose pressure at 64°C test temperature~~

1 Test specimens for TSR shall be compacted at 7 ± 1.0 % air voids. In areas subject to freeze-thaw, use freeze-thaw conditioning in lieu of moisture conditioning per ASTM D4867.

~~2 AASHTO T340 at 100 psi hose pressure at 64°C test temperature may be used in the interim. If this method is used the required Value shall be less than 5 mm @ 8000 passes~~

The mineral aggregate shall be of such size that the percentage composition by weight, as determined by laboratory sieves, will conform to the gradation or gradations specified in Table 2 when tested in accordance with ASTM C136 and ASTM C117.

The gradations in Table 2 represent the limits that shall determine the suitability of aggregate for use from the sources of supply, be well graded from coarse to fine and shall not vary from the low limit on one sieve to the high limit on the adjacent sieve, or vice versa.

Table 2. Aggregate - Asphalt Pavements

Sieve Size	Percentage by Weight Passing Sieve
1 inch (25.0 mm)	--
3/4 inch (19.0 mm)	100
1/2 inch (12.5 mm)	90-100
3/8 inch (9.5 mm)	72-88
No. 4 (4.75 mm)	53-73
No. 8 (2.36 mm)	38-60
No. 16 (1.18 mm)	26-48
No. 30 (600 µm)	18-38
No. 50 (300 µm)	11-27
No. 100 (150 µm)	6-18
No. 200 (75 µm)	3-6
Voids in Mineral Aggregate (VMA)[1]	15
Asphalt Percent:	
Stone or gravel	5.0-7.5
~~Slag~~	*
Recommended Minimum Construction Lift Thickness	2 inch

[1]To achieve minimum VMA during production, the mix design needs to account for material breakdown during production.

The aggregate gradations shown are based on aggregates of uniform specific gravity. The percentages passing the various sieves shall be corrected when aggregates of varying specific gravities are used, as indicated in the Asphalt Institute MS-2 Mix Design Manual, 7th Edition.

403-3.4 Reclaimed Asphalt Pavement (RAP). RAP shall not be used.

403-3.5 Control strip. A control strip is not required.

CONSTRUCTION METHODS

403-4.1 Weather limitations. The asphalt shall not be placed upon a wet surface or when the surface temperature of the underlying course is less than specified in Table 4. The temperature requirements may be waived by the RPR, if requested; however, all other requirements including compaction shall be met.

Table 4. Surface Temperature Limitations of Underlying Course

Mat Thickness	Base Temperature (Minimum)
	Degrees F
3 inches or greater	40
Greater than 2 inches but less than 3 inches	45

403-4.2 Asphalt plant. Plants used for the preparation of asphalt shall conform to the requirements of American Association of State Highway and Transportation Officials (AASHTO) M156 including the following items:

a. Inspection of plant. The RPR, or RPR's authorized representative, shall have access, at all times, to all areas of the plant for checking adequacy of equipment; inspecting operation of the plant: verifying weights, proportions, and material properties; and checking the temperatures maintained in the preparation of the mixtures.

b. Storage bins and surge bins. The asphalt mixture stored in storage and/or surge bins shall meet the same requirements as asphalt mixture loaded directly into trucks. Asphalt mixture shall not be stored in storage and/or surge bins for a period greater than twelve (12) hours. If the RPR determines there is an excessive heat loss, segregation or oxidation of the asphalt mixture due to temporary storage, temporary storage shall not be allowed.

403-4.3 Aggregate stockpile management. Aggregate stockpiles shall be constructed in such a manner that prevents segregation and intermixing of deleterious materials. Aggregates from different sources shall be stockpiled, weighed and batched separately at the concrete batch plant. Aggregates that have become segregated or mixed with earth or foreign material shall not be used.

A continuous supply of materials shall be provided to the work to ensure continuous placement.

403-4.4 Hauling equipment. Trucks used for hauling asphalt shall have tight, clean, and smooth metal beds. To prevent the asphalt from sticking to the truck beds, the truck beds shall be lightly coated with a minimum amount of paraffin oil, lime solution, or other material approved by the RPR. Petroleum products shall not be used for coating truck beds. Each truck shall have a suitable cover to protect the mixture from adverse weather. When necessary, to ensure that the mixture will be delivered to the site at the specified temperature, truck beds shall be insulated or heated and covers shall be securely fastened.

403-4.4.1 Material transfer vehicle (MTV). A material transfer vehicle is not required.

403-4.5 Asphalt pavers. Asphalt pavers shall be self-propelled with an activated heated screed, capable of spreading and finishing courses of asphalt that will meet the specified thickness, smoothness, and grade. The paver shall have sufficient power to propel itself and the hauling equipment without adversely affecting the finished surface. The asphalt paver shall be equipped with a control system capable of automatically maintaining the specified screed grade and elevation.

If the spreading and finishing equipment in use leaves tracks or indented areas, or produces other blemishes in the pavement that are not satisfactorily corrected by the scheduled operations, the use of such equipment shall be discontinued.

The paver shall be capable of paving to a minimum width specified in paragraph 401-4.11.

403-4.6 Rollers. The number, type, and weight of rollers shall be sufficient to compact the asphalt to the required density while it is still in a workable condition without crushing of the aggregate, depressions or other damage to the pavement surface. Rollers shall be in good condition, capable of operating at slow speeds to avoid displacement of the asphalt. All rollers shall be specifically designed and suitable for compacting asphalt concrete and shall be properly used. Rollers that impair the stability of any layer of a pavement structure or underlying soils shall not be used.

403-4.6.1 Density device. The Contractor shall have on site a density gauge during all paving operations in order to assist in the determination of the optimum rolling pattern, type of roller and frequencies, as well as to monitor the effect of the rolling operations during production paving. The Contractor shall also supply a qualified technician during all paving operations to calibrate the density gauge and obtain accurate density readings for all new asphalt. These densities shall be supplied to the RPR upon request at any time during construction. No separate payment will be made for supplying the density gauge and technician.

403-4.7 Preparation of asphalt binder. The asphalt binder shall be heated in a manner that will avoid local overheating and provide a continuous supply of the asphalt material to the mixer at a uniform temperature. The temperature of the unmodified asphalt binder delivered to the mixer shall be sufficient to

provide a suitable viscosity for adequate coating of the aggregate particles, but shall not exceed 325°F when added to the aggregate. The temperature of modified asphalt binder shall be no more than 350°F when added to the aggregate.

403-4.8 Preparation of mineral aggregate. The aggregate for the asphalt shall be heated and dried. The maximum temperature and rate of heating shall be such that no damage occurs to the aggregates. The temperature of the aggregate and mineral filler shall not exceed 350°F when the asphalt binder is added. Particular care shall be taken that aggregates high in calcium or magnesium content are not damaged by overheating. The temperature shall not be lower than is required to obtain complete coating and uniform distribution on the aggregate particles and to provide a mixture of satisfactory workability.

403-4.9 Preparation of asphalt mixture. The aggregates and the asphalt binder shall be weighed or metered and introduced into the mixer in the amount specified by the JMF. The combined materials shall be mixed until the aggregate obtains a uniform coating of asphalt binder and is thoroughly distributed throughout the mixture. Wet mixing time shall be the shortest time that will produce a satisfactory mixture, but not less than 25 seconds for batch plants. The wet mixing time for all plants shall be established by the Contractor, based on the procedure for determining the percentage of coated particles described in ASTM D2489, for each individual plant and for each type of aggregate used. The wet mixing time will be set to achieve 95% of coated particles. For continuous mix plants, the minimum mixing time shall be determined by dividing the weight of its contents at operating level by the weight of the mixture delivered per second by the mixer. The moisture content of all asphalt upon discharge shall not exceed 0.5%.

403-4.10 Application of Prime and Tack Coat. Immediately before placing the asphalt mixture, the underlying course shall be cleaned of all dust and debris.

A prime coat in accordance with Item P-602 shall be applied to aggregate base prior to placing the asphalt mixture.

A tack coat shall be applied in accordance with Item P-603 to all vertical and horizontal asphalt and concrete surfaces prior to placement of the first and each subsequent lift of asphalt mixture.

403-4.11 Laydown plan, transporting, placing, and finishing. Prior to the placement of the asphalt, the Contractor shall prepare a laydown plan with the sequence of paving lanes and width to minimize the number of cold joints; the location of any temporary ramps; laydown temperature; and estimated time of completion for each portion of the work (milling, paving, rolling, cooling, etc.). The laydown plan and any modifications shall be approved by the RPR.

Deliveries shall be scheduled so that placing and compacting of asphalt is uniform with minimum stopping and starting of the paver. Hauling over freshly placed material shall not be permitted until the material has been compacted, as specified, and allowed to cool to approximately ambient temperature. The Contractor, at their expense, shall be responsible for repair of any damage to the pavement caused by hauling operations.

Contractor shall survey each lift of asphalt surface course and certify to RPR that every lot of each lift meets the grade tolerances of paragraph 401-6.2e before the next lift can be placed.

Edges of existing asphalt pavement abutting the new work shall be saw cut and the cut off material and laitance removed. Apply a tack coat in accordance with P-603 before new asphalt material is placed against it.

The speed of the paver shall be regulated to eliminate pulling and tearing of the asphalt mat. Placement of the asphalt mix shall begin along the centerline of a crowned section or on the high side of areas with a one way slope unless shown otherwise on the laydown plan as accepted by the RPR. The asphalt mix shall be placed in consecutive adjacent lanes having a minimum width of 12.5 feet except where edge lanes require less width to complete the area. Additional screed sections attached to widen the paver to meet the minimum lane width requirements must include additional auger sections to move the asphalt mixture uniformly along the screed extension.

The longitudinal joint in one course shall offset the longitudinal joint in the course immediately below by at least 1 foot; however, the joint in the surface top course shall be at the centerline of crowned pavements. Transverse joints in one course shall be offset by at least 10 feet from transverse joints in the previous course. Transverse joints in adjacent lanes shall be offset a minimum of 10 feet. On areas where irregularities or unavoidable obstacles make the use of mechanical spreading and finishing equipment impractical, the asphalt may be spread and luted by hand tools.

The RPR may at any time, reject any batch of asphalt, on the truck or placed in the mat, which is rendered unfit for use due to contamination, segregation, incomplete coating of aggregate, or overheated asphalt mixture. Such rejection may be based on only visual inspection or temperature measurements. In the event of such rejection, the Contractor may take a representative sample of the rejected material in the presence of the RPR, and if it can be demonstrated in the laboratory, in the presence of the RPR, that such material was erroneously rejected, payment will be made for the material at the contract unit price.

Areas of segregation in the surface course, as determined by the RPR, shall be removed and replaced at the Contractor's expense. The area shall be removed by saw cutting and milling a minimum of the construction lift thickness as specified in paragraph 401-3.3, Table 2 for the approved mix design. The area to be removed and replaced shall be a minimum width of the paver and a minimum of 10 feet long.

403-4.12 Compaction of asphalt mixture. After placing, the asphalt mixture shall be thoroughly and uniformly compacted by self-propelled rollers. The surface shall be compacted as soon as possible when the asphalt has attained sufficient stability so that the rolling does not cause undue displacement, cracking or shoving. The sequence of rolling operations and the type of rollers used shall be at the discretion of the Contractor. The speed of the roller shall, at all times, be sufficiently slow to avoid displacement of the hot mixture and be effective in compaction. Any surface defects and/or displacement occurring as a result of the roller, or from any other cause, shall be corrected at the Contractor's expense.

Sufficient rollers shall be furnished to handle the output of the plant. Rolling shall continue until the surface is of uniform texture, true to grade and cross-section, and the required field density is obtained. To prevent adhesion of the asphalt to the roller, the wheels shall be equipped with a scraper and kept moistened with water as necessary.

In areas not accessible to the roller, the mixture shall be thoroughly compacted with approved power tampers.

Any asphalt that becomes loose and broken, mixed with dirt, contains check-cracking, or in any way defective shall be removed and replaced with fresh hot mixture and immediately compacted to conform to the surrounding area. This work shall be done at the Contractor's expense. Skin patching shall not be allowed.

403-4.13 Joints. The formation of all joints shall be made in such a manner as to ensure a continuous bond between the courses and obtain the required density. All joints shall have the same texture as other sections of the course and meet the requirements for smoothness and grade.

The roller shall not pass over the unprotected end of the freshly laid asphalt except when necessary to form a transverse joint. When necessary to form a transverse joint, it shall be made by means of placing a bulkhead or by tapering the course. The tapered edge shall be cut back to its full depth and width on a straight line to expose a vertical face prior to placing the adjacent lane. In both methods, all contact surfaces shall be coated with an asphalt tack coat before placing any fresh asphalt against the joint.

Longitudinal joints which are have been left exposed for more than four (4) hours; the surface temperature has cooled to less than 175°F; or are irregular, damaged, uncompacted or otherwise defective shall be cut back with a cutting wheel or pavement saw a maximum of 3 inches to expose a clean, sound, uniform vertical surface for the full depth of the course. All cutback material and any laitance produced from cutting joints shall be removed from the project. An asphalt tack coat or other product approved by the RPR shall be applied to the clean, dry joint prior to placing any additional fresh asphalt against the joint. The cost of this work shall be considered incidental to the cost of the asphalt.

403-4.14 Saw-cut grooving. Saw-cut grooving is not required.

403-4.15 Diamond grinding. Diamond grinding shall be completed prior to pavement grooving. Diamond grinding shall be accomplished by sawing with saw blades impregnated with industrial diamond abrasive.

Diamond grinding shall be performed with a machine designed specifically for diamond grinding capable of cutting a path at least 3 feet wide. The saw blades shall be 1/8-inch wide with a minimum of 55 to 60 blades per 12 inches of cutting head width; grooves between 0.090 and 0.130 inches wide; and peaks and ridges approximately 1/32 inch higher than the bottom of the grinding cut. The actual number of blades will be determined by the Contractor and depend on the hardness of the aggregate. Equipment or grinding procedures that causes ravels, aggregate fractures, spalls or disturbance to the pavement will not be permitted.

Grinding will be tapered in all directions to provide smooth transitions to areas not requiring grinding. The slurry resulting from the grinding operation shall be continuously removed and the pavement left in a clean condition. The Contractor shall apply a surface treatment per P-608 to all areas that have been subject to grinding.

403-4.16 Nighttime Paving Requirements. The Contractor shall provide adequate lighting during any nighttime construction. A lighting plan shall be submitted by the Contractor and approved by the RPR prior to the start of any nighttime work. All work shall be in accordance with the approved CSPP and lighting plan.

CONTRACTOR QUALITY CONTROL (CQC)

403-5.1 General. The Contractor shall develop a CQCP in accordance with Item C-100. No partial payment will be made for materials that are subject to specific QC requirements without an approved CQCP.

403-5.2 Contractor quality control (QC) facilities. The Contractor shall provide or contract for testing facilities in accordance with Item C-100. The RPR shall be permitted unrestricted access to inspect the Contractor's QC facilities and witness QC activities. The RPR will advise the Contractor in writing of any noted deficiencies concerning the QC facility, equipment, supplies, or testing personnel and procedures. When the deficiencies are serious enough to be adversely affecting the test results, the incorporation of the materials into the work shall be suspended immediately and will not be permitted to resume until the deficiencies are satisfactorily corrected.

403-5.3 Quality Control (QC) testing. The Contractor shall perform all QC tests necessary to control the production and construction processes applicable to these specifications and as set forth in the approved CQCP. The testing program shall include, but not necessarily be limited to, tests for the control of asphalt content, aggregate gradation, temperatures, aggregate moisture, field compaction, and surface smoothness. A QC Testing Plan shall be developed as part of the CQCP.

a. Asphalt content. A minimum of two tests shall be performed per day in accordance with ASTM D6307 or ASTM D2172 for determination of asphalt content. When using ASTM D6307, the correction factor shall be determined as part of the first test performed at the beginning of plant production; and as part of every tenth test performed thereafter. The asphalt content for the day will be determined by averaging the test results.

b. Gradation. Aggregate gradations shall be determined a minimum of twice per lot from mechanical analysis of extracted aggregate in accordance with ASTM D5444 and ASTM C136, and ASTM C117.

c. Moisture content of aggregate. The moisture content of aggregate used for production shall be determined a minimum of once per lot in accordance with ASTM C566.

d. Moisture content of asphalt. The moisture content of the asphalt shall be determined once per lot in accordance with AASHTO T329 or ASTM D1461.

e. Temperatures. Temperatures shall be checked, at least four times per lot, at necessary locations to determine the temperatures of the dryer, the asphalt binder in the storage tank, the asphalt at the plant, and the asphalt at the job site.

f. In-place density monitoring. The Contractor shall conduct any necessary testing to ensure that the specified density is being achieved. A nuclear gauge may be used to monitor the pavement density in accordance with ASTM D2950.

g. Smoothness for Contractor Quality Control.

The Contractor shall perform smoothness testing in transverse and longitudinal directions daily to verify that the construction processes are producing pavement with variances less than ¼ inch in 12 feet, identifying areas that may pond water which could lead to hydroplaning of aircraft. If the smoothness criteria is not met, appropriate changes and corrections to the construction process shall be made by the Contractor before construction continues

The Contractor may use a 12-foot straightedge, a rolling inclinometer meeting the requirements of ASTM E2133 or rolling external reference device that can simulate a 12-foot straightedge approved by the RPR. Straight-edge testing shall start with one-half the length of the straightedge at the edge of pavement section being tested and then moved ahead one-half the length of the straightedge for each successive measurement. Testing shall be continuous across all joints. The surface irregularity shall be determined by placing the freestanding (unleveled) straightedge on the pavement surface and allowing it to rest upon the two highest spots covered by its length, and measuring the maximum gap between the straightedge and the pavement surface in the area between the two high points. If the rolling inclinometer or external reference device is used, the data may be evaluated using either the FAA profile program, ProFAA, or FHWA ProVal, using the 12-foot straightedge simulation function.

Smoothness readings shall not be made across grade changes or cross slope transitions. The transition between new and existing pavement shall be evaluated separately for conformance with the plans.

(1) Transverse measurements. Transverse measurements shall be taken for each day's production placed. Transverse measurements will be taken perpendicular to the pavement centerline each 50 feet (15 m) or more often as determined by the RPR. The joint between lanes shall be tested separately to facilitate smoothness between lanes.

(2) Longitudinal measurements. Longitudinal measurements shall be taken for each day's production placed. Longitudinal tests will be parallel to the centerline of paving; at the center of paving lanes when widths of paving lanes are less than 20 feet; and at the third points of paving lanes when widths of paving lanes are 20 ft or greater. When placement abuts previously placed material, the first measurement shall start with one half the length of the straight edge on the previously placed material.

Deviations on the final surface course in either the transverse or longitudinal direction that will trap water greater than 1/4 inch shall be corrected with diamond grinding per paragraph 403-4.15 or by removing and replacing the surface course to full depth. Grinding shall be tapered in all directions to provide smooth transitions to areas not requiring grinding. All areas in which diamond grinding has been performed shall be subject to the final pavement thickness tolerances specified in paragraph 401-6.1d(3) Areas that have been ground shall be sealed with a surface treatment in accordance with Item P-608. To avoid the surface treatment creating any conflict with runway or taxiway markings, it may be necessary to seal a larger area.

Control charts shall be kept to show area of each day's placement and the percentage of corrective grinding required. Corrections to production and placement shall be initiated when corrective grinding is required. If the Contractor's machines and/or methods produce significant areas that need corrective actions in excess of 10 percent of a day's production, production shall be stopped until corrective measures are implemented by the Contractor.

h. Grade. Grade shall be evaluated daily to allow adjustments to paving operations when grade measurements do not meet specifications. As a minimum, grade shall be evaluated prior to the placement of the first lift and then prior to and after placement of the surface lift.

Measurements will be taken at appropriate gradelines (as a minimum at center and edges of paving lane) and longitudinal spacing as shown on cross-sections and plans. The final surface of the pavement will not vary from the gradeline elevations and cross-sections shown on the plans by more than 1/2 inch

vertically. The documentation will be provided by the Contractor to the RPR by the end of the following working day.

Areas with humps or depressions that exceed grade or smoothness criteria and that retain water on the surface must be ground off provided the course thickness after grinding is not more than 1/2 inch less than the thickness specified on the plans. Grinding shall be in accordance with paragraph 403-4.15.

The Contractor shall repair low areas or areas that cannot be corrected by grinding by removal of deficient areas to the depth of the final course plus ½ inch and replacing with new material. Skin patching is not allowed.

403-5.4 Sampling. When directed by the RPR, the Contractor shall sample and test any material that appears inconsistent with similar material being sampled, unless such material is voluntarily removed and replaced or deficiencies corrected by the Contractor. All sampling shall be in accordance with standard procedures specified.

403-5.5 Control charts. The Contractor shall maintain linear control charts both for individual measurements and range (i.e., difference between highest and lowest measurements) for aggregate gradation, asphalt content, and VMA. The VMA for each day shall be calculated and monitored by the QC laboratory.

Control charts shall be posted in a location satisfactory to the RPR and kept current. As a minimum, the control charts shall identify the project number, the contract item number, the test number, each test parameter, the Action and Suspension Limits applicable to each test parameter, and the Contractor's test results. The Contractor shall use the control charts as part of a process control system for identifying potential problems and assignable causes before they occur. If the Contractor's projected data during production indicates a problem and the Contractor is not taking satisfactory corrective action, the RPR may suspend production or acceptance of the material.

a. Individual measurements. Control charts for individual measurements shall be established to maintain process control within tolerance for aggregate gradation, asphalt content, and VMA. The control charts shall use the JMF target values as indicators of central tendency for the following test parameters with associated Action and Suspension Limits:

Control Chart Limits for Individual Measurements

Sieve	Action Limit	Suspension Limit
3/4 inch (19.0 mm)	±6%	±9%
1/2 inch (12.5 mm)	±6%	±9%
3/8 inch (9.5 mm)	±6%	±9%
No. 4 (4.75 mm)	±6%	±9%
No. 16 (1.18 mm)	±5%	±7.5%
No. 50 (300 µm)	±3%	±4.5%
No. 200 (75 µm)	±2%	±3%
Asphalt Content	±0.45%	±0.70%
Minimum VMA	-0.5%	-1.0%

b. Range. Control charts for range shall be established to control process variability for the test parameters and Suspension Limits listed below. The range shall be computed for each lot as the difference between the two test results for each control parameter. The Suspension Limits specified below are based on a sample size of n = 2. Should the Contractor elect to perform more than two tests per lot, the Suspension Limits shall be adjusted by multiplying the Suspension Limit by 1.18 for n = 3 and by 1.27 for n = 4.

Control Chart Limits Based on Range
(n = 2)

Sieve	Suspension Limit
1/2 inch (12.5 mm)	11%
3/8 inch (9.5 mm)	11%
No. 4 (4.75 mm)	11%
No. 16 (1.18 mm)	9%
No. 50 (300 µm)	6%
No. 200 (75 µm)	3.5%
Asphalt Content	0.8%

c. Corrective action. The CQCP shall indicate that appropriate action shall be taken when the process is believed to be out of tolerance. The Plan shall contain sets of rules to gauge when a process is out of control and detail what action will be taken to bring the process into control. As a minimum, a process shall be deemed out of control and production stopped and corrective action taken, if:

(1) One point falls outside the Suspension Limit line for individual measurements or range; or

(2) Two points in a row fall outside the Action Limit line for individual measurements.

403-5.6 Quality control (QC) reports. The Contractor shall maintain records and shall submit reports of QC activities daily, in accordance with the CQCP described in Item C-100.

MATERIAL ACCEPTANCE

403-6.1. Quality Assurance Acceptance sampling and testing. Unless otherwise specified, all acceptance sampling and testing necessary to determine conformance with the requirements specified in this section will be performed by the RPR at no cost to the Contractor except that coring as required in this section shall be completed and paid for by the Contractor.

a. Quality Assurance (QA) testing laboratory. The QA testing laboratory performing these acceptance tests will be accredited in accordance with ASTM D3666. The QA laboratory accreditation will be current and listed on the accrediting authority's website. All test methods required for acceptance sampling and testing will be listed on the lab accreditation.

b. Lot Size. A standard lot will be equal to one day's production divided into approximately equal sublots of between 400 to 600 tons. When only one or two sublots are produced in a day's production, the sublots will be combined with the production lot from the previous or next day.

Where more than one plant is simultaneously producing asphalt for the job, the lot sizes will apply separately for each plant.

c. Asphalt air voids. Plant-produced asphalt will be tested for air voids on a sublot basis.

(1) Sampling. Material from each sublot shall be sampled in accordance with ASTM D3665. Samples shall be taken from material deposited into trucks at the plant or at the job site in accordance with ASTM D979. The sample of asphalt may be put in a covered metal tin and placed in an oven for not less than 30 minutes nor more than 60 minutes to maintain the material at or above the compaction temperature as specified in the JMF.

(2) Testing. Air voids will be determined for each sublot in accordance with ASTM D3203 for a set of compacted specimens prepared in accordance with ASTM D6925.

d. In-place asphalt mat and joint density. Each sublot will be tested for in-place mat and joint density as a percentage of the theoretical maximum density (TMD).

(1) Sampling. The Contractor will cut minimum 5 inches diameter samples in accordance with ASTM D5361. The Contractor shall furnish all tools, labor, and materials for cleaning, and filling the cored pavement. Laitance produced by the coring operation shall be removed immediately after coring, and core holes shall be filled within one day after sampling in a manner acceptable to the RPR.

(2) Bond. Each lift of asphalt shall be bonded to the underlying layer. If cores reveal that the surface is not bonded, additional cores shall be taken as directed by the RPR to determine the extent of unbonded areas. Unbonded areas shall be removed by milling and replaced at no additional cost as directed by the RPR.

(3) Thickness. Thickness of each lift of surface course will be evaluated by the RPR for compliance to the requirements shown on the plans after any necessary corrections for grade. Measurements of thickness will be made using the cores extracted for each sublot for density measurement. The maximum allowable deficiency at any point will not be more than 1/4 inch less than the thickness indicated for the lift. Average thickness of lift, or combined lifts, will not be less than the indicated thickness. Where the thickness tolerances are not met, the lot or sublot shall be corrected by the Contractor at his expense by removing the deficient area and replacing with new pavement. The Contractor, at his expense, may take additional cores as approved by the RPR to circumscribe the deficient area.

(4) Mat density. One core shall be taken from each sublot. Core locations will be determined by the RPR in accordance with ASTM D3665. Cores for mat density shall not be taken closer than one foot from a transverse or longitudinal joint. The bulk specific gravity of each cored sample will be determined in accordance with ASTM D2726. The percent compaction (density) of each sample will be determined by dividing the bulk specific gravity of each sublot sample by the TMD for that sublot.

(5) Joint density. One core centered over the longitudinal joint shall be taken for each sublot which contains a longitudinal joint. Core locations will be determined by the RPR in accordance with ASTM D3665. The bulk specific gravity of each core sample will be determined in accordance with ASTM D2726. The percent compaction (density) of each sample will be determined by dividing the bulk specific gravity of each joint density sample by the average TMD for the lot. The TMD used to determine the joint density at joints formed between lots will be the lower of the average TMD values from the adjacent lots.

403-6.2 Acceptance criteria.

a. General. Acceptance will be based on the implementation of the Contractor Quality Control Program (CQCP) and the following characteristics of the asphalt and completed pavements: air voids, mat density, joint density, grade.

b. Air voids. Acceptance of each lot of plant produced material for air voids will be based upon the average air void from the sublots. If the average air voids of the lot are equal to or greater than 2% and equal to or less than 5%, then the lot will be acceptable. If the average is below 2% or greater than 5%, the lot shall be removed and replaced at the Contractor's expense.

c. Mat density. Acceptance of each lot of plant produced material for mat density will be based on the average of all of the densities taken from the sublots. If the average mat density of the lot so established equals or exceeds 94%, the lot will be acceptable. If the average mat density of the lot is below 94%, the lot shall be removed and replaced at the Contractor's expense.

d. Joint density. Acceptance of each lot of plant produced asphalt for joint density will be based on the average of all of the joint densities taken from the sublots. If the average joint density of the lot so established equals or exceeds 92%, the lot will be acceptable. If the average joint density of the lot is less than 92%, the Contractor shall stop production and evaluate the method of compacting joints. Production may resume once the reason for poor compaction has been determined and appropriate measures have been taken to ensure proper compaction.

e. Grade. The final finished surface of the pavement of the completed project shall be surveyed to verify that the grade elevations and cross-sections shown on the plans do not deviate more than 1/2 inch vertically.

Cross-sections of the pavement shall be taken at a minimum 50-foot longitudinal spacing and at all longitudinal grade breaks. Minimum cross-section grade points shall include grade at centerline, ± 12 feet of centerline, and edge of *apron* pavement.

The survey and documentation shall be stamped and signed by a licensed surveyor. Payment for sublots that do not meet grade for over 25% of the sublot shall not be more than 95%.

f. Profilograph roughness for QA Acceptance. Not used.

403-6.3 Resampling Pavement for Mat Density.

a. General. Resampling of a lot of pavement will only be allowed for mat density and then, only if the Contractor requests same in writing, within 48 hours after receiving the written test results from the RPR. A retest will consist of all the sampling and testing procedures contained in paragraphs 403-6.1. Only one resampling per lot will be permitted.

(1) A redefined mat density will be calculated for the resampled lot. The number of tests used to calculate the redefined mat density will include the initial tests made for that lot plus the retests.

(2) The cost for resampling and retesting shall be borne by the Contractor.

b. Payment for resampled lots. The redefined mat density for a resampled lot will be used to evaluate the acceptance of that lot in accordance with paragraph 403-6.2.

c. Outliers. Check for outliers in accordance with ASTM E178, at a significance level of 5%. Outliers will be discarded and density determined using the remaining test values.

METHOD OF MEASUREMENT

403-7.1 Measurement. Plant mix asphalt mix pavement shall be measured by the number of tons of asphalt pavement used in the accepted work. Recorded batch weights or truck scale weights will be used to determine the basis for the tonnage.

BASIS OF PAYMENT

403-8.1 Payment. Payment for a lot of asphalt mixture meeting all acceptance criteria as specified in paragraph 403-6.2 shall be made at the contract unit price per ton for asphalt. The price shall be compensation for furnishing all materials, for all preparation, mixing, and placing of these materials, and for all labor, equipment, tools, and incidentals necessary to complete the item.

Payment will be made under:

Item P-403-8.1	Asphalt Mixture Surface Course - per ton

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM International (ASTM)

ASTM C29	Standard Test Method for Bulk Density ("Unit Weight") and Voids in Aggregate
ASTM C88	Standard Test Method for Soundness of Aggregates by Use of Sodium Sulfate or Magnesium Sulfate
ASTM C117	Standard Test Method for Materials Finer than 75-µm (No. 200) Sieve in Mineral Aggregates by Washing
ASTM C127	Standard Test Method for Density, Relative Density (Specific Gravity), and Absorption of Coarse Aggregate

ASTM C131	Standard Test Method for Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
ASTM C136	Standard Test Method for Sieve or Screen Analysis of Fine and Coarse Aggregates
ASTM C142	Standard Test Method for Clay Lumps and Friable Particles in Aggregates
ASTM C183	Standard Practice for Sampling and the Amount of Testing of Hydraulic Cement
ASTM C566	Standard Test Method for Total Evaporable Moisture Content of Aggregate by Drying
ASTM D75	Standard Practice for Sampling Aggregates
ASTM D242	Standard Specification for Mineral Filler for Bituminous Paving Mixtures
ASTM D946	Standard Specification for Penetration-Graded Asphalt Cement for Use in Pavement Construction
ASTM D979	Standard Practice for Sampling Bituminous Paving Mixtures
ASTM D1073	Standard Specification for Fine Aggregate for Bituminous Paving Mixtures
ASTM D1074	Standard Test Method for Compressive Strength of Bituminous Mixtures
ASTM D1461	Standard Test Method for Moisture or Volatile Distillates in Bituminous Paving Mixtures
ASTM D2041	Standard Test Method for Theoretical Maximum Specific Gravity and Density of Bituminous Paving Mixtures
ASTM D2172	Standard Test Method for Quantitative Extraction of Bitumen from Bituminous Paving Mixtures
ASTM D2419	Standard Test Method for Sand Equivalent Value of Soils and Fine Aggregate
ASTM D2489	Standard Practice for Estimating Degree of Particle Coating of Bituminous-Aggregate Mixtures
ASTM D2726	Standard Test Method for Bulk Specific Gravity and Density of Non-Absorptive Compacted Bituminous Mixtures
ASTM D2950	Standard Test Method for Density of Bituminous Concrete in Place by Nuclear Methods
ASTM D3203	Standard Test Method for Percent Air Voids in Compacted Dense and Open Bituminous Paving Mixtures
ASTM D3381	Standard Specification for Viscosity-Graded Asphalt Cement for Use in Pavement Construction
ASTM D3665	Standard Practice for Random Sampling of Construction Materials
ASTM D3666	Standard Specification for Minimum Requirements for Agencies Testing and Inspecting Road and Paving Materials
ASTM D4125	Standard Test Methods for Asphalt Content of Bituminous mixtures by the Nuclear Method

ASTM D4318	Standard Test Methods for Liquid Limit, Plastic Limit, and Plasticity Index of Soils
ASTM D4552	Standard Practice for Classifying Hot-Mix Recycling Agents
ASTM D4791	Standard Test Method for Flat Particles, Elongated Particles, or Flat and Elongated Particles in Coarse Aggregate
ASTM D4867	Standard Test Method for Effect of Moisture on Asphalt Concrete Paving Mixtures
ASTM D5444	Standard Test Method for Mechanical Size Analysis of Extracted Aggregate
ASTM D5581	Standard Test Method for Resistance to Plastic Flow of Bituminous Mixtures Using Marshall Apparatus (6 inch-Diameter Specimen)
ASTM D5821	Standard Test Method for Determining the Percentage of Fractured Particles in Coarse Aggregate
ASTM D6307	Standard Test Method for Asphalt Content of Hot-Mix Asphalt by Ignition Method
ASTM D6373	Standard Specification for Performance Graded Asphalt Binder
ASTM D6752	Standard Test Method for Bulk Specific Gravity and Density of Compacted Bituminous Mixtures Using Automatic Vacuum Sealing Method
ASTM D6925	Standard Test Method for Preparation and Determination of the Relative Density of Hot Mix Asphalt (HMA) Specimens by Means of the SuperPave Gyratory Compactor
ASTM D6926	Standard Practice for Preparation of Bituminous Specimens Using Marshall Apparatus
ASTM D6927	Standard Test Method for Marshall Stability and Flow of Bituminous Mixtures
ASTM D6995	Standard Test Method for Determining Field VMA based on the Maximum Specific Gravity of the Mix (Gmm)
ASTM E11	Standard Specification for Woven Wire Test Sieve Cloth and Test Sieves
ASTM E178	Standard Practice for Dealing with Outlying Observations
ASTM E2133	Standard Test Method for Using a Rolling Inclinometer to Measure Longitudinal and Transverse Profiles of a Traveled Surface

American Association of State Highway and Transportation Officials (AASHTO)

AASHTO M156	Standard Specification for Requirements for Mixing Plants for Hot-Mixed, Hot-Laid Bituminous Paving Mixtures
AASHTO T329	Standard Method of Test for Moisture Content of Hot Mix Asphalt (HMA) by Oven Method
AASHTO T 340	Standard Method of Test for Determining the Rutting Susceptibility of Hot Mix Asphalt (APA) Using the Asphalt Pavement Analyzer (APA)

Asphalt Institute (AI)

MS-2	Mix Design Manual, 7th Edition

MS-26	Asphalt Binder AI State Binder Specification Database	Handbook

FAA Orders

5300.1 Modifications to Agency Airport Design, Construction, and Equipment Standards

Federal Highway Administration (FHWA)

Long Term Pavement Performance Binder program

Software

FAARFIELD

END OF ITEM P-403

PAGE INTENTIONALLY LEFT BLANK

ITEM P-501 CEMENT CONCRETE PAVEMENT

DESCRIPTION

501-1.1 This work shall consist of pavement composed of cement concrete without reinforcement constructed on a prepared underlying surface in accordance with these specifications and shall conform to the lines, grades, thickness, and typical cross-sections shown on the plans. The terms cement concrete, hydraulic cement concrete, and concrete are interchangeable in this specification.

MATERIALS

501-2.1 Aggregates.

a. Reactivity. Fine and Coarse aggregates to be used in PCC on this project shall be tested and evaluated by the Contractor for alkali-aggregate reactivity in accordance with both ASTM C1260 and ASTM C1567. Tests must be representative of aggregate sources which will be providing material for production. ASTM C1260 and ASTM C1567 tests may be run concurrently.

(1) Coarse aggregate and fine aggregate shall be tested separately in accordance with ASTM C1260, however, the length of test shall be extended to 28 days (30 days from casting). Tests must have been completed within 6 months of the date of the concrete mix submittal.

(2) The combined coarse and fine aggregate shall be tested in accordance with ASTM C1567, modified for combined aggregates, using the proposed mixture design proportions of aggregates, cementitious materials, and/or specific reactivity reducing chemicals. If the expansion does not exceed 0.10% at 28 days, the proposed combined materials will be accepted. If the expansion is greater than 0.10% at 28 days, the aggregates will not be accepted unless adjustments to the combined materials mixture can reduce the expansion to less than 0.10% at 28 days, or new aggregates shall be evaluated and tested.

(3) If lithium nitrate is proposed for use with or without supplementary cementitious materials, the aggregates shall be tested in accordance with Corps of Engineers (COE) Concrete Research Division (CRD) C662 in lieu of ASTM C1567. If lithium nitrate admixture is used, it shall be nominal 30% ±0.5% weight lithium nitrate in water. If the expansion does not exceed 0.10% at 28 days, the proposed combined materials will be accepted. If the expansion is greater than 0.10% at 28 days, the aggregates will not be accepted unless adjustments to the combined materials mixture can reduce the expansion to less than 0.10% at 28 days, or new aggregates shall be evaluated and tested.

b. Fine aggregate. Grading of the fine aggregate, as delivered to the mixer, shall conform to the requirements of ASTM C33 and the parameters identified in the fine aggregate material requirements below. Fine aggregate material requirements and deleterious limits are shown in the table below.

Fine Aggregate Material Requirements		
Soundness of Aggregates by Use of Sodium Sulfate **or** Magnesium Sulfate	Loss after 5 cycles: 10% maximum using Sodium sulfate - or - 15% maximum using magnesium sulfate	ASTM C88
Sand Equivalent	45 minimum	ASTM D2419
Fineness Modulus (FM)	2.50 ≤ FM ≤ 3.40	ASTM C136
Limits for Deleterious Substances in Fine Aggregate for Concrete		
Clay lumps and friable particles	1.0% maximum	ASTM C142
Coal and lignite	0.5% using a medium with a density of Sp. Gr. of 2.0	ASTM C123
Total Deleterious Material	1.0% maximum	

c. Coarse aggregate. The maximum size coarse aggregate shall be **1-1/2-inch**.

Aggregates delivered to the mixer shall be clean, hard, uncoated aggregates consisting of crushed stone, crushed or uncrushed gravel, air-cooled iron blast furnace slag, crushed recycled concrete pavement, or a combination. The aggregates shall have no known history of detrimental pavement staining. Steel blast furnace slag shall not be permitted. Coarse aggregate material requirements and deleterious limits are shown in the table below; washing may be required to meet aggregate requirements.

Coarse Aggregate Material Requirements

Material Test	Requirement	Standard
Resistance to Degradation	Loss: 40% maximum	ASTM C131
Soundness of Aggregates by Use of Sodium Sulfate **or** Magnesium Sulfate	Loss after 5 cycles: 12% maximum using Sodium sulfate - or - 18% maximum using magnesium sulfate	ASTM C88
Flat, Elongated, or Flat and Elongated Particles	8% maximum, by weight, of flat, elongated, or flat and elongated particles at 5:1 for any size group coarser than 3/8 (9.5 mm) sieve [1]	ASTM D4791
Bulk density of slag [2]	Weigh not less than 70 pounds per cubic foot (1.12 Mg/cubic meter)	ASTM C29
D-cracking (Freeze-Thaw)[3]	Durability factor ≥ 95	ASTM C666

[1] A flat particle is one having a ratio of width to thickness greater than five (5); an elongated particle is one having a ratio of length to width greater than five (5).

[2] Only required if slag is specified.

[3] Coarse aggregate may only be accepted from sources that have a 20-year service history for the same gradation to be supplied with no history of D-Cracking. Aggregates that do not have a 20-year record of service free from major repairs (less than 5% of slabs replaced) in similar conditions without D-cracking shall not be used unless the material currently being produced has a durability factor greater than or equal to 95 per ASTM C666. The Contractor shall submit a current certification and test results to verify the aggregate acceptability. Test results will only be accepted from a State Department of Transportation (DOT) materials laboratory or an accredited laboratory. Certification

and test results which are not dated or which are over one (1) year old or which are for different gradations will not be accepted.

The amount of deleterious material in the coarse aggregate shall not exceed the following limits:

Limits for Deleterious Substances in Coarse Aggregate

Deleterious material	ASTM	Percentage by Mass
Clay Lumps and friable particles	ASTM C142	1.0
Material finer than No. 200 sieve (75 µm)	ASTM C117	1.0[1]
Lightweight particles	ASTM C123 using a medium with a density of Sp. Gr. of 2.0	0.5
Chert[2] (less than 2.40 Sp Gr.)	ASTM C123 using a medium with a density of Sp. Gr. of 2.40)	0.1[3]

[1] The limit for material finer than 75-µm is allowed to be increased to 1.5% for crushed aggregates consisting of dust of fracture that is essentially free from clay or shale. Test results supporting acceptance of increasing limit to 1.5% with statement indicating material is dust of fracture must be submitted with Concrete mix. Acceptable techniques to characterizing these fines include methylene blue adsorption or X-ray diffraction analysis.

[2] Chert and aggregates with less than 2.4 specific gravity.

[3] The limit for chert may be increased to 1.0 percent by mass in areas not subject to severe freeze and thaw.

d. Combined aggregate gradation. This specification is targeted for a combined aggregate gradation developed following the guidance presented in United States Air Force Engineering Technical Letter (ETL) 97-5: Proportioning Concrete Mixtures with Graded Aggregates for Rigid Airfield Pavements. Base the aggregate grading upon a combination of all the aggregates (coarse and fine) to be used for the mixture proportioning. Three aggregate sizes may be required to achieve an optimized combined gradation that will produce a workable concrete mixture for its intended use. Use aggregate gradations that produce concrete mixtures with well-graded or optimized aggregate combinations. The Contractor shall submit complete mixture information necessary to calculate the volumetric components of the mixture. The combined aggregate grading shall meet the following requirements:

(1) The materials selected and the proportions used shall be such that when the Coarseness Factor (CF) and the Workability Factor (WF) are plotted on a diagram as described in paragraph 501-2.1d(4) below, the point thus determined shall fall within the parallelogram described therein.

(2) The CF shall be determined from the following equation:

CF = (cumulative percent retained on the 3/8 in. (9.5 mm) sieve)(100) / (cumulative percent retained on the No. 8 (2.36 mm) sieve)

(3) The WF is defined as the percent passing the No. 8 (2.36 mm) sieve based on the combined gradation. However, WF shall be adjusted, upwards only, by 2.5 percentage points for each 94 pounds (42 kg) of cementitious material per cubic meter yard greater than 564 pounds per cubic yard.

(4) A diagram shall be plotted using a rectangular scale with WF on the Y-axis with units from 20 (bottom) to 45 (top), and with CF on the X-axis with units from 80 (left side) to 30 (right side). On this diagram a parallelogram shall be plotted with corners at the following coordinates (CF-75, WF-28), (CF-75, WF-40), (CF-45, WF-32.5), and (CF-45, WF-44.5). If the point determined by the intersection of the computed CF and WF does not fall within the above parallelogram, the grading of each size of aggregate used and the proportions selected shall be changed as necessary. The point determined by the plotting of

the CF and WF may be adjusted during production ±3 WF and ±5 CF. Adjustments to gradation may not take the point outside of the parallelogram.

e. Contractors combined aggregate gradation. The Contractor shall submit their combined aggregate gradation using the following format:

Contractor's Combined Aggregate Gradation

Sieve Size	Contractor's Concrete mix Gradation (Percent passing by weight)
2 inch (50 mm)	
1-1/2 inch (37.5 mm)	
1 inch (25.0 mm)	
3/4 inch (19.0 mm)	
1/2 inch (12.5 mm)	
3/8 inch (9.5 mm)	
No. 4 (4.75 mm)	
No. 8 (2.36 mm)	
No. 16 (1.18 mm)	
No. 30 (600 µm)	
No. 50 (300 µm)	
No. 100 (150 µm)	

501-2.2 Cement. Cement shall conform to the requirements of ASTM C 150 Type I or II, or ASTM C 595 – TYPE IP or IS.

501-2.3 Cementitious materials.

a. Fly ash. Fly ash shall meet the requirements of ASTM C618, with the exception of loss of ignition, where the maximum shall be less than 6%. Fly ash shall have a Calcium Oxide (CaO) content of less than 15% and a total alkali content less than 3% per ASTM C311. The Contractor shall furnish the previous three most recent, consecutive ASTM C618 reports for each source of fly ash proposed in the concrete mix, and shall furnish each additional report as they become available during the project. The reports can be used for acceptance or the material may be tested independently by the Resident Project Representative (RPR).

~~**b. Slag cement (ground granulated blast furnace (GGBF)).** Slag cement shall conform to ASTM C989, Grade 100 or Grade 120. Slag cement shall be used only at a rate between 25% and 55% of the total cementitious material by mass.~~

c. Raw or calcined natural pozzolan. Natural pozzolan shall be raw or calcined and conform to ASTM C618, Class N, including the optional requirements for uniformity and effectiveness in controlling Alkali-Silica reaction and shall have a loss on ignition not exceeding 6%. Class N pozzolan for use in mitigating Alkali-Silica Reactivity shall have a total available alkali content less than 3%.

501-2.4 Joint seal. The joint seal for the joints in the concrete pavement shall meet the requirements of Item P-604 and shall be of the type specified in the plans.

501-2.5 Isolation joint filler. Premolded joint filler for isolation joints shall conform to the requirements of ~~*ASTM D1751 or*~~ ASTM D1752, *Type II* and shall be where shown on the plans. The filler for each joint shall be furnished in a single piece for the full depth and width required for the joint, unless otherwise specified by the RPR. When the use of more than one piece is required for a joint, the abutting ends shall be fastened securely and held accurately to shape by stapling or other positive fastening means satisfactory to the RPR.

501-2.6 Steel reinforcement. Reinforcing shall consist of Bars conforming to the requirements of ASTM A615.

501-2.7 Dowel and tie bars. Dowel bars shall be plain steel bars conforming to ASTM A615 and shall be free from burring or other deformation restricting slippage in the concrete.

a. Dowel Bars. Before delivery to the construction site each dowel bar shall be epoxy coated per ASTM A1078, Type 1, with a coating thickness after curing greater than 10 mils. Patched ends are not required for Type 1 coated dowels. The dowels shall be coated with a bond-breaker recommended by the manufacturer. Dowel sleeves or inserts are not permitted. Grout retention rings shall be fully circular metal or plastic devices capable of supporting the dowel until the grout hardens.

b. Tie Bars. Tie bars shall be deformed steel bars and conform to the requirements of ASTM A615. Tie bars designated as Grade 60 in ASTM A615 or ASTM A706 shall be used for construction requiring bent bars.

501-2.8 Water. Water used in mixing or curing shall be potable. If water is taken from other sources considered non-potable, it shall meet the requirements of ASTM C1602.

501-2.9 Material for curing concrete. Curing materials shall conform to one of the following specifications:

a. Liquid membrane-forming compounds for curing concrete shall conform to the requirements of ASTM C309, Type 2, Class A, or Class B.

b. White polyethylene film for curing concrete shall conform to the requirements of ASTM C171.

c. White burlap-polyethylene sheeting for curing concrete shall conform to the requirements of ASTM C171.

d. Waterproof paper for curing concrete shall conform to the requirements of ASTM C171.

501-2.10 Admixtures. Admixtures shall conform to the following specifications:

a. Air-entraining admixtures. Air-entraining admixtures shall meet the requirements of ASTM C260 and shall consistently entrain the air content in the specified ranges under field conditions. The air-entraining agent and any water reducer admixture shall be compatible.

b. Water-reducing admixtures. Water-reducing admixture shall meet the requirements of ASTM C494, Type A, B, or D.

c. Other admixtures. The use of set retarding and set-accelerating admixtures shall be approved by the RPR prior to developing the concrete mix. Retarding admixtures shall meet the requirements of ASTM C494, Type A, B, or D and set-accelerating admixtures shall meet the requirements of ASTM C494, Type C. Calcium chloride and admixtures containing calcium chloride shall not be used.

d. Lithium Nitrate. The lithium admixture shall be a nominal 30% aqueous solution of Lithium Nitrate, with a density of 10 pounds/gallon (1.2 kg/L), and shall have the approximate chemical form as shown below:

Lithium Admixture

Constituent	Limit (Percent by Mass)
LiNO3 (Lithium Nitrate)	30 ±0.5
SO4 (Sulfate Ion)	0.1 (max)
Cl (Chloride Ion)	0.2 (max)
Na (Sodium Ion)	0.1 (max)
K (Potassium Ion)	0.1 (max)

The lithium nitrate admixture dispensing and mixing operations shall be verified and certified by the lithium manufacturer's representative.

501-2.11 Epoxy-resin. All epoxy-resin materials shall be two-component materials conforming to the requirements of ASTM C881, Class as appropriate for each application temperature to be encountered, except that in addition, the materials shall meet the following requirements:

a. Material for use for embedding dowels and anchor bolts shall be Type IV, Grade 3.

b. Material for use as patching materials for complete filling of spalls and other voids and for use in preparing epoxy resin mortar shall be Type III, Grade as approved.

c. Material for use for injecting cracks shall be Type IV, Grade 1.

d. Material for bonding freshly mixed Portland cement concrete or mortar or freshly mixed epoxy resin concrete or mortar to hardened concrete shall be Type V, Grade as approved.

501-2.12 Bond Breaker. If used in lieu of an asphalt leveling course, the bond breaker shall be one of the following.

a. Choke stone shall be an ASTM C33 Number 89 stone.

b. Fabric shall meet the requirements of AASHTO M 288 Class I fabric with elongation not less than 50% at the specified strengths, with a weight not less than 14.5 oz/sy. A certificate of compliance (COC) shall be provided by the fabric manufacturer that the material may be used as a bond breaker.

CONCRETE MIX

501-3.1. General. No concrete shall be placed until an acceptable concrete mix has been submitted to the RPR for review and the RPR has taken appropriate action. The RPR's review shall not relieve the Contractor of the responsibility to select and proportion the materials to comply with this section.

501-3.2 Concrete Mix Laboratory. The laboratory used to develop the concrete mix shall be accredited in accordance with ASTM C1077. The laboratory accreditation must be current and listed on the accrediting authority's website. All test methods required for developing the concrete mix must be included in the lab accreditation. A copy of the laboratory's current accreditation and accredited test methods shall be submitted to the RPR prior to start of construction.

501-3.3 Concrete Mix Proportions. Develop the mix using the procedures contained in Portland Cement Association (PCA) publication, "Design and Control of Concrete Mixtures." Concrete shall be proportioned to achieve a 28-day flexural strength that meets or exceeds the acceptance criteria contained in paragraph 501-6.6 for a flexural strength of 650 psi per ASTM C78.

The minimum cementitious material shall be adequate to ensure a workable, durable mix. The minimum cementitious material (cement plus fly ash, or slag cement) shall be 517 pounds per cubic yard. The ratio of water to cementitious material, including free surface moisture on the aggregates but not including moisture absorbed by the aggregates shall be between 0.38 – 0.45 by weight.

Flexural strength test specimens shall be prepared in accordance with ASTM C192 and tested in accordance with ASTM C78. At the start of the project, the Contractor shall determine an allowable slump as determined by ASTM C143 not to exceed 2 inches for slip-form placement. For fixed-form placement, the slump shall not exceed 3 inches. For hand placement, the slump shall not exceed 4 inches. The results of the concrete mix shall include a statement giving the maximum nominal coarse aggregate size and the weights and volumes of each ingredient proportioned on a one cubic yard (meter) basis. Aggregate quantities shall be based on the mass in a saturated surface dry condition.

If a change in source(s) is made, or admixtures added or deleted from the mix, a new concrete mix must be submitted to the RPR for approval.

The RPR may request samples at any time for testing, prior to and during production, to verify the quality of the materials and to ensure conformance with the applicable specifications.

501-3.4 Concrete Mix submittal. The concrete mix shall be submitted to the RPR at least 30 days prior to the start of operations. The submitted concrete mix shall not be more than 180 days old and must use the materials to be used for production for the project. Production shall not begin until the concrete mix is approved in writing by the RPR.

Each of the submitted concrete mixes (i.e, slip form, side form machine finish and side form hand finish) shall be stamped or sealed by the responsible professional Engineer of the laboratory and shall include the following items and quantities as a minimum:

- Certified material test reports for aggregate in accordance with paragraph 501-2.1. Certified reports must include all tests required; reporting each test, test method, test result, and requirement specified (criteria).
- Combined aggregate gradations and analysis; and including plots of the fine aggregate fineness modulus.
- Reactivity Test Results.
- Coarse aggregate quality test results, including deleterious materials.
- Fine aggregate quality test results, including deleterious materials.
- Mill certificates for cement and supplemental cementitious materials.
- Certified test results for all admixtures, including Lithium Nitrate if applicable.
- Specified flexural strength, slump, and air content.
- Recommended proportions/volumes for proposed mixture and trial water-cementitious materials ratio, including actual slump and air content.
- Flexural and compressive strength summaries and plots, including all individual beam and cylinder breaks.
- Correlation ratios for acceptance testing and Contractor QC testing, when applicable.
- Historical record of test results documenting production standard deviation, when applicable.

501-3.5 Cementitious materials.

a. Fly ash. When fly ash is used as a partial replacement for cement, the replacement rate shall be determined from laboratory trial mixes, and shall be between 20 and 30% by weight of the total cementitious material. If fly ash is used in conjunction with slag cement the maximum replacement rate shall not exceed 10% by weight of total cementitious material.

~~**b. Slag cement (ground granulated blast furnace (GGBF)).** Slag cement may be used. The slag cement, or slag cement plus fly ash if both are used, may constitute between 25 to 55% of the total cementitious material by weight.~~

c. Raw or calcined natural pozzolan. Natural pozzolan may be used in the concrete mix. When pozzolan is used as a partial replacement for cement, the replacement rate shall be determined from laboratory trial mixes, and shall be between 20 and 30% by weight of the total cementitious material. If pozzolan is used in conjunction with slag cement the maximum replacement rate shall not exceed 10% by weight of total cementitious material.

501-3.6 Admixtures.

a. Air-entraining admixtures. Air-entraining admixture are to be added in such a manner that will ensure uniform distribution of the agent throughout the batch. The air content of freshly mixed air-entrained concrete shall be based upon trial mixes with the materials to be used in the work adjusted to produce concrete of the required plasticity and workability. The percentage of air in the mix shall be 4.5%. Air content shall be determined by testing in accordance with ASTM C231 for gravel and stone coarse aggregate and ASTM C173 for slag and other highly porous coarse aggregate.

b. Water-reducing admixtures. Water-reducing admixtures shall be added to the mix in the manner recommended by the manufacturer and in the amount necessary to comply with the specification requirements. Tests shall be conducted with the materials to be used in the work, in accordance with ASTM C494.

c. Other admixtures. Set controlling, and other approved admixtures shall be added to the mix in the manner recommended by the manufacturer and in the amount necessary to comply with the specification requirements. Tests shall be conducted with the materials to be used in the work, in accordance with ASTM C494.

d. Lithium nitrate. Lithium nitrate shall be added to the mix in the manner recommended by the manufacturer and in the amount necessary to comply with the specification requirements in accordance with paragraph 501-2.10d.

CONSTRUCTION METHODS

501-4.1 Control Strip. The control strip(s) shall be to the next planned joint after the initial 250 feet of each type of pavement construction (slip-form pilot lane, slip-form fill-in lane, or fixed form). The Contractor shall demonstrate, in the presence of the RPR, that the materials, concrete mix, equipment, construction processes, and quality control processes meet the requirements of the specifications. The concrete mixture shall be extruded from the paver meeting the edge slump tolerance and with little or no finishing. Pilot, fill-in, and fixed-form control strips will be accepted separately. Minor adjustments to the mix design may be required to place an acceptable control strip. The production mix will be the adjusted mix design used to place the acceptable control strip. Upon acceptance of the control strip by the RPR, the Contractor must use the same equipment, materials, and construction methods for the remainder of concrete paving. Any adjustments to processes or materials must be approved in advance by the RPR. Acceptable control strips will meet edge slump tolerance and surface acceptable with little or no finishing, air content within action limits, strength equal or greater than requirements of 501-3.3. The control strip will be considered one lot for payment (no sublots required for control strip). Payment will only be made for an acceptable control strip in accordance with paragraph 501-8.1 using a lot pay factor equal to 100.

501-4.2 Equipment. The Contractor is responsible for the proper operation and maintenance of all equipment necessary for handling materials and performing all parts of the work to meet this specification.

a. Plant and equipment. The plant and mixing equipment shall conform to the requirements of ASTM C94 and/or ASTM C685. Each truck mixer shall have attached in a prominent place a manufacturer's nameplate showing the capacity of the drum in terms of volume of mixed concrete and the speed of rotation of the mixing drum or blades. The truck mixers shall be examined daily for changes in condition due to accumulation of hard concrete or mortar or wear of blades. The pickup and throwover blades shall be replaced when they have worn down 3/4 inch or more. The Contractor shall have a copy of the manufacturer's design on hand showing dimensions and arrangement of blades in reference to original height and depth.

Equipment for transferring and spreading concrete from the transporting equipment to the paving lane in front of the finishing equipment shall be provided. The equipment shall be specially manufactured, self-propelled transfer equipment which will accept the concrete outside the paving lane and will spread it evenly across the paving lane in front of the paver and strike off the surface evenly to a depth which permits the paver to operate efficiently.

b. Finishing equipment.

(1) Slip-form. The standard method of constructing concrete pavements shall be with an approved slip-form paving equipment designed and operated to spread, consolidate, screed, and finish the freshly placed concrete in one complete pass of the machine so that the end result is a dense and homogeneous pavement which is achieved with a minimum of hand finishing. The paver-finisher shall be a heavy duty, self-propelled machine designed specifically for paving and finishing high quality concrete pavements.

(2) Fixed-form. On projects requiring less than 10,000 cubic yard of concrete pavement or irregular areas at locations inaccessible to slip-form paving equipment, concrete pavement may be placed with equipment specifically designed for placement and finishing using stationary side forms. Methods and equipment shall be reviewed and accepted by the RPR. Hand screeding and float finishing may only be used on small irregular areas as allowed by the RPR.

c. Vibrators. Vibrator shall be the internal type. The rate of vibration of each vibrating unit shall be sufficient to consolidate the pavement without segregation or voids. The number, spacing, and frequency shall be as necessary to provide a dense and homogeneous pavement and meet the recommendations of American Concrete Institute (ACI) 309R, Guide for Consolidation of Concrete. Adequate power to operate all vibrators shall be available on the paver. The vibrators shall be automatically controlled so that they shall be stopped as forward motion ceases. The Contractor shall provide an electronic or mechanical means to monitor vibrator status. The checks on vibrator status shall occur a minimum of two times per day or when requested by the RPR.

Hand held vibrators may only be used in irregular areas and shall meet the recommendations of ACI 309R, Guide for Consolidation of Concrete.

d. Concrete saws. The Contractor shall provide sawing equipment adequate in number of units and power to complete the sawing to the required dimensions. The Contractor shall provide at least one standby saw in good working order and a supply of saw blades at the site of the work at all times during sawing operations.

e. Fixed forms. Straight side fixed forms shall be made of steel and shall be furnished in sections not less than 10 feet in length. Forms shall be provided with adequate devices for secure settings so that when in place they will withstand, without visible spring or settlement, the impact and vibration of the consolidating and finishing equipment. Forms with battered top surfaces and bent, twisted or broken forms shall not be used. Built-up forms shall not be used, except as approved by the RPR. The top face of the form shall not vary from a true plane more than 1/8 inch in 10 feet, and the upstanding leg shall not vary more than 1/4 inch. The forms shall contain provisions for locking the ends of abutting sections together tightly for secure setting. Wood forms may be used under special conditions, when approved by the RPR. The forms shall extend the full depth of the pavement section.

501-4.3 Form setting. Forms shall be set to line and grade as shown on the plans, sufficiently in advance of the concrete placement, to ensure continuous paving operation. Forms shall be set to withstand, without visible spring or settlement, the impact and vibration of the consolidating and finishing equipment. Forms shall be cleaned and oiled prior to the concrete placement.

501-4.4 Base surface preparation prior to placement. Any damage to the prepared base, subbase, and subgrade shall be corrected full depth by the Contractor prior to concrete placement. The underlying surface shall be entirely free of frost when concrete is placed. The prepared grade shall be moistened with water, without saturating, immediately ahead of concrete placement to prevent rapid loss of moisture from concrete. Bond breaker shall be applied in accordance with 501-2.12.

501-4.5 Handling, measuring, and batching material. Aggregate stockpiles shall be constructed and managed in such a manner that prevents segregation and intermixing of deleterious materials. Aggregates from different sources shall be stockpiled, weighed and batched separately at the concrete batch plant. Aggregates that have become segregated or mixed with earth or foreign material shall not be used. All aggregates produced or handled by hydraulic methods, and washed aggregates, shall be stockpiled or binned for draining at least 12 hours before being batched. Store and maintain all aggregates at a uniform

moisture content prior to use. A continuous supply of materials shall be provided to the work to ensure continuous placement.

501-4.6 Mixing concrete. The concrete may be mixed at the work site, in a central mix plant or in truck mixers. The mixer shall be of an approved type and capacity. Mixing time shall be measured from the time all materials are placed into the drum until the drum is emptied into the truck. All concrete shall be mixed and delivered to the site in accordance with the requirements of ASTM C94 or ASTM C685.

Mixed concrete from the central mixing plant shall be transported in truck mixers, truck agitators, or non-agitating trucks. The elapsed time from the addition of cementitious material to the mix until the concrete is discharged from the truck should not exceed 30 minutes when the concrete is hauled in non-agitating trucks, nor 90 minutes when the concrete is hauled in truck mixers or truck agitators. In no case shall the temperature of the concrete when placed exceed 90°F. Retempering concrete by adding water or by other means will not be permitted. With transit mixers additional water may be added to the batch materials and additional mixing performed to increase the slump to meet the specified requirements provided the addition of water is performed within 45 minutes after the initial mixing operations and provided the water/cementitious ratio specified is not exceeded.

501-4.7 Weather Limitations on mixing and placing. No concrete shall be mixed, placed, or finished when the natural light is insufficient, unless an adequate and approved artificial lighting system is operated.

a. Cold weather. Unless authorized in writing by the RPR, mixing and concreting operations shall be discontinued when a descending air temperature in the shade and away from artificial heat reaches 40°F and shall not be resumed until an ascending air temperature in the shade and away from artificial heat reaches 35°F.

The aggregate shall be free of ice, snow, and frozen lumps before entering the mixer. The temperature of the mixed concrete shall not be less than 50°F at the time of placement. Concrete shall not be placed on frozen material nor shall frozen aggregates be used in the concrete.

When concreting is authorized during cold weather, water and/or the aggregates may be heated to not more than 150°F. The apparatus used shall heat the mass uniformly and shall be arranged to preclude the possible occurrence of overheated areas which might be detrimental to the materials.

Curing during cold weather shall be in accordance with paragraph 501-4.13d.

b. Hot weather. During periods of hot weather when the maximum daily air temperature exceeds 85°F, the following precautions shall be taken.

The forms and/or the underlying surface shall be sprinkled with water immediately before placing the concrete. The concrete shall be placed at the coolest temperature practicable, and in no case shall the temperature of the concrete when placed exceed 90°F. The aggregates and/or mixing water shall be cooled as necessary to maintain the concrete temperature at or not more than the specified maximum.

The concrete placement shall be protected from exceeding an evaporation rate of 0.2 per hour. When conditions are such that problems with plastic cracking can be expected, and particularly if any plastic cracking begins to occur, the Contractor shall immediately take such additional measures as necessary to protect the concrete surface. If the Contractor's measures are not effective in preventing plastic cracking, paving operations shall be immediately stopped.

Curing during hot weather shall be in accordance with paragraph 501-4.13e.

c. Temperature management program. Prior to the start of paving operation for each day of paving, the Contractor shall provide the RPR with a Temperature Management Program for the concrete to be placed to assure that uncontrolled cracking is avoided. (Federal Highway Administration HIPERPAV 3 is one example of a temperature management program.) As a minimum, the program shall address the following items:

(1) Anticipated tensile strains in the fresh concrete as related to heating and cooling of the concrete material.

(2) Anticipated weather conditions such as ambient temperatures, wind velocity, and relative humidity; and anticipated evaporation rate using Figure 19-9, PCA, Design and Control of Concrete Mixtures.

(3) Anticipated timing of initial sawing of joint.

(4) Anticipated number and type of saws to be used.

d. **Rain.** The Contractor shall have available materials for the protection of the concrete during inclement weather. Such protective materials shall consist of rolled polyethylene sheeting at least 4 mils (0.1 mm) thick of sufficient length and width to cover the plastic concrete slab and any edges. The sheeting may be mounted on either the paver or a separate movable bridge from which it can be unrolled without dragging over the plastic concrete surface. When rain appears imminent, all paving operations shall stop and all available personnel shall begin covering the surface of the unhardened concrete with the protective covering.

501-4.8 Concrete Placement. At any point in concrete conveyance, the free vertical drop of the concrete from one point to another or to the underlying surface shall not exceed 3 feet. The finished concrete product must be dense and homogeneous, without segregation and conforming to the standards in this specification. Backhoes and grading equipment shall not be used to distribute the concrete in front of the paver. Front end loaders will not be used. All concrete shall be consolidated without voids or segregation, including under and around all load-transfer devices, joint assembly units, and other features embedded in the pavement. Hauling equipment or other mechanical equipment can be permitted on adjoining previously constructed pavement when the concrete strength reaches a flexural strength of 550 psi or a compressive strength of 3,100 psi, based on the average of four field cured specimens per 2,000 cubic yards concrete placed. The Contractor must determine that the above minimum strengths are adequate to protection the pavement from overloads due to the construction equipment proposed for the project.

The Contractor shall have available materials for the protection of the concrete during cold, hot and/or inclement weather in accordance with paragraph 501-4.7.

a. Slip-form construction. The concrete shall be distributed uniformly into final position by a self-propelled slip-form paver without delay. The alignment and elevation of the paver shall be regulated from outside reference lines established for this purpose. The paver shall vibrate the concrete for the full width and depth of the strip of pavement being placed and the vibration shall be adequate to provide a consistency of concrete that will stand normal to the surface with sharp well-defined edges. The sliding forms shall be rigidly held together laterally to prevent spreading of the forms. The plastic concrete shall be effectively consolidated by internal vibration with transverse vibrating units for the full width of the pavement and/or a series of equally placed longitudinal vibrating units. The space from the outer edge of the pavement to longitudinal unit shall not exceed 9 for slip form and at the end of the dowels for the fill-in lanes. The spacing of internal units shall be uniform and shall not exceed 18 inches.

The term internal vibration means vibrating units located within the specified thickness of pavement section.

The rate of vibration of each vibrating unit shall be sufficient to consolidate the pavement without, segregation, voids, or vibrator trails and the amplitude of vibration shall be sufficient to be perceptible on the surface of the concrete along the entire length of the vibrating unit and for a distance of at least one foot. The frequency of vibration or amplitude should be adjusted proportionately with the rate of travel to result in a uniform density and air content. The paving machine shall be equipped with a tachometer or other suitable device for measuring and indicating the actual frequency of vibrations.

The concrete shall be held at a uniform consistency. The slip-form paver shall be operated with as nearly a continuous forward movement as possible and all operations of mixing, delivering, and spreading concrete shall be coordinated to provide uniform progress with stopping and starting of the paver held to a minimum. If for any reason, it is necessary to stop the forward movement of the paver, the vibratory and tamping elements shall also be stopped immediately. No tractive force shall be applied to the machine, except that which is controlled from the machine.

When concrete is being placed adjacent to an existing pavement, that part of the equipment which is supported on the existing pavement shall be equipped with protective pads on crawler tracks or rubber-tired wheels on which the bearing surface is offset to run a sufficient distance from the edge of the pavement to avoid breaking the pavement edge.

Not more than 15% of the total free edge of each 500-foot segment of pavement, or fraction thereof, shall have an edge slump exceeding 1/4 inch, and none of the free edge of the pavement shall have an edge slump exceeding 3/8 inch. (The total free edge of 500 feet of pavement will be considered the cumulative total linear measurement of pavement edge originally constructed as nonadjacent to any existing pavement; that is, 500 feet of paving lane originally constructed as a separate lane will have 1,000 feet of free edge, 500 feet of fill-in lane will have no free edge, etc.). The area affected by the downward movement of the concrete along the pavement edge shall be limited to not more than 18 inches from the edge.

When excessive edge slump cannot be corrected before the concrete has hardened, the area with excessive edge slump will be removed the full width of the slip form lane and replaced at the expense of the Contractor as directed by the RPR.

b. Fixed-form construction. Forms shall be drilled in advance of being placed to line and grade to accommodate tie bars / dowel bars where these are specified.

Immediately in advance of placing concrete and after all subbase operations are completed, side forms shall be trued and maintained to the required line and grade for a distance sufficient to prevent delay in placing.

Side forms shall remain in place at least 12 hours after the concrete has been placed, and in all cases until the edge of the pavement no longer requires the protection of the forms. Curing compound shall be applied to the concrete immediately after the forms have been removed.

Side forms shall be thoroughly cleaned and coated with a release agent each time they are used and before concrete is placed against them.

Concrete shall be spread, screed, shaped and consolidated by one or more self-propelled machines. These machines shall uniformly distribute and consolidate concrete without segregation so that the completed pavement will conform to the required cross-section with a minimum of handwork.

The number and capacity of machines furnished shall be adequate to perform the work required at a rate equal to that of concrete delivery. The equipment must be specifically designed for placement and finishing using stationary side forms. Methods and equipment shall be reviewed and accepted by the RPR.

Concrete for the full paving width shall be effectively consolidated by internal vibrators. The rate of vibration of each vibrating unit shall be sufficient to consolidate the pavement without segregation, voids, or leaving vibrator trails.

Power to vibrators shall be connected so that vibration ceases when forward or backward motion of the machine is stopped.

c. Consolidation. Concrete shall be consolidated with the specified type of lane-spanning, gang-mounted, mechanical, immersion type vibrating equipment mounted in front of the paver, supplemented, in rare instances as specified, by hand-operated vibrators. The vibrators shall be inserted into the concrete to a depth that will provide the best full-depth consolidation but not closer to the underlying material than 2 inches. Vibrators shall not be used to transport or spread the concrete. For each paving train, at least one additional vibrator spud, or sufficient parts for rapid replacement and repair of vibrators shall be maintained at the paving site at all times. Any evidence of inadequate consolidation (honeycomb along the edges, large air pockets, or any other evidence) or over-consolidation (vibrator trails, segregation, or any other evidence) shall require the immediate stopping of the paving operation and adjustment of the equipment or procedures as approved by the RPR.

If a lack of consolidation of the hardened concrete is suspected by the RPR, referee testing may be required. Referee testing of hardened concrete will be performed by the RPR by cutting cores from the

finished pavement after a minimum of 24 hours curing. The RPR shall visually examine the cores for evidence of lack of consolidation. Density determinations will be made by the RPR based on the water content of the core as taken. ASTM C642 shall be used for the determination of core density in the saturated-surface dry condition. When required, referee cores will be taken at the minimum rate of one for each 500 cubic yards of pavement, or fraction. The Contractor shall be responsible for all referee testing cost if they fail to meet the required density.

The average density of the cores shall be at least 97% of the original concrete mix density, with no cores having a density of less than 96% of the original concrete mix density. Failure to meet the referee tests will be considered evidence that the minimum requirements for vibration are inadequate for the job conditions. Additional vibrating units or other means of increasing the effect of vibration shall be employed so that the density of the hardened concrete conforms to the above requirements.

501-4.9 Strike-off of concrete and placement of reinforcement. Following the placing of the concrete, it shall be struck off to conform to the cross-section shown on the plans and to an elevation that when the concrete is properly consolidated and finished, the surface of the pavement shall be at the elevation shown on the plans. When reinforced concrete pavement is placed in two layers, the bottom layer shall be struck off to such length and depth that the sheet of reinforcing steel fabric or bar mat may be laid full length on the concrete in its final position without further manipulation. The reinforcement shall then be placed directly upon the concrete, after which the top layer of the concrete shall be placed, struck off, and screed. If any portion of the bottom layer of concrete has been placed more than 30 minutes without being covered with the top layer or if initial set has taken place, it shall be removed and replaced with freshly mixed concrete at the Contractor's expense. When reinforced concrete is placed in one layer, the reinforcement may be positioned in advance of concrete placement or it may be placed in plastic concrete by mechanical or vibratory means after spreading.

Reinforcing steel, at the time concrete is placed, shall be free of mud, oil, or other organic matter that may adversely affect or reduce bond. Reinforcing steel with rust, mill scale or a combination of both will be considered satisfactory, provided the minimum dimensions, weight, and tensile properties of a hand wire-brushed test specimen are not less than the applicable ASTM specification requirements.

501-4.10 Joints. Joints shall be constructed as shown on the plans and in accordance with these requirements. All joints shall be constructed with their faces perpendicular to the surface of the pavement and finished or edged as shown on the plans. Joints shall not vary more than 1/2-inch from their designated position and shall be true to line with not more than 1/4-inch variation in 10 feet. The surface across the joints shall be tested with a 12-foot straightedge as the joints are finished and any irregularities in excess of 1/4 inch shall be corrected before the concrete has hardened. All joints shall be so prepared, finished, or cut to provide a groove of uniform width and depth as shown on the plans.

a. Construction. Longitudinal construction joints shall be slip-formed or formed against side forms as shown in the plans.

Transverse construction joints shall be installed at the end of each day's placing operations and at any other points within a paving lane when concrete placement is interrupted for more than 30 minutes or it appears that the concrete will obtain its initial set before fresh concrete arrives. The installation of the joint shall be located at a planned contraction or expansion joint. If placing of the concrete is stopped, the Contractor shall remove the excess concrete back to the previous planned joint.

b. Contraction. Contraction joints shall be installed at the locations and spacing as shown on the plans. Contraction joints shall be installed to the dimensions required by forming a groove or cleft in the top of the slab while the concrete is still plastic or by sawing a groove into the concrete surface after the concrete has hardened. When the groove is formed in plastic concrete the sides of the grooves shall be finished even and smooth with an edging tool. If an insert material is used, the installation and edge finish shall be according to the manufacturer's instructions. The groove shall be finished or cut clean so that spalling will be avoided at intersections with other joints. Grooving or sawing shall produce a slot at least 1/8 inch wide and to the depth shown on the plans.

c. Isolation (expansion). Isolation joints shall be installed as shown on the plans. The premolded filler of the thickness as shown on the plans, shall extend for the full depth and width of the slab at the joint. The filler shall be fastened uniformly along the hardened joint face with no buckling or debris between the filler and the concrete interface, including a temporary filler for the sealant reservoir at the top of the slab. The edges of the joint shall be finished and tooled while the concrete is still plastic

d. Dowels and Tie Bars for Joints

(1) Tie bars. Tie bars shall consist of deformed bars installed in joints as shown on the plans. Tie bars shall be placed at right angles to the centerline of the concrete slab and shall be spaced at intervals shown on the plans. They shall be held in position parallel to the pavement surface and in the middle of the slab depth and within the tolerances in paragraph 501-4.10(f.). When tie bars extend into an unpaved lane, they may be bent against the form at longitudinal construction joints, unless threaded bolt or other assembled tie bars are specified. Tie bars shall not be painted, greased, or enclosed in sleeves. When slip-form operations call for tie bars, two-piece hook bolts can be installed.

(2) Dowel bars. Dowel bars shall be placed across joints in the proper horizontal and vertical alignment as shown on the plans. The dowels shall be coated with a bond-breaker or other lubricant recommended by the manufacturer and approved by the RPR. Dowels bars at longitudinal construction joints shall be bonded in drilled holes.

(3) Placing dowels and tie bars. Horizontal spacing of dowels shall be within a tolerance of ±3/4 inch. The vertical location on the face of the slab shall be within a tolerance of ±1/2 inch. The method used to install dowels shall ensure that the horizontal and vertical alignment will not be greater than 1/4 inch per feet, except for those across the crown or other grade change joints. Dowels across crowns and other joints at grade changes shall be measured to a level surface. Horizontal alignment shall be checked perpendicular to the joint edge. The portion of each dowel intended to move within the concrete or expansion cap shall be wiped clean and coated with a thin, even film of lubricating oil or light grease before the concrete is placed. Dowels shall be installed as specified in the following subparagraphs.

(a) Contraction joints. Dowels and tie bars in longitudinal and transverse contraction joints within the paving lane shall be held securely in place by means of rigid metal frames or basket assemblies of an approved type. The basket assemblies shall be held securely in the proper location by means of suitable pins or anchors. Do not cut or crimp the dowel basket tie wires.

At the Contractor's option, dowels and tie bars in contraction joints may be installed by insertion into the plastic concrete using approved equipment and procedures per the paver manufacturer's design. Approval of installation methods will be based on the results of the control strip showing that the dowels and tie bars are installed within specified tolerances as verified by cores or non-destructive rebar location devices approved by the RPR.

(b) Construction joints. Install dowels and tie bars by the cast-in- place or the drill-and-dowel method. Installation by removing and replacing in preformed holes will not be permitted. Dowels and tie bars shall be prepared and placed across joints where indicated, correctly aligned, and securely held in the proper horizontal and vertical position during placing and finishing operations, by means of devices fastened to the forms.

(c) Joints in hardened concrete. Install dowels in hardened concrete by bonding the dowels into holes drilled into the concrete. The concrete shall have cured for seven (7) days or reached a minimum compressive strength of 3100 psi or a flexural strength of 450 psi before drilling begins. Holes 1/8 inch (3 mm) greater in diameter than the dowels shall be drilled into the hardened concrete using rotary-core drills. Rotary-percussion drills may be used, provided that excessive spalling does not occur. Spalling beyond the limits of the grout retention ring will require modification of the equipment and operation. Depth of dowel hole shall be within a tolerance of ±1/2 inch of the dimension shown on the drawings. On completion of the drilling operation, the dowel hole shall be blown out with oil-free, compressed air. Dowels shall be bonded in the drilled holes using epoxy resin. Epoxy resin shall be injected at the back of the hole before installing the dowel and extruded to the collar during insertion of the dowel so as to completely fill the void around the dowel. Application by buttering the dowel will not be permitted. The dowels shall be held in alignment at the collar of the hole by means of a suitable metal or plastic grout retention ring fitted around the dowel.

e. Sawing of joints. Sawing shall commence, without regard to day or night, as soon as the concrete has hardened sufficiently to permit cutting without chipping, spalling, or tearing and before uncontrolled shrinkage cracking of the pavement occurs and shall continue without interruption until all joints have been sawn. All slurry and debris produced in the sawing of joints shall be removed by vacuuming and washing. Curing compound or system shall be reapplied in the initial saw-cut and maintained for the remaining cure period.

Joints shall be cut in locations as shown on the plans. The initial joint cut shall be a minimum 1/8 inch wide and to the depth shown on the plans. Prior to placement of joint sealant or seals, the top of the joint shall be widened by sawing as shown on the plans.

501-4.11 Finishing. Finishing operations shall be a continuing part of placing operations starting immediately behind the strike-off of the paver. Initial finishing shall be provided by the transverse screed or extrusion plate. The sequence of operations shall be transverse finishing, longitudinal machine floating if used, straightedge finishing, edging of joints, and then texturing. Finishing shall be by the machine method. The hand method shall be used only on isolated areas of odd slab widths or shapes and in the event of a breakdown of the mechanical finishing equipment. Supplemental hand finishing for machine finished pavement shall be kept to an absolute minimum. Any machine finishing operation which requires appreciable hand finishing, other than a moderate amount of straightedge finishing, shall be immediately stopped and proper adjustments made or the equipment replaced. Equipment, mixture, and/or procedures which produce more than 1/4 inch of mortar-rich surface shall be immediately modified as necessary to eliminate this condition or operations shall cease. Compensation shall be made for surging behind the screeds or extrusion plate and settlement during hardening and care shall be taken to ensure that paving and finishing machines are properly adjusted so that the finished surface of the concrete (not just the cutting edges of the screeds) will be at the required line and grade. Finishing equipment and tools shall be maintained clean and in an approved condition. At no time shall water be added to the surface of the slab with the finishing equipment or tools, or in any other way. Fog (mist) sprays or other surface applied finishing aids specified to prevent plastic shrinkage cracking, approved by the RPR, may be used in accordance with the manufacturers requirements.

a. Machine finishing with slipform pavers. The slipform paver shall be operated so that only a very minimum of additional finishing work is required to produce pavement surfaces and edges meeting the specified tolerances. Any equipment or procedure that fails to meet these specified requirements shall immediately be replaced or modified as necessary. A self-propelled non-rotating pipe float may be used while the concrete is still plastic, to remove minor irregularities and score marks. Only one pass of the pipe float shall be allowed. Equipment, mixture, and/or procedures which produce more than 1/4 inch of mortar-rich surface shall be immediately modified as necessary to eliminate this condition or operations shall cease. Remove excessive slurry from the surface with a cutting straightedge and wipe off the edge. Any slurry which does run down the vertical edges shall be immediately removed by hand, using stiff brushes or scrapers. No slurry, concrete or concrete mortar shall be used to build up along the edges of the pavement to compensate for excessive edge slump, either while the concrete is plastic or after it hardens.

b. Machine finishing with fixed forms. The machine shall be designed to straddle the forms and shall be operated to screed and consolidate the concrete. Machines that cause displacement of the forms shall be replaced. The machine shall make only one pass over each area of pavement. If the equipment and procedures do not produce a surface of uniform texture, true to grade, in one pass, the operation shall be immediately stopped and the equipment, mixture, and procedures adjusted as necessary.

c. Other types of finishing equipment. Clary screeds, other rotating tube floats, or bridge deck finishers are not allowed on mainline paving, but may be allowed on irregular or odd-shaped slabs, and near buildings or trench drains, subject to the RPR's approval.

Bridge deck finishers shall have a minimum operating weight of 7500 pounds and shall have a transversely operating carriage containing a knock-down auger and a minimum of two immersion vibrators. Vibrating screeds or pans shall be used only for isolated slabs where hand finishing is permitted as specified, and only where specifically approved.

d. Hand finishing. Hand finishing methods will not be permitted, except under the following conditions: (1) in the event of breakdown of the mechanical equipment, hand methods may be used to finish the concrete already deposited on the grade and (2) in areas of narrow widths or of irregular dimensions where operation of the mechanical equipment is impractical.

e. Straightedge testing and surface correction. After the pavement has been struck off and while the concrete is still plastic, it shall be tested for trueness with a 12-foot finishing straightedge swung from handles capable of spanning at least one-half the width of the slab. The straightedge shall be held in contact with the surface in successive positions parallel to the centerline and the whole area gone over from one side of the slab to the other, as necessary. Advancing shall be in successive stages of not more than one-half the length of the straightedge. Any excess water and laitance in excess of 1/8 inch thick shall be removed from the surface of the pavement and wasted. Any depressions shall be immediately filled with freshly mixed concrete, struck off, consolidated, and refinished. High areas shall be cut down and refinished. Special attention shall be given to assure that the surface across joints meets the smoothness requirements. Straightedge testing and surface corrections shall continue until the entire surface is found to be free from observable departures from the straightedge and until the slab conforms to the required grade and cross-section. The use of long-handled wood floats shall be confined to a minimum; they may be used only in emergencies and in areas not accessible to finishing equipment.

501-4.12 Surface texture. The surface of the pavement shall be finished as designated below for all newly constructed concrete pavements. It is important that the texturing equipment not tear or unduly roughen the pavement surface during the operation. The texture shall be uniform in appearance and approximately 1/16 inch (2 mm) in depth. Any imperfections resulting from the texturing operation shall be corrected to the satisfaction of the RPR.

a. Brush or broom finish. Shall be applied when the water sheen has practically disappeared. The equipment shall operate transversely across the pavement surface.

b. Burlap drag finish. Not used.

c. Artificial turf finish. Not used.

501-4.13 Curing. Immediately after finishing operations are completed and bleed water is gone from the surface, all exposed surfaces of the newly placed concrete shall be cured for a 7-day cure period in accordance with one of the methods below. Failure to provide sufficient cover material of whatever kind the Contractor may elect to use, or lack of water to adequately take care of both curing and other requirements, shall be cause for immediate suspension of concreting operations. The concrete shall not be left exposed for more than 1/2 hour during the curing period.

When a two-saw-cut method is used to construct the contraction joint, the curing compound shall be applied to the saw-cut immediately after the initial cut has been made. The sealant reservoir shall not be sawed until after the curing period has been completed. When the one cut method is used to construct the contraction joint, the joint shall be cured with wet rope, wet rags, or wet blankets. The rags, ropes, or blankets shall be kept moist for the duration of the curing period.

a. Impervious membrane method. Curing with liquid membrane compounds should not occur until bleed and surface moisture has evaporated. All exposed surfaces of the pavement shall be sprayed uniformly with white pigmented curing compound immediately after the finishing of the surface and before the set of the concrete has taken place. The curing compound shall not be applied during rainfall. Curing compound shall be applied by mechanical sprayers under pressure at the rate of one gallon to not more than 150 square feet. The spraying equipment shall be of the fully atomizing type equipped with a tank agitator. At the time of use, the compound shall be in a thoroughly mixed condition with the pigment uniformly dispersed throughout the vehicle. During application, the compound shall be stirred continuously by mechanical means. Hand spraying of odd widths or shapes and concrete surfaces exposed by the removal of forms will be permitted. When hand spraying is approved by the RPR, a double application rate shall be used to ensure coverage. Should the film become damaged from any cause, including sawing operations, within the required curing period, the damaged portions shall be repaired immediately with

additional compound or other approved means. Upon removal of side forms, the sides of the exposed slabs shall be protected immediately to provide a curing treatment equal to that provided for the surface.

b. White burlap-polyethylene sheets. The surface of the pavement shall be entirely covered with the sheeting. The sheeting used shall be such length (or width) that it will extend at least twice the thickness of the pavement beyond the edges of the slab. The sheeting shall be placed so that the entire surface and both edges of the slab are completely covered. The sheeting shall be placed and weighted to remain in contact with the surface covered, and the covering shall be maintained fully saturated and in position for seven (7) days after the concrete has been placed.

~~**c. Water method.** The entire area shall be covered with burlap or other water absorbing material. The material shall be of sufficient thickness to retain water for adequate curing without excessive runoff. The material shall be kept wet at all times and maintained for seven (7) days. When the forms are stripped, the vertical walls shall also be kept moist. It shall be the responsibility of the Contractor to prevent ponding of the curing water on the subbase.~~

d. Concrete protection for cold weather. Maintain the concrete at a temperature of at least 50°F for a period of 72 hours after placing and at a temperature above freezing for the remainder of the 7-day curing period. The Contractor shall be responsible for the quality and strength of the concrete placed during cold weather; and any concrete damaged shall be removed and replaced at the Contractor's expense.

e. Concrete protection for hot weather. Concrete should be continuous moisture cured for the entire curing period and shall commence as soon as the surfaces are finished and continue for at least 24 hours. However, if moisture curing is not practical beyond 24 hours, the concrete surface shall be protected from drying with application of a liquid membrane-forming curing compound while the surfaces are still damp. Other curing methods may be approved by the RPR.

501-4.14 Removing forms. Unless otherwise specified, forms shall not be removed from freshly placed concrete until it has hardened sufficiently to permit removal without chipping, spalling, or tearing. After the forms have been removed, the sides of the slab shall be cured in accordance with paragraph 501-4.13.

If honeycombed areas are evident when the forms are removed, materials, placement, and consolidation methods must be reviewed and appropriate adjustments made to assure adequate consolidation at the edges of future concrete placements. Honeycombed areas that extend into the slab less than approximately 1 inch, shall be repaired with an approved grout, as directed by the RPR. Honeycombed areas that extend into the slab greater than a depth of 1 inch shall be considered as defective work and shall be removed and replaced in accordance with paragraph 501-4.19.

501-4.15 Saw-cut grooving. If shown on the plans, grooved surfaces shall be provided in accordance with the requirements of Item P-621.

501-4.16 Sealing joints. The joints in the pavement shall be sealed in accordance with Item P-604.

501-4.17 Protection of pavement. The Contractor shall protect the pavement and its appurtenances against both public traffic and traffic caused by the Contractor's employees and agents until accepted by the RPR. This shall include watchmen to direct traffic and the erection and maintenance of warning signs, lights, pavement bridges, crossovers, and protection of unsealed joints from intrusion of foreign material, etc. Any damage to the pavement occurring prior to final acceptance shall be repaired or the pavement replaced at the Contractor's expense.

Aggregates, rubble, or other similar construction materials shall not be placed on airfield pavements. Traffic shall be excluded from the new pavement by erecting and maintaining barricades and signs until the concrete is at least seven (7) days old, or for a longer period if directed by the RPR.

In paving intermediate lanes between newly paved pilot lanes, operation of the hauling and paving equipment will be permitted on the new pavement after the pavement has been cured for seven (7) days, the joints are protected, the concrete has attained a minimum field cured flexural strength of 450 psi (3100 kPa), and the slab edge is protected.

All new and existing pavement carrying construction traffic or equipment shall be kept clean and spillage of concrete and other materials shall be cleaned up immediately.

Damaged pavements shall be removed and replaced at the Contractor's expense. Slabs shall be removed to the full depth, width, and length of the slab.

501-4.18 Opening to construction traffic. The pavement shall not be opened to traffic until test specimens molded and cured in accordance with ASTM C31 have attained a flexural strength of 450 pounds per square inch when tested in accordance with ASTM C78. If such tests are not conducted, the pavement shall not be opened to traffic until 14 days after the concrete was placed. Prior to opening the pavement to construction traffic, all joints shall either be sealed or protected from damage to the joint edge and intrusion of foreign materials into the joint. As a minimum, backer rod or tape may be used to protect the joints from foreign matter intrusion.

501-4.19 Repair, removal, or replacement of slabs. New pavement slabs that are broken or contain cracks or are otherwise defective or unacceptable as defined by acceptance criteria in paragraph 501-6.6 shall be removed and replaced or repaired, as directed by the RPR, at the Contractor's expense. Spalls along joints shall be repaired as specified. Removal of partial slabs is not permitted. Removal and replacement shall be full depth, shall be full width of the slab, and the limit of removal shall be normal to the paving lane and to each original transverse joint. The RPR will determine whether cracks extend full depth of the pavement and may require cores to be drilled on the crack to determine depth of cracking. Such cores shall be have a diameter of 2 inches to 4 inches, shall be drilled by the Contractor and shall be filled by the Contractor with a well consolidated concrete mixture bonded to the walls of the hole with a bonding agent, using approved procedures. Drilling of cores and refilling holes shall be at no expense to the Owner. Repair of cracks as described in this section shall not be allowed if in the opinion of the RPR the overall condition of the pavement indicates that such repair is unlikely to achieve an acceptable and durable finished pavement. No repair of cracks shall be allowed in any panel that demonstrates segregated aggregate with an absence of coarse aggregate in the upper 1/8 inch of the pavement surface.

a. Shrinkage cracks. Shrinkage cracks which do not exceed one-third of the pavement depth shall be cleaned and either high molecular weight methacrylate (HMWM) applied; or epoxy resin (Type IV, Grade 1) pressure injected using procedures recommended by the manufacturer and approved by the RPR. Sandblasting of the surface may be required following the application of HMWM to restore skid resistance. Care shall be taken to ensure that the crack is not widened during epoxy resin injection. All epoxy resin injection shall take place in the presence of the RPR. Shrinkage cracks which exceed one-third the pavement depth shall be treated as full depth cracks in accordance with paragraphs 501-4.19b and 501-19c.

b. Slabs with cracks through interior areas. Interior area is defined as that area more than 6 inches from either adjacent original transverse joint. The full slab shall be removed and replaced at no cost to the Owner, when there are any full depth cracks, or cracks greater than one-third the pavement depth, that extend into the interior area.

c. Cracks close to and parallel to joints. All full-depth cracks within 6 inches either side of the joint and essentially parallel to the original joints, shall be treated as follows.

(1) Full depth cracks and original joint not cracked. The full-depth crack shall be treated as the new joint and the original joint filled with an epoxy resin.

i. Full-depth crack. The joint sealant reservoir for the crack shall be formed by sawing to a depth of 3/4 inches, ±1/16 inch, and to a width of 5/8 inch, ±1/8 inch. The crack shall be sawed with equipment specially designed to follow random cracks. Any equipment or procedure which causes raveling or spalling along the crack shall be modified or replaced to prevent raveling or spalling. The joint shall be sealed with sealant in accordance with P-605 or as directed by the RPR.

ii. Original joint. If the original joint sealant reservoir has been sawed out, the reservoir and as much of the lower saw cut as possible shall be filled with epoxy resin, Type IV, Grade 2, thoroughly tooled into the void using approved procedures.

If only the original narrow saw cut has been made, it shall be cleaned and pressure injected with epoxy resin, Type IV, Grade 1, using approved procedures.

Where a parallel crack goes part way across paving lane and then intersects and follows the original joint which is cracked only for the remained of the width, it shall be treated as specified above for a parallel crack, and the cracked original joint shall be prepared and sealed as originally designed.

(2) Full depth cracks and original joint cracked. If there is any place in the lane width where a parallel crack and a cracked portion of the original joint overlap, the entire slab containing the crack shall be removed and replaced.

d. Removal and replacement of full slabs. Make a full depth cut perpendicular to the slab surface along all edges of the slab with a concrete saw cutting any dowels or tie-bars. Remove damaged slab protecting adjacent pavement from damage. Damage to adjacent slabs may result in removal of additional slabs as directed by the RPR at the Contractor's expense.

The underlying material shall be repaired, re-compacted and shaped to grade.

Dowels of the size and spacing specified for other joints in similar pavement on the project shall be installed along all four (4) edges of the new slab in accordance with paragraph 501-4.10d.

Placement of concrete shall be as specified for original construction. The joints around the new slab shall be prepared and sealed as specified for original construction.

e. Spalls along joints.

(1) Spalls less than one inch wide and less than the depth of the joint sealant reservoir, shall be filled with joint sealant material.

(2) Spalls larger than one inch and/or deeper than the joint reservoir, but less than ½ the slab depth, and less than 25% of the length of the adjacent joint shall be repaired as follows:

i. Make a vertical saw cut at least one inch (25 mm) outside the spalled area and to a depth of at least 2 inches (50 mm). Saw cuts shall be straight lines forming rectangular areas surrounding the spalled area.

ii. Remove unsound concrete and at least 1/2 inch (12 mm) of visually sound concrete between the saw cut and the joint or crack with a light chipping hammer.

iii. Clean cavity with high-pressure water jets supplemented with compressed air as needed to remove all loose material.

iv. Apply a prime coat of epoxy resin, Type III, Grade I, to the dry, cleaned surface of all sides and bottom of the cavity, except any joint face.

v. Fill the cavity with low slump concrete or mortar or with epoxy resin concrete or mortar.

vi. An insert or other bond-breaking medium shall be used to prevent bond at all joint faces.

vii. A reservoir for the joint sealant shall be sawed to the dimensions required for other joints, or as required to be routed for cracks. The reservoir shall be thoroughly cleaned and sealed with the sealer specified for the joints.

(3) Spalls deeper than 1/2 of the slab depth or spalls longer than 25% of the adjacent joint require replacement of the entire slab.

f. Diamond grinding of Concrete surfaces. Diamond grinding shall be completed prior to pavement grooving. Diamond grinding of the hardened concrete should not be performed until the concrete is at least 14 days old and has achieved full minimum strength. Equipment that causes ravels, aggregate fractures, spalls or disturbance to the joints will not be permitted. The depth of diamond grinding shall not exceed 1/2 inch and all areas in which diamond grinding has been performed will be subject to the final pavement thickness tolerances specified.

Diamond grinding shall be performed with a machine specifically designed for diamond grinding capable of cutting a path at least 3 feet wide. The saw blades shall be 1/8-inch wide with sufficient number of flush cut blades that create grooves between 0.090 and 0.130 inches wide; and peaks and ridges

approximately 1/32 inch higher than the bottom of the grinding cut. The Contractor shall determine the number and type of blades based on the hardness of the aggregate. Contractor shall demonstrate to the RPR that the grinding equipment will produce satisfactory results prior to making corrections to surfaces.

Grinding will be tapered in all directions to provide smooth transitions to areas not requiring grinding. The slurry resulting from the grinding operation shall be continuously removed and the pavement left in a clean condition. All grinding shall be at the expense of the Contractor.

CONTRACTOR QUALITY CONTROL (CQC)

501-5.1 Quality control program. The Contractor shall develop a Quality Control Program in accordance with Item C-100. No partial payment will be made for materials that are subject to specific quality control requirements without an approved quality control program.

501-5.2 Contractor Quality Control (CQC). The Contractor shall provide or contract for testing facilities in accordance with Item C-100. The RPR shall be permitted unrestricted access to inspect the Contractor's QC facilities and witness QC activities. The RPR will advise the Contractor in writing of any noted deficiencies concerning the QC facility, equipment, supplies, or testing personnel and procedures. When the deficiencies are serious enough to be adversely affecting the test results, the incorporation of the materials into the work shall be suspended immediately and will not be permitted to resume until the deficiencies are satisfactorily corrected.

501-5.3 Contractor QC testing. The Contractor shall perform all QC tests necessary to control the production and construction processes applicable to this specification and as set forth in the CQCP. The testing program shall include, but not necessarily be limited to, tests for aggregate gradation, aggregate moisture content, slump, and air content. A QC Testing Plan shall be developed and approved by the RPR as part of the CQCP.

The RPR may at any time, notwithstanding previous plant acceptance, reject and require the Contractor to dispose of any batch of concrete mixture which is rendered unfit for use due to contamination, segregation, or improper slump. Such rejection may be based on only visual inspection. In the event of such rejection, the Contractor may take a representative sample of the rejected material in the presence of the RPR, and if it can be demonstrated in the laboratory, in the presence of the RPR, that such material was erroneously rejected, payment will be made for the material at the contract unit price.

a. Fine aggregate.

(1) Gradation. A sieve analysis shall be made at least twice daily in accordance with ASTM C136 from randomly sampled material taken from the discharge gate of storage bins or from the conveyor belt.

(2) Moisture content. If an electric moisture meter is used, at least two direct measurements of moisture content shall be made per week to check the calibration. If direct measurements are made in lieu of using an electric meter, two tests shall be made per day. Tests shall be made in accordance with ASTM C70 or ASTM C566.

(3) Deleterious substances. Fine aggregate as delivered to the mixer shall be tested for deleterious substances in fine aggregate for concrete as specified in paragraph 501-2.1b, prior to production of the control strip, and a minimum of every 30-days during production or more frequently as necessary to control deleterious substances.

b. Coarse Aggregate.

(1) Gradation. A sieve analysis shall be made at least twice daily for each size of aggregate. Tests shall be made in accordance with ASTM C136 from randomly sampled material taken from the discharge gate of storage bins or from the conveyor belt.

(2) Moisture content. If an electric moisture meter is used, at least two direct measurements of moisture content shall be made per week to check the calibration. If direct measurements are made in lieu of using an electric meter, two tests shall be made per day. Tests shall be made in accordance with ASTM C566.

(3) Deleterious substances. Coarse aggregate as delivered to the mixer shall be tested for deleterious substances in coarse aggregate for concrete as specified in paragraph 501-2.1c, prior to production of the control strip, and a minimum of every 30-days during production or more frequently as necessary to control deleterious substances.

c. Slump. One test shall be made for each sublot. Slump tests shall be performed in accordance with ASTM C143 from material randomly sampled from material discharged from trucks at the paving site. Material samples shall be taken in accordance with ASTM C172.

d. Air content. One test shall be made for each sublot. Air content tests shall be performed in accordance with ASTM C231 for gravel and stone coarse aggregate and ASTM C173 for slag or other porous coarse aggregate, from material randomly sampled from trucks at the paving site. Material samples shall be taken in accordance with ASTM C172.

e. Unit weight and Yield. One test shall be made for each sublot. Unit weight and yield tests shall be in accordance with ASTM C138. The samples shall be taken in accordance with ASTM C172 and at the same time as the air content tests.

f. Temperatures. Temperatures shall be checked at least four times per lot at the job site in accordance with ASTM C1064.

g. Smoothness for Contractor Quality Control.

The Contractor shall perform smoothness testing in transverse and longitudinal directions daily to verify that the construction processes are producing pavement with variances less than ¼ inch in 12 feet, identifying areas that may pond water which could lead to hydroplaning of aircraft. If the smoothness criteria is not met, appropriate changes and corrections to the construction process shall be made by the Contractor before construction continues

The Contractor may use a 12-foot straightedge, a rolling inclinometer meeting the requirements of ASTM E2133, or rolling external reference device that can simulate a 12-foot straightedge approved by the RPR. Straight-edge testing shall start with one-half the length of the straightedge at the edge of pavement section being tested and then moved ahead one-half the length of the straightedge for each successive measurement. Testing shall be continuous across all joints. The surface irregularity shall be determined by placing the freestanding (unleveled) straightedge on the pavement surface and allowing it to rest upon the two highest spots covered by its length, and measuring the maximum gap between the straightedge and the pavement surface in the area between the two high points. If the rolling inclinometer or external reference device is used, the data may be evaluated using either the FAA profile program, ProFAA, or FHWA profile program ProVal, using the 12-foot straightedge simulation function.

Smoothness readings shall not be made across grade changes or cross slope transitions. The transition between new and existing pavement shall be evaluated separately for conformance with the plans.

(1) Transverse measurements. Transverse measurements shall be taken for each day's production placed. Transverse measurements shall be taken perpendicular to the pavement centerline each 50 feet or more often as determined by the RPR. The joint between lanes shall be tested separately to facilitate smoothness between lanes.

(2) Longitudinal measurements. Longitudinal measurements shall be taken for each day's production placed. Longitudinal tests shall be parallel to the centerline of paving; at the center of paving lanes when widths of paving lanes are less than 20 feet; and at the third points of paving lanes when widths of paving lanes are 20 ft or greater. When placement abuts previously placed material the first measurement shall start with one half the length of the straight edge on the previously placed material.

Deviations on the final surface course in either the transverse or longitudinal direction that will trap water greater than 1/4 inch shall be corrected with diamond grinding per paragraph 501-4.19f or by removing and replacing the surface course to full depth. Grinding shall be tapered in all directions to provide smooth transitions to areas not requiring grinding. All areas in which diamond grinding has been performed shall be subject to the final pavement thickness tolerances specified in paragraph 501-6.6.

Control charts shall be kept to show area of each day's placement and the percentage of corrective grinding required. Corrections to production and placement shall be initiated when corrective grinding is required. If the Contractor's machines and/or methods produce significant areas that need corrective actions in excess of 10 percent of a day's production, production shall be stopped until corrective measures are implemented by the Contractor.

h. Grade. Grade will be evaluated prior to and after placement of the concrete surface.

Measurements will be taken at appropriate gradelines (as a minimum at center and edges of paving lane) and longitudinal spacing as shown on cross-sections and plans. The final surface of the pavement will not vary from the gradeline elevations and cross-sections shown on the plans by more than 1/2 inch vertically and 0.1 feet laterally. The documentation will be provided by the Contractor to the RPR within 48 hours.

Areas with humps or depression that that exceed grade or smoothness and that retain water on the surface must be ground off provided the course thickness after grinding is not more than 1/2 inch less than the thickness specified on the plans. If these areas cannot be corrected with grinding then the slabs that are retaining water must be removed and replaced in accordance with paragraph 501-4.19d. Grinding shall be in accordance with paragraph 501-4.19f. All corrections will be at the Contractors expense.

501-5.4 Control charts. The Contractor shall maintain linear control charts for fine and coarse aggregate gradation, slump, and air content. The Contractor shall also maintain a control chart plotting the coarseness factor/workability factor from the combined gradations in accordance with paragraph 501-2.1d.

Control charts shall be posted in a location satisfactory to the RPR and shall be kept up to date at all times. As a minimum, the control charts shall identify the project number, the contract item number, the test number, each test parameter, the Action and suspension Limits, or Specification limits, applicable to each test parameter, and the Contractor's test results. The Contractor shall use the control charts as part of a process control system for identifying potential problems and assignable causes before they occur. If the Contractor's projected data during production indicates a potential problem and the Contractor is not taking satisfactory corrective action, the RPR may halt production or acceptance of the material.

a. Fine and coarse aggregate gradation. The Contractor shall record the running average of the last five gradation tests for each control sieve on linear control charts. Superimposed on the control charts shall be the action and suspension limits. Gradation tests shall be performed by the Contractor per ASTM C136. The Contractor shall take at least two samples per lot to check the final gradation. Sampling shall be per ASTM D75 from the flowing aggregate stream or conveyor belt.

b. Slump and air content. The Contractor shall maintain linear control charts both for individual measurements and range (that is, difference between highest and lowest measurements) for slump and air content in accordance with the following Action and Suspension Limits.

c. Combined gradation. The Contractor shall maintain a control chart plotting the coarseness factor and workability factor on a chart in accordance with paragraph 501-2.1d.

Control Chart Limits[1]

Control Parameter	Individual Measurements	
	Action Limit	Suspension Limit
Gradation[2]	*[3]	*[3]
Coarseness Factor (CF)	±3.5	±5
Workability Factor (WF)	±2	±3
Slump	+0.5 to -1 inch (+13 to -25 mm)	+1 to -1.5 inch (+25 to -38 mm)
Air Content	±1.5%	±2.0%

[1] Control charts shall developed and maintained for each control parameter indicated.

[2] Control charts shall be developed and maintained for each sieve size.

[3] Action and suspension limits shall be determined by the Contractor.

501-5.5 Corrective action at Suspension Limit. The CQCP shall indicate that appropriate action shall be taken when the process is believed to be out of control. The CQCP shall detail what action will be taken to bring the process into control and shall contain sets of rules to gauge when a process is out of control. As a minimum, a process shall be deemed out of control and corrective action taken if any one of the following conditions exists.

a. Fine and coarse aggregate gradation. When two consecutive averages of five tests are outside of the suspension limits, immediate steps, including a halt to production, shall be taken to correct the grading.

b. Coarseness and Workability factor. When the CF or WF reaches the applicable suspension limits, the Contractor, immediate steps, including a halt to production, shall be taken to correct the CF and WF.

c. Fine and coarse aggregate moisture content. Whenever the moisture content of the fine or coarse aggregate changes by more than 0.5%, the scale settings for the aggregate batcher and water batcher shall be adjusted.

d. Slump. The Contractor shall halt production and make appropriate adjustments whenever:

(1) one point falls outside the Suspension Limit line for individual measurements

OR

(2) two points in a row fall outside the Action Limit line for individual measurements.

e. Air content. The Contractor shall halt production and adjust the amount of air-entraining admixture whenever:

(1) one point falls outside the Suspension Limit line for individual measurements

OR

(2) two points in a row fall outside the Action Limit line for individual measurements.

MATERIAL ACCEPTANCE

501-6.1 Quality Assurance (QA) Acceptance sampling and testing. All acceptance sampling and testing necessary to determine conformance with the requirements specified in this section, with the exception of coring for thickness determination, will be performed by the RPR. The Contractor shall provide adequate facilities for the initial curing of beams. The Contractor shall bear the cost of providing initial curing facilities and coring and filling operations, per paragraph 501-6.5b(1).

The samples will be transported while in the molds. The curing, except for the initial cure period, will be accomplished using the immersion in saturated lime water method. During the 24 hours after molding, the temperature immediately adjacent to the specimens must be maintained in the range of 60° to 80°F, and loss of moisture from the specimens must be prevented. The specimens may be stored in tightly constructed wooden boxes, damp sand pits, temporary buildings at construction sites, under wet burlap in favorable weather, or in heavyweight closed plastic bags, or using other suitable methods, provided the temperature and moisture loss requirements are met.

501-6.2 Quality Assurance (QA) testing laboratory. Quality assurance testing organizations performing these acceptance tests will be accredited in accordance with ASTM C1077. The quality assurance laboratory accreditation must be current and listed on the accrediting authority's website. All test methods required for acceptance sampling and testing must be listed on the lab accreditation. A copy of the laboratory's current accreditation and accredited test methods will be submitted to the RPR prior to start of construction.

501-6.3 Lot size. Concrete will be accepted for strength and thickness on a lot basis. A lot will consist of a day's production not to exceed 10,000 square yards. Each lot will be divided into approximately equal sublots with individual sublots between 2,000 and 3,000 square yards. Where three sublots are produced, they will constitute a lot. Where one or two sublots are produced, they will be incorporated into the previous or next lot. Where more than one plant is simultaneously producing concrete for the job, the lot sizes will apply separately for each plant.

501-6.4 Partial lots. When operational conditions cause a lot to be terminated before the specified number of tests have been made for the lot or for overages or minor placements to be considered as partial lots, the following procedure will be used to adjust the lot size and the number of tests for the lot.

Where three sublots have been produced, they will constitute a lot. Where one or two sublots have been produced, they will be incorporated into the next lot or the previous lot and the total number of sublots will be used in the acceptance criteria calculation, that is, n=5 or n=6.

501-6.5 Acceptance Sampling and Testing.

a. Strength.

(1) Sampling. One sample will be taken for each sublot from the concrete delivered to the job site. Sampling locations will be determined by the RPR in accordance with random sampling procedures contained in ASTM D3665. The concrete will be sampled in accordance with ASTM C172.

(2) Test Specimens. The RPR will be responsible for the casting, initial curing, transportation, and curing of specimens in accordance with ASTM C31. Two (2) specimens will be made from each sample and slump, air content, unit weight, and temperature tests will be conducted for each set of strength specimens. Within 24 to 48 hours, the samples will be transported from the field to the laboratory while in the molds. Samples will be cured in saturated lime water.

The strength of each specimen will be determined in accordance with ASTM C78. The strength for each sublot will be computed by averaging the results of the two test specimens representing that sublot.

(3) Acceptance. Acceptance of pavement for strength will be determined by the RPR in accordance with paragraph 501-6.6b(1). All individual strength tests within a lot will be checked for outliers in accordance with ASTM E178, at a significance level of 5%. Outliers will be discarded and the remaining test values will be used to determine acceptance in accordance with paragraph 501-6.5b.

b. Pavement thickness.

(1) Sampling. One core will be taken by the Contractor for each sublot in the presence of the RPR. Sampling locations will be determined by the RPR in accordance with random sampling procedures contained in ASTM D3665. Areas, such as thickened edges, with planned variable thickness, will be excluded from sample locations.

Cores shall be a minimum 4 inch in diameter neatly cut with a core drill. The Contractor will furnish all tools, labor, and materials for cutting samples and filling the cored hole. Core holes will be filled by the Contractor with a non-shrink grout approved by the RPR within one day after sampling.

(2) Testing. The thickness of the cores will be determined by the RPR by the average caliper measurement in accordance with ASTM C174. Each core shall be photographed and the photograph included with the test report.

(3) Acceptance. Acceptance of pavement for thickness will be determined by the RPR in accordance with paragraph 501-6.6.

501-6.6 Acceptance criteria.

a. General. Acceptance will be based on the following characteristics of the completed pavement discussed in paragraph 501-6.5b:

(1) Strength

(2) Thickness

(3) Grade

(4) Profilograph smoothness – Not used.

(5) Adjustments for repairs

Acceptance for strength, thickness, and grade, will be based on the criteria contained in accordance with paragraph 501-6.6b(1), 501-6.6b(2), and 501-6.6b(3), respectively. Acceptance for profilograph smoothness will be based on the criteria contained in paragraph 501-6.6b(4).

Production quality must achieve 90 PWL or higher to receive full payment.

Strength and thickness will be evaluated for acceptance on a lot basis using the method of estimating PWL. Production quality must achieve 90 PWL or higher to receive full pavement. The PWL will be determined in accordance with procedures specified in Item C-110.

The lower specification tolerance limit (L) for strength and thickness will be:

Lower Specification Tolerance Limit (L)

Strength	0.93 × strength specified in paragraph 501-3.3
Thickness	Lot Plan Thickness in inches, - 0.50 in

b. Acceptance criteria.

(1) Strength. If the PWL of the lot equals or exceeds 90%, the lot will be acceptable. Acceptance and payment for the lot will be determined in accordance with paragraph 501-8.1.

(2) Thickness. If the PWL of the lot equals or exceeds 90%, the lot will be acceptable. Acceptance and payment for the lot will be determined in accordance with paragraph 501-8.1.

(3) Grade. The final finished surface of the pavement of the completed project will not vary from the gradeline elevations and cross-sections shown on the plans by more than 1/2 inch vertically or 0.1 feet laterally. The documentation, stamped and signed by a licensed surveyor shall be in accordance with paragraph 501-5.3h. Payment for sublots that do not meet grade for over 25% of the sublot shall reduced by 5% and not be more than 95%.

(4) Profilograph roughness for QA Acceptance. Not used.

(5) Adjustments for repair. Sublots with spall repairs, crack repairs, or partial panel replacement, will be limited to no more than 95% payment.

(6) Adjustment for grinding. For sublots with grinding over 25% of a sublot, payment will be reduced 5%.

METHOD OF MEASUREMENT

501-7.1 Concrete pavement shall be measured by the number of square yards of plain or reinforced pavement as specified in-place, completed and accepted.

BASIS OF PAYMENT

501-8.1 Payment. Payment for concrete pavement meeting all acceptance criteria as specified in paragraph 501-6.6. Acceptance Criteria shall be based on results of strength and thickness tests. Payment for acceptable lots of concrete pavement shall be adjusted in accordance with paragraph 501-8.1a for strength and thickness; 501-8.1b for repairs; 501-8.1c for grinding; and 501-8.1d for smoothness, subject to the limitation that:

The total project payment for concrete pavement shall not exceed 100% percent of the product of the contract unit price and the total number of square yards of concrete pavement used in the accepted work (See Note 1 under the Price Adjustment Schedule table below).

Payment shall be full compensation for all labor, materials, tools, equipment, and incidentals required to complete the work as specified herein and on the drawings.

a. Basis of adjusted payment. The pay factor for each individual lot shall be calculated in accordance with the Price Adjustment Schedule table below. A pay factor shall be calculated for both strength and thickness. The lot pay factor shall be the higher of the two values when calculations for both strength and thickness are 100% or higher. The lot pay factor shall be the product of the two values when only one of the calculations for either strength or thickness is 100% or higher. The lot pay factor shall be the lower of the two values when calculations for both strength and thickness are less than 100%.

Price Adjustment Schedule[1]

Percentage of Materials Within Specification Limits (PWL)	Lot Pay Factor (Percent of Contract Unit Price)
96 – 100	106
90 – 95	PWL + 10
75 – 90	0.5 PWL + 55
55 – 74	1.4 PWL – 12
Below 55	Reject[2]

[1] Although it is theoretically possible to achieve a pay factor of 106% for each lot, actual payment in excess of 100% shall be subject to the total project payment limitation specified in paragraph 501-8.1.

[2] The lot shall be removed and replaced unless, after receipt of FAA concurrence, the Owner and Contractor agree in writing that the lot will remain; the lot paid at 50% of the contract unit price; and the total project payment limitation reduced by the amount withheld for that lot.

For each lot accepted, the adjusted contract unit price shall be the product of the lot pay factor for the lot and the contract unit price. Payment shall be subject to the total project payment limitation specified in paragraph 501-8.1. Payment in excess of 100% for accepted lots of concrete pavement shall be used to offset payment for accepted lots of concrete pavement that achieve a lot pay factor less than 100%; except for rejected lots which remain in place and/or sublots with adjustments for repairs.

b. Adjusted payment for repairs. The PWL lot pay factor shall be reduced by 5% and be no higher than 95% for sublots which contain repairs in accordance with paragraph 501-4.19 on more than 20% of the slabs within the sublot. Payment factors greater than 100 percent for the strength and thickness cannot be used to offset adjustments for repairs.

c. Adjusted payment for grinding. The PWL lot pay factor shall be reduced by 5% and be no higher than 95% for sublots with grinding over 25% of a sublot.

d. Profilograph Roughness. Not used.

e. Payment. Payment shall be made under:

Item P-501-8.1 7" Concrete Pavement – per square yard

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM International (ASTM)

ASTM A184	Standard Specification for Welded Deformed Steel Bar Mats for Concrete Reinforcement
ASTM A615	Standard Specification for Deformed and Plain Carbon-Steel Bars for Concrete Reinforcement
ASTM A704	Standard Specification for Welded Steel Plain Bar or Rod Mats for Concrete Reinforcement
ASTM A706	Standard Specification for Low-Alloy Steel Deformed and Plain Bars for Concrete Reinforcement
ASTM A775	Standard Specification for Epoxy-Coated Steel Reinforcing Bars
ASTM A884	Standard Specification for Epoxy-Coated Steel Wire and Welded Wire Reinforcement
ASTM A934	Standard Specification for Epoxy-Coated Prefabricated Steel Reinforcing Bars
ASTM A996	Standard Specification for Rail-Steel and Axle-Steel Deformed Bars for Concrete Reinforcement
ASTM A1035	Standard Specification for Deformed and Plain, Low-Carbon, Chromium, Steel Bars for Concrete Reinforcement
ASTM A1064	Standard Specification for Carbon-Steel Wire and Welded Wire Reinforcement, Plain and Deformed, for Concrete
ASTM A1078	Standard Specification for Epoxy-Coated Steel Dowels for Concrete Pavement
ASTM C29	Standard Test Method for Bulk Density ("Unit Weight") and Voids in Aggregate
ASTM C31	Standard Practice for Making and Curing Concrete Test Specimens in the Field
ASTM C33	Standard Specification for Concrete Aggregates
ASTM C39	Standard Test Method for Compressive Strength of Cylindrical Concrete Specimens
ASTM C70	Standard Test Method for Surface Moisture in Fine Aggregate
ASTM C78	Standard Test Method for Flexural Strength of Concrete (Using Simple Beam with Third-Point Loading)
ASTM C88	Standard Test Method for Soundness of Aggregates by Use of Sodium Sulfate or Magnesium Sulfate
ASTM C94	Standard Specification for Ready-Mixed Concrete

ASTM C114	Standard Test Methods for Chemical Analysis of Hydraulic Cement
ASTM C117	Standard Test Method for Materials Finer than 75-µm (No. 200) Sieve in Mineral Aggregates by Washing
ASTM C123	Standard Test Method for Lightweight Particles in Aggregate
ASTM C136	Standard Test Method for Sieve Analysis of Fine and Coarse Aggregates
ASTM C131	Standard Test Method for Resistance to Degradation of Small-Size Coarse Aggregate by Abrasion and Impact in the Los Angeles Machine
ASTM C136	Standard Test Method for Sieve or Screen Analysis of Fine and Coarse Aggregates
ASTM C138	Standard Test Method for Density (Unit Weight), Yield, and Air Content (Gravimetric) of Concrete
ASTM C142	Standard Test Method for Clay Lumps and Friable Particles in Aggregates
ASTM C143	Standard Test Method for Slump of Hydraulic-Cement Concrete
ASTM C150	Standard Specification for Portland Cement
ASTM C171	Standard Specification for Sheet Materials for Curing Concrete
ASTM C172	Standard Practice for Sampling Freshly Mixed Concrete
ASTM C173	Standard Test Method for Air Content of Freshly Mixed Concrete by the Volumetric Method
ASTM C174	Standard Test Method for Measuring Thickness of Concrete Elements Using Drilled Concrete Cores
ASTM C227	Standard Test Method for Potential Alkali Reactivity of Cement-Aggregate Combinations (Mortar-Bar Method)
ASTM C231	Standard Test Method for Air Content of Freshly Mixed Concrete by the Pressure Method
ASTM C260	Standard Specification for Air-Entraining Admixtures for Concrete
ASTM C295	Standard Guide for Petrographic Examination of Aggregates for Concrete
ASTM C309	Standard Specification for Liquid Membrane-Forming Compounds for Curing Concrete
ASTM C311	Standard Test Methods for Sampling and Testing Fly Ash or Natural Pozzolans for Use in Portland Cement Concrete
ASTM C494	Standard Specification for Chemical Admixtures for Concrete
ASTM C566	Standard Test Method for Total Evaporable Moisture Content of Aggregates by Drying
ASTM C595	Standard Specification for Blended Hydraulic Cements
ASTM C618	Standard Specification for Coal Fly Ash and Raw or Calcined Natural Pozzolan for Use in Concrete
ASTM C642	Standard Test Method for Density, Absorption, and Voids in Hardened Concrete

ASTM C666	Standard Test Method for Resistance of Concrete to Rapid Freezing and Thawing
ASTM C685	Standard Specification for Concrete Made by Volumetric Batching and Continuous Mixing
ASTM C881	Standard Specification for Epoxy-Resin-Base Bonding Systems for Concrete
ASTM C989	Standard Specification for Slag Cement for Use in Concrete and Mortars
ASTM C1017	Standard Specification for Chemical Admixtures for Use in Producing Flowing Concrete
ASTM C1064	Test Method for Temperature of Freshly Mixed Hydraulic-Cement Concrete
ASTM C1077	Standard Practice for Agencies Testing Concrete and Concrete Aggregates for Use in Construction and Criteria for Testing Agency Evaluation
ASTM C1157	Standard Performance Specification for Hydraulic Cement
ASTM C1260	Standard Test Method for Potential Alkali Reactivity of Aggregates (Mortar-Bar Method)
ASTM C1365	Standard Test Method for Determination of the Proportion of Phases in Portland Cement and Portland-Cement Clinker Using X-Ray Powder Diffraction Analysis
ASTM C1567	Standard Test Method for Determining the Potential Alkali-Silica Reactivity of Combinations of Cementitious Materials and Aggregate (Accelerated Mortar-Bar Method)
ASTM C1602	Standard Specification for Mixing Water Used in the Production of Hydraulic Cement Concrete
ASTM D75	Standard Practice for Sampling Aggregates
ASTM D1751	Standard Specification for Preformed Expansion Joint Filler for Concrete Paving and Structural Construction (Nonextruding and Resilient Bituminous Types)
ASTM D1752	Standard Specification for Preformed Sponge Rubber and Cork and Recycled PVC Expansion Joint Fillers for Concrete Paving and Structural Construction
ASTM D2419	Standard Test Method for Sand Equivalent Value of Soils and Fine Aggregate
ASTM D3665	Standard Practice for Random Sampling of Construction Materials
ASTM D4791	Standard Test Method for Flat Particles, Elongated Particles, or Flat and Elongated Particles in Coarse Aggregate
ASTM E178	Standard Practice for Dealing with Outlying Observations
ASTM E1274	Standard Test Method for Measuring Pavement Roughness Using a Profilograph
ASTM E2133	Standard Test Method for Using a Rolling Inclinometer to Measure Longitudinal and Transverse Profiles of a Traveled Surface

American Concrete Institute (ACI)

ACI 305R	Guide to Hot Weather Concreting
ACI 306R	Guide to Cold Weather Concreting
ACI 309R	Guide for Consolidation of Concrete

Advisory Circulars (AC)

AC 150/5320-6	Airport Pavement Design and Evaluation

Federal Highway Administration (FHWA)

HIPERPAV 3, version 3.2

Portland Concrete Association (PCA)

PCA	Design and Control of Concrete Mixtures, 16th Edition

U.S. Army Corps of Engineers (USACE) Concrete Research Division (CRD)

CRD C662	Determining the Potential Alkali-Silica Reactivity of Combinations of Cementitious Materials, Lithium Nitrate Admixture and Aggregate (Accelerated Mortar-Bar Method)

United States Air Force Engineering Technical Letter (ETL)

ETL 97-5	Proportioning Concrete Mixtures with Graded Aggregates for Rigid Airfield Pavements

END ITEM P-501

ITEM P-602 EMULSIFIED ASPHALT PRIME COAT

DESCRIPTION

602-1.1 This item shall consist of an application of emulsified asphalt material on the prepared base course in accordance with these specifications and in reasonably close conformity to the lines shown on the plans.

MATERIALS

602-2.1 Emulsified Asphalt material. The emulsified asphalt material shall be as specified in ASTM D3628 for use as a prime coat appropriate to local conditions. The Contractor shall provide a copy of the manufacturer's Certificate of Analysis (COA) for the emulsified asphalt material. The COA shall be provided to and approved by the Resident Project Representative (RPR) before the emulsified asphalt material is applied. The furnishing of the COA for the emulsified asphalt material shall not be interpreted as a basis for final acceptance. The manufacturer's COA may be subject to verification by testing the material delivered for use on the project.

CONSTRUCTION METHODS

602-3.1 Weather limitations. The emulsified asphalt prime coat shall be applied only when the existing surface is dry; the atmospheric temperature is 50°F or above, and the temperature has not been below 35°F for the 12 hours prior to application; and when the weather is not foggy or rainy. The temperature requirements may be waived when directed by the RPR.

602-3.2 Equipment. The equipment shall include a self-powered pressure asphalt material distributor and equipment for heating asphalt material.

Provide a distributor with pneumatic tires of such size and number that the load produced on the base surface does not exceed 65.0 psi of tire width to prevent rutting, shoving or otherwise damaging the base, surface or other layers in the pavement structure. Design and equip the distributor to spray the asphalt material in a uniform coverage at the specified temperature, at readily determined and controlled rates from 0.05 to 1.0 gallons per square yard, with a pressure range of 25 to 75 psi and with an allowable variation from the specified rate of not more than ±5%, and at variable widths. Include with the distributor equipment a separate power unit for the bitumen pump, full-circulation spray bars, tachometer, pressure gauges, volume-measuring devices, adequate heaters for heating of materials to the proper application temperature, a thermometer for reading the temperature of tank contents, and a hand hose attachment suitable for applying asphalt material manually to areas inaccessible to the distributor. Equip the distributor to circulate and agitate the asphalt material during the heating process. If the distributor is not equipped with an operable quick shutoff valve, the prime operations shall be started and stopped on building paper.

A power broom and power blower suitable for cleaning the surfaces to which the asphalt coat is to be applied shall be provided.

Asphalt distributors must be calibrated annually in accordance with ASTM D2995. The Contractor must furnish a current calibration certification for the asphalt distributor truck from any State or other agency as approved by the RPR.

602-3.3 Application of emulsified asphalt material. Immediately before applying the prime coat, the full width of the surface to be primed shall be swept with a power broom to remove all loose dirt and other objectionable material.

The asphalt emulsion material shall be uniformly applied with an asphalt distributor at the rate of 0.15 to 0.30 gallons per square yard depending on the base course surface texture. The type of asphalt material and application rate shall be approved by the RPR prior to application.

Following application of the emulsified asphalt material and prior to application of the succeeding layer of pavement, allow the asphalt coat to cure and to obtain evaporation of any volatiles or moisture. Maintain the coated surface until the succeeding layer of pavement is placed, by protecting the surface against damage and by repairing and recoating deficient areas. Allow the prime coat to cure without being disturbed

for a period of at least 48 hours or longer, as may be necessary to attain penetration into the treated course. Furnish and spread sand to effectively blot up and cure excess asphalt material. The Contractor shall remove blotting sand prior to asphalt concrete lay down operations at no additional expense to the Owner. Keep traffic off surfaces freshly treated with asphalt material. Provide sufficient warning signs and barricades so that traffic will not travel over freshly treated surfaces.

602-3.4 Trial application rates. The Contractor shall apply a minimum of three lengths of at least 100 feet for the full width of the distributor bar to evaluate the amount of emulsified asphalt material that can be satisfactorily applied with the equipment. Apply three different application rates of emulsified asphalt materials within the application range specified in paragraph 602-3.3. Other trial applications can be made using various amounts of material as directed by the RPR. The trial application is to demonstrate the equipment can uniformly apply the emulsified asphalt material within the rates specified and determine the application rate for the project.

602-3.5 Freight and waybills. The Contractor shall submit waybills and delivery tickets during the progress of the work. Before the final estimate is allowed, file with the RPR certified waybills and certified delivery tickets for all emulsified asphalt materials used in the construction of the pavement covered by the contract. Do not remove emulsified asphalt material from storage until the initial outage and temperature measurements have been taken. The delivery or storage units will not be released until the final outage has been taken.

METHOD OF MEASUREMENT

~~**602-4.1** The emulsified asphalt material for prime coat shall be measured by the [gallon] [ton]. Volume shall be corrected to the volume at 60°F (16°C) in accordance with ASTM D4311. The emulsified asphalt material paid for will be the measured quantities used in the accepted work, provided that the measured quantities are not 10% over the specified application rate. Any amount of emulsified asphalt material more than 10% over the specified application rate for each application will be deducted from the measured quantities, except for irregular areas where hand spraying of the emulsified asphalt material is necessary. Water added to emulsified asphalt will not be measured for payment.~~

602-4.1 *The emulsified asphalt material for prime coat shall not be measured for separate payment.*

BASIS OF PAYMENT

~~**602-5.1** Payment shall be made at the contract unit price per [gallon] [ton] for emulsified asphalt prime coat. This price shall be full compensation for furnishing all materials and for all preparation, delivering, and applying the materials, and for all labor, equipment, tools, and incidentals necessary to complete this item.~~

~~Payment will be made under:~~

~~Item P-602-5.1 Emulsified Asphalt Prime Coat - per [gallon] [ton]~~

602-5.1 *The bituminous material for prime coat shall not be paid for separately but shall be considered subsidiary to asphalt paving items.*

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM International (ASTM)

ASTM D2995	Standard Practice for Estimating Application Rate and Residual Application Rate of Bituminous Distributors
ASTM D3628	Standard Practice for Selection and Use of Emulsified Asphalts

END OF ITEM P-602

ITEM P-603 EMULSIFIED ASPHALT TACK COAT

DESCRIPTION

603-1.1 This item shall consist of preparing and treating an asphalt or concrete surface with asphalt material in accordance with these specifications and in reasonably close conformity to the lines shown on the plans.

MATERIALS

603-2.1 Asphalt materials. The asphalt material shall be an emulsified asphalt as specified in ASTM D3628 as an asphalt application for tack coat appropriate to local conditions. The emulsified asphalt shall not be diluted. The Contractor shall provide a copy of the manufacturer's Certificate of Analysis (COA) for the asphalt material to the Resident Project Representative (RPR) before the asphalt material is applied for review and acceptance. The furnishing of COA for the asphalt material shall not be interpreted as a basis for final acceptance. The manufacturer's COA may be subject to verification by testing the material delivered for use on the project.

CONSTRUCTION METHODS

603-3.1 Weather limitations. The tack coat shall be applied only when the existing surface is dry and the atmospheric temperature is 50°F or above; the temperature has not been below 35°F for the 12 hours prior to application; and when the weather is not foggy or rainy. The temperature requirements may be waived when directed by the RPR.

603-3.2 Equipment. The Contractor shall provide equipment for heating and applying the emulsified asphalt material. The emulsion shall be applied with a manufacturer-approved computer rate-controlled asphalt distributor. The equipment shall be in good working order and contain no contaminants or diluents in the tank. Spray bar tips must be clean, free of burrs, and of a size to maintain an even distribution of the emulsion. Any type of tip or pressure source is suitable that will maintain predetermined flow rates and constant pressure during the application process with application speeds under eight (8) miles per hour or seven hundred (700) feet per minute.

The equipment will be tested under pressure for leaks and to ensure proper set-up before use to verify truck set-up (via a test-shot area), including but not limited to, nozzle tip size appropriate for application, spray-bar height and pressure and pump speed, evidence of triple-overlap spray pattern, lack of leaks, and any other factors relevant to ensure the truck is in good working order before use.

The distributor truck shall be equipped with a minimum 12-foot spreader spray bar with individual nozzle control with computer-controlled application rates. The distributor truck shall have an easily accessible thermometer that constantly monitors the temperature of the emulsion, and have an operable mechanical tank gauge that can be used to cross-check the computer accuracy. If the distributor is not equipped with an operable quick shutoff valve, the prime operations shall be started and stopped on building paper.

The distributor truck shall be equipped to effectively heat and mix the material to the required temperature prior to application as required. Heating and mixing shall be done in accordance with the manufacturer's recommendations. Do not overheat or over mix the material.

The distributor shall be equipped with a hand sprayer.

Asphalt distributors must be calibrated annually in accordance with ASTM D2995. The Contractor must furnish a current calibration certification for the asphalt distributor truck from any State or other agency as approved by the RPR.

A power broom and/or power blower suitable for cleaning the surfaces to which the asphalt tack coat is to be applied shall be provided.

603-3.3 Application of emulsified asphalt material. The emulsified asphalt shall not be diluted. Immediately before applying the emulsified asphalt tack coat, the full width of surface to be treated shall be swept with a power broom and/or power blower to remove all loose dirt and other objectionable material.

The emulsified asphalt material shall be uniformly applied with an asphalt distributor at the rates appropriate for the conditions and surface specified in the table below. The type of asphalt material and application rate shall be approved by the RPR prior to application.

EMULSIFIED ASPHALT

Surface Type	Residual Rate, gal/SY	Emulsion Application Bar Rate, gal/SY
New asphalt	0.02-0.05	0.03-0.07
Existing asphalt	0.04-0.07	0.06-0.11
Milled Surface	0.04-0.08	0.06-0.12
Concrete	0.03-0.05	0.05-0.08

After application of the tack coat, the surface shall be allowed to cure without being disturbed for the period of time necessary to permit drying and setting of the tack coat. This period shall be determined by the RPR. The Contractor shall protect the tack coat and maintain the surface until the next course has been placed. When the tack coat has been disturbed by the Contractor, tack coat shall be reapplied at the Contractor's expense.

603-3.4 Freight and waybills The Contractor shall submit waybills and delivery tickets, during progress of the work. Before the final statement is allowed, file with the RPR certified waybills and certified delivery tickets for all emulsified asphalt materials used in the construction of the pavement covered by the contract. Do not remove emulsified asphalt material from storage until the initial outage and temperature measurements have been taken. The delivery or storage units will not be released until the final outage has been taken.

METHOD OF MEASUREMENT

603-4.1 The emulsified asphalt material for tack coat shall *not be measured for separate payment.* ~~be measured by the [gallon] [ton]. Volume shall be corrected to the volume at 60°F in accordance with ASTM D1250. The emulsified asphalt material paid for will be the measured quantities used in the accepted work, provided that the measured quantities are not 10% over the specified application rate. Any amount of emulsified asphalt material more than 10% over the specified application rate for each application will be deducted from the measured quantities, except for irregular areas where hand spraying of the emulsified asphalt material is necessary. Water added to emulsified asphalt will not be measured for payment.~~

BASIS OF PAYMENT

603.5-1 *The emulsified asphalt material for tack coat shall not be paid for separately but shall be considered subsidiary to P-403 bid items.* ~~Payment shall be made at the contract unit price per [gallon] [ton] of emulsified asphalt material. This price shall be full compensation for furnishing all materials, for all preparation, delivery, and application of these materials, and for all labor, equipment, tools, and incidentals necessary to complete the item.~~

~~Payment will be made under:~~

~~Item P-603-5.1 Emulsified Asphalt Tack Coat - per [gallon] [ton]~~

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM International (ASTM)

ASTM D1250	Standard Guide for Use of the Petroleum Measurement Tables
ASTM D2995	Standard Practice for Estimating Application Rate and Residual Application Rate of Bituminous Distributors

ASTM D3628 Standard Practice for Selection and Use of Emulsified Asphalts

END ITEM P-603

PAGE INTENTIONALLY LEFT BLANK

ITEM P-604 COMPRESSION JOINT SEALS FOR CONCRETE PAVEMENTS

DESCRIPTION

604-1.1 This item shall consist of preformed polychloroprene compression seals used for sealing joints of rigid pavements.

MATERIALS

604-2.1 Compression seals. Compression joint seal materials shall be a vulcanized elastomeric compound using polychloroprene as the only base polymer. The material and the manufactured seal shall conform to ASTM D2628.

The joint seal shall be a labyrinth type seal. The uncompressed depth of the face of the compression seal (that is to be bonded to the joint wall) shall be greater than the uncompressed width of the seal, except that for seals one inch or greater in width, the depth need be only one inch or greater. The actual width of the uncompressed seal shall be as recommended by the joint seal manufacturer for the type and width of joints as shown on the plans. The tolerance on the seal shall be +1/8 inch or -1/16 inch, below the top of the pavement surface or bottom of groove for grooved pavement.

The Contractor shall provide a copy of the manufacturer's Certificate of Analysis (COA) for the joint seal material delivered to the project. The COA shall be provided to and approved by the RPR before the material is installed. The furnishing of the vendor's certified test report shall not be interpreted as a basis for final acceptance. The manufacturer's COA may be subject to verification by testing the material delivered for use on the project.

Materials delivered to the job site shall be inspected for defects, unloaded, and stored with a minimum of handling to avoid damage. Storage facilities shall be provided at the job site to protect materials from weather and maintain materials at temperatures recommended by the manufacturer.

Representative sample of joint seal material will be sampled and retained by the RPR for possible testing.

604-2.2 Lubricant/adhesive. Lubricant/adhesive used for the compression elastomeric joint seal shall be a one-component compound conforming to ASTM D2835.

CONSTRUCTION METHODS

604-3.1 Equipment. Machines, tools, and equipment used in the performance of the work required by this section shall be approved by the RPR before the work starts and shall be maintained by the Contractor in satisfactory condition at all times.

a. Joint cleaning equipment.

(1) Concrete saw. A self-propelled power saw with water-cooled diamond saw blades shall be provided for cutting joints to the depths and widths specified and for removing filler, existing old joint seal or other material embedded in the joints or adhered to the joint faces.

(2) Waterblasting equipment. Waterblasting equipment shall include a trailer-mounted water tank, pumps, high-pressure hose, a wand with safety release cutoff controls, nozzle, and auxiliary water resupply equipment. The water tank and auxiliary water resupply equipment shall be of sufficient capacity to permit continuous operations. The pumps, hoses, wand, and nozzle shall be of sufficient capacity to permit the cleaning of both walls of the joint and the pavement surface for a width of at least 1/2 inch on either side of the joint. The pump shall be capable of supplying a pressure of at least 3,000 psi. A pressure gauge mounted at the pump shall show at all times the pressure in pounds per square inch (psi) at which the equipment is operating.

(3) Sandblasting equipment. Sandblasting equipment shall include an air compressor, hose, and a long-wearing venturi-type nozzle of proper size, shape, and opening. The maximum nozzle opening should not exceed 1/4 inch. The air compressor shall be portable and shall be capable of furnishing not less than 150 cubic feet per minute and maintaining a line pressure of not less than 90 psi at the nozzle while in use. The compressor shall be equipped with traps that will maintain the compressed air free of oil

and water. The nozzle shall have an adjustable guide that will hold the nozzle aligned with the joint about one inch above the pavement surface and will direct the blast to clean the joint walls. The height, angle of inclination, and the size of the nozzle shall be adjusted as necessary to ensure satisfactory results.

b. Sealing equipment. Equipment used to install the compression seal shall place the compression seal to the prescribed depths within the specified tolerances without cutting, nicking, twisting, or otherwise damaging the seal. The equipment shall not stretch or compress the seal more than 2.0% longitudinally during installation. The machine shall be an automatic self-propelled joint seal application equipment and shall be engine powered. The machine shall include a reservoir for the lubricant/adhesive, a device for conveying the lubricant/adhesive in the proper quantities to the sides the preformed seal or the sidewalls of the joint, a reel capable of holding one full spool of compression seal, and a power-driven apparatus for feeding the joint seal through a compression device and inserting the seal into the joint. The equipment shall also include a guide to maintain the proper course along the joint being sealed. The machine shall at all times be operated by an experienced operator.

Hand operated joint seal application equipment may be used for localized areas and for projects less than 500 square yards. The equipment shall be a two-axle, four-wheel machine that includes means for compressing and inserting the compression seal into the joint and a reel capable of holding one full spool of compression seal material.

CONSTRUCTION METHODS

604-4.1 Environmental conditions. The ambient temperature and the pavement temperature within the joint wall shall be at least 35°F and rising at the time of installation of the materials. Sealant application will not be permitted if moisture or any foreign material is observed in the joint.

604-4.2 Trial joint seal and lubricant/adhesive installation. Prior to the cleaning and sealing of the joints for the entire project, a control strip at least 200 feet long shall be prepared at a location designated by the RPR using the specified materials and the approved equipment, to demonstrate the materials and construction processes for joint preparation and sealing of all types of joints included in the project. No other joints shall be sealed until the test installation has been approved by the RPR.

If materials or installation do not meet requirements, the materials shall be removed, and the joints shall be cleaned and a new trial joint seal installation shall be performed at the Contractor's expense. The RPR approved trial section will be incorporated into the permanent work.

604-4.3 Preparation of joints. Immediately before installation of the compression joint seal, the joints shall be thoroughly cleaned to remove all laitance, filler, existing sealer, foreign material and protrusions of hardened concrete from the sides and upper edges of the joint space to be sealed. Cleaning shall extend along pavement surfaces at least 1/2 inch on either side of the joint. After final cleaning and immediately prior to sealing, the joints shall be blown out with compressed air and left free of debris and water. Any irregularity in the joint face that would prevent uniform contact between the joint seal and the joint face shall be corrected prior to the installation of the joint seal.

a. Sawing. Joints shall be sawed to clean and to open them to the full specified width and depth. Immediately following the sawing operation, the joint faces and opening shall be thoroughly cleaned using a water jet to remove all saw cuttings or debris remaining on the faces or in the joint opening. Compression seal shall be installed within three (3) calendar days of the time the joint cavity is sawed. Depth of the joint cavity shall be in accordance with manufacturer's instructions. Submit printed copies of manufacturers' instructions 60 days prior to use on the project. The saw cut for the joint seal cavity shall at all locations be centered over the joint line. The nominal width of the sawed joint seal cavity shall be as follows; the actual width shall be within a tolerance of ±1/16 inch:

(1) If a nominal 13/16 inch wide compression seal is furnished, the nominal width of the saw cut shall be **8/16** inches when the pavement temperature at the time of sawing is between **+25** and **+80**°F. If the pavement temperature at the time of sawing is above this range, the nominal width of the saw cut shall be decreased 1/16 inch. If the pavement temperature at the time of sawing is below this range, the nominal width of the saw cut shall be increased 1/16 inch.

(2) If a nominal one inch wide compression seal is furnished, the nominal width of the saw cut shall be **9/16** inches when the pavement temperature at the time of sawing is between **+25** and **+140**°F. If the pavement temperature at the time of sawing is above this range, the nominal width of the saw cut shall be decreased 1/16 inch. If the pavement temperature at the time of sawing is below this range, the nominal width of the saw cut shall be increased 1/16 inch.

(3) The pavement temperature shall be measured and recorded in the presence of the RPR. Measurement shall be made each day before commencing sawing and at any other time during the day when the temperature appears to be moving out of the allowable sawing range.

b. Waterblast cleaning. The concrete joint faces and pavement surfaces extending at least 1/2 inch from the joint edges shall be waterblasted clean. A multiple pass technique shall be used until the surfaces are free of dust, dirt, curing compound, or any residue that might prevent ready insertion or uniform contact of the seal and bonding of the lubricant/adhesive to the concrete. After final cleaning and immediately prior to sealing, the joints shall be blown out with compressed air and left completely free of debris and water.

c. Sandblast cleaning. The concrete joint faces and pavement surfaces extending at least 1/2 inch from the joint edges shall be sandblasted clean. A multiple pass technique shall be used until the surfaces are free of dust, dirt, curing compound, or any residue that might prevent ready insertion or uniform contact of the seal and bonding of the lubricant/adhesive to the concrete. After final cleaning and immediately prior to sealing, the joints shall be blown out with compressed air and left completely free of debris and water.

d. Rate of progress. Cleaning of the joint faces shall be limited to the linear footage of joint that can be sealed during the same workday.

604-4.4 Installation of the compression seal.

a. Time of installation. Joints shall be sealed within three (3) calendar days of sawing the joint seal cavity and the final cleaning of the joint walls, or a temporary seal shall be installed to prevent infiltration of foreign material. If rain interrupts the sealing operations, the joints shall be washed, cleaned with air and be dry before proceeding with installing of the lubricant/adhesive and compression seal.

b. Installation Sequence. Longitudinal joints shall be sealed first, then seal the transverse joints. Transverse joint seals will be continuous from edge to edge of the pavement. Intersections shall be made monolithic by use of joint seal adhesive and care in fitting the intersection parts together. Seals which do not reach an intersection shall be removed and replaced with new seal as directed by the RPR at the Contractor's Expense. Seal extender pieces shall not be used at intersections.

c. Sealing joints. The sides of the joint seal or the sides of the joint shall be covered with a coating of lubricant/adhesive and the seal installed as specified. Butt joints and seal intersections shall be coated with liberal applications of lubricant/adhesive. Lubricant/adhesive spilled on the pavement shall be removed immediately to prevent setting on the pavement.

The joint seal shall be placed at a uniform depth within the tolerances specified. The compression joint seal shall be placed to a depth of 3/16 inch, ±1/8 inch, below the pavement surface or below the depth of the groove unless otherwise directed by the RPR.

The seal shall be installed in the longest practicable lengths in longitudinal joints and shall be cut at the joint intersections to provide continuous installation of the seal in the transverse joints. The joint seal shall be installed in an upright position, free from twisting, distortion, and cuts. If stretch of installed joint seal exceeds 1%, adjustments shall be made to the installation equipment and procedure. Stretch of installed joint seals exceeding 2% stretch shall be removed and replaced.

After installation of the longitudinal joint seals, it shall set for a minimum of one (1) hour prior to cutting the seal at the joint intersections. For all transverse joints, the minimum length of the preformed joint seal shall be the pavement width from edge to edge.

604-4.5 Clean-up. Upon completion of the project, all unused materials shall be removed from the site, all lubricant/adhesive on the pavement surface shall be removed, and the pavement shall be left in clean condition.

604-4.6 Quality Control and Quality Assurance.

a. Quality Control The application equipment shall be inspected to assure uniform application of lubricant/adhesive to the sides of the compression joint seal or the walls of the joint. Equipment causing cutting, twisting, nicking, excessive stretching or compressing of the compression seal, or improper application of the lubricant/adhesive, shall not be used until causes of the deficiencies are determined and corrected by the Contractor.

The seal shall be inspected by the Contractor a minimum of once per 400 feet of seal for compliance to the shrinkage or compression requirements. Measurements shall be made at the same interval to determine conformance with depth and width installation requirements.

b. Quality Assurance. Cleaned joints shall be approved by the RPR prior to installation of the lubricant/adhesive and compression joint seal.

Conformance to stretching and compression limitations shall be determined by the RPR using the following procedures:

(1) Mark the top surface of the compression seal at one foot intervals in a manner clear and durable to enable length determinations of the seal.

(2) After installation, the distance between the marks on the seal shall be measured by the Contractor.

(3) If the stretching or compression exceeds the specified limit, the seal shall be removed and replaced with new joint seal at the Contractor's Expense. The seal shall be removed up to the last correct measurement.

604-4.7 Acceptance. The joint sealing system (compression seal and lubricant/adhesive) shall be inspected by the RPR for proper rate of cure and bonding to the concrete, cuts, twists, nicks, and other deficiencies. Seals exhibiting any defects prior to final acceptance of the project, shall be removed from the joint, wasted, and replaced with new material in a satisfactory manner, at the Contractor's expense, as determined by the RPR.

METHOD OF MEASUREMENT

604-5.1 Measurement. ~~The quantity of compression joint seals installed and accepted, will be determined by the linear feet.~~ *No specific measurement will be made for this item, measurement will be considered subsidiary to Item P-501-8.1.*

BASIS OF PAYMENT

604-6.1 Payment. ~~Payment will be made at the contract unit bid prices per linear foot for the compression joint seals. The unit bid prices shall include the cost of all labor, materials, the use of all equipment, and tools required to complete the work.~~

~~Item P-604-6.1 Compression Joint Seals for Concrete Pavements – per linear feet~~

No specific payment will be made for this item, payment will be considered subsidiary to Item P-501-8.1.

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM International (ASTM)

ASTM D2628	Standard Specification for Preformed Polychloroprene Elastomeric Joint Seals for Concrete Pavements
ASTM D2835	Standard Specification for Lubricant for Installation of Preformed Compression Seals in Concrete Pavements

Corps of Engineers

CRD C548	Standard Specification for Jet-Fuel and Heat Resistant Preformed Polychloroprene Elastomeric Joint Seals for Rigid Pavements

Unified Facilities Criteria (UFC)

UFC 3-250-08FA	Standard Practice for Sealing Joints and Cracks in Rigid and Flexible Pavements

END ITEM P-604

PAGE INTENTIONALLY LEFT BLANK

ITEM P-620 RUNWAY AND TAXIWAY MARKING

DESCRIPTION

620-1.1 This item shall consist of the preparation and painting of numbers, markings, and stripes on the surface of runways, taxiways, and aprons, in accordance with these specifications and at the locations shown on the plans, or as directed by the Resident Project Representative (RPR). The terms "paint" and "marking material" as well as "painting" and "application of markings" are interchangeable throughout this specification.

MATERIALS

620-2.1 Materials acceptance. The Contractor shall furnish manufacturer's certified test reports, for materials shipped to the project. The certified test reports shall include a statement that the materials meet the specification requirements. This certification along with a copy of the paint manufacturer's surface preparation; marking materials, including adhesion, flow promoting and/or floatation additive; and application requirements must be submitted and approved by the Resident Project Representative (RPR) prior to the initial application of markings. The reports can be used for material acceptance or the RPR may perform verification testing. The reports shall not be interpreted as a basis for payment. The Contractor shall notify the RPR upon arrival of a shipment of materials to the site. All material shall arrive in sealed containers that are easily quantifiable for inspection by the RPR.

620-2.2 Marking materials.

Table 1. Marking Materials

Paint[1]				Glass Beads[2]	
Type	**Color**	**Fed Std. 595 Number**	**Application Rate Maximum**	**Type**	**Application Rate Minimum**
Waterborne Type I or II	Yellow	33538 or 33655	115 ft²/gal	Type I, Gradation A	7 lb/gal

[1] See paragraph 620-2.2a

[2] See paragraph 620-2.2b

a. Paint. Paint shall be waterborne in accordance with the requirements of this paragraph. Paint colors shall comply with Federal Standard No. 595.

Waterborne. Paint shall meet the requirements of Federal Specification TT-P-1952F, Type I or Type II. The non-volatile portion of the vehicle for all paint types shall be composed of a 100% acrylic polymer as determined by infrared spectral analysis.

b. Reflective media. Glass beads for white and yellow paint shall meet the requirements for Federal Specification TT-B-1325D Type I, Gradation A.

Glass beads for red and pink paint shall meet the requirements for Type I, Gradation A.

Glass beads shall be treated with all compatible coupling agents recommended by the manufacturers of the paint and reflective media to ensure adhesion and embedment.

Glass beads shall not be used in black and green paint.

Type III glass beads shall not be used in red and pink paint.

CONSTRUCTION METHODS

620-3.1 Weather limitations. Painting shall only be performed when the surface is dry, and the ambient temperature and the pavement surface temperature meet the manufacturer's recommendations in accordance with paragraph 620-2.1. Painting operations shall be discontinued when the ambient or surface temperatures does not meet the manufacturer's recommendations. Markings shall not be applied when the wind speed exceeds 10 mph unless windscreens are used to shroud the material guns. Markings shall not be applied when weather conditions are forecasts to not be within the manufacturers' recommendations for application and dry time.

620-3.2 Equipment. Equipment shall include the apparatus necessary to properly clean the existing surface, a mechanical marking machine, a bead dispensing machine, and such auxiliary hand-painting equipment as may be necessary to satisfactorily complete the job.

The mechanical marker shall be an atomizing spray-type or airless type marking machine with automatic glass bead dispensers suitable for application of traffic paint. It shall produce an even and uniform film thickness and appearance of both paint and glass beads at the required coverage and shall apply markings of uniform cross-sections and clear-cut edges without running or spattering and without over spray. The marking equipment for both paint and beads shall be calibrated daily.

620-3.3 Preparation of surfaces. Immediately before application of the paint, the surface shall be dry and free from dirt, grease, oil, laitance, or other contaminates that would reduce the bond between the paint and the pavement. Use of any chemicals or impact abrasives during surface preparation shall be approved in advance by the RPR. After the cleaning operations, sweeping, blowing, or rinsing with pressurized water shall be performed to ensure the surface is clean and free of grit or other debris left from the cleaning process.

a. Preparation of new pavement surfaces. The area to be painted shall be cleaned by broom, blower, water blasting, or by other methods approved by the RPR to remove all contaminants, including PCC curing compounds, minimizing damage to the pavement surface.

b. Preparation of pavement to remove existing markings. Existing pavement markings shall be removed by rotary grinding, water blasting, or by other methods approved by the RPR minimizing damage to the pavement surface. The removal area may need to be larger than the area of the markings to eliminate ghost markings. After removal of markings on asphalt pavements, apply a fog seal or seal coat to 'block out' the removal area to eliminate 'ghost' markings.

c. Preparation of pavement markings prior to remarking. Prior to remarking existing markings, loose existing markings must be removed minimizing damage to the pavement surface, with a method approved by the RPR. After removal, the surface shall be cleaned of all residue or debris.

Prior to the application of markings, the Contractor shall certify in writing that the surface is dry and free from dirt, grease, oil, laitance, or other foreign material that would prevent the bond of the paint to the pavement or existing markings. This certification along with a copy of the paint manufacturer's application and surface preparation requirements must be submitted to the RPR prior to the initial application of markings.

620-3.4 Layout of markings. The proposed markings shall be laid out in advance of the paint application. ~~The locations of markings to receive glass beads shall be shown on the plans.~~ *Glass*

620-3.5 Application. A period of 30 days shall elapse between placement of surface course or seal coat and application of the permanent paint markings. Paint shall be applied at the locations and to the dimensions and spacing shown on the plans. Paint shall not be applied until the layout and condition of the surface has been approved by the RPR.

The edges of the markings shall not vary from a straight line more than 1/2 inch in 50 feet, and marking dimensions and spacing shall be within the following tolerances:

Marking Dimensions and Spacing Tolerance

Dimension and Spacing	Tolerance
36 inch or less	±1/2 inch
greater than 36 inch to 6 feet	±1 inch
greater than 6 feet to 60 feet	±2 inch
greater than 60 feet	±3 inch

The paint shall be mixed in accordance with the manufacturer's instructions and applied to the pavement with a marking machine at the rate shown in Table 1. The addition of thinner will not be permitted.

Glass beads shall be distributed upon the marked areas ~~at the locations shown on the plans~~ to receive glass beads immediately after application of the paint. A dispenser shall be furnished that is properly designed for attachment to the marking machine and suitable for dispensing glass beads. Glass beads shall be applied at the rate shown in Table 1. Glass beads shall not be applied to black paint or green paint. Glass beads shall adhere to the cured paint or all marking operations shall cease until corrections are made. Different bead types shall not be mixed. Regular monitoring of glass bead embedment and distribution should be performed.

620-3.6 Application--preformed thermoplastic airport pavement markings.

Preformed thermoplastic pavement markings not used.

620-3.7 Control strip. Prior to the full application of airfield markings, the Contractor shall prepare a control strip in the presence of the RPR. The Contractor shall demonstrate the surface preparation method and all striping equipment to be used on the project. The marking equipment must achieve the prescribed application rate of paint and population of glass beads (per Table 1) that are properly embedded and evenly distributed across the full width of the marking. Prior to acceptance of the control strip, markings must be evaluated during darkness to ensure a uniform appearance.

620-3.8 Retro-reflectance. Reflectance shall be measured with a portable retro-reflectometer meeting ASTM E1710 (or equivalent). *Readings shall be taken as specified in the table below. The average of the test values for each marking type shall meet the minimum retro-reflectance values specified. The RPR shall determine the location of testing and may approve modifications to the table below.* ~~A total of 6 reading shall be taken over a 6 square foot area with 3 readings taken from each direction.~~ The average shall be equal to or above the minimum levels of all readings which are within 30% of each other. *Retroreflectivity testing shall be performed by the contractor.*

Retroreflectivity Testing Frequencies

Marking Type	***Testing Interval***
Taxiway Centerline Marking	*1 test per 200 linear feet*

Minimum Retro-Reflectance Values

Material	Retro-reflectance mcd/m²/lux		
	White	Yellow	Red
Initial Type I	300	175	35
~~Initial Type III~~	~~600~~	~~300~~	~~35~~
~~Initial Thermoplastic~~	~~225~~	~~100~~	~~35~~
All materials, remark when less than[1]	100	75	10

[1] Prior to remarking determine if removal of contaminants on markings will restore retro-reflectance

620-3.9 Protection and cleanup. After application of the markings, all markings shall be protected from damage until dry. All surfaces shall be protected from excess moisture and/or rain and from disfiguration by spatter, splashes, spillage, or drippings. The Contractor shall remove from the work area all debris, waste, loose reflective media, and by-products generated by the surface preparation and application operations to the satisfaction of the RPR. The Contractor shall dispose of these wastes in strict compliance with all applicable state, local, and federal environmental statutes and regulations.

METHOD OF MEASUREMENT

620-4.1 The quantity of surface preparation shall *not* be measured *separately.* ~~by [the number of square feet for each type of surface preparation specified in paragraph 620-3.3] [lump sum].~~

620-4.2 The quantity of markings shall be paid for shall be measured by the number of square feet of painting.

620-4.3 The quantity of reflective media shall *not* be paid for *separately.* ~~by [the number of pounds] [lump sum] of reflective media.~~

620-4.4 ~~The quantity of temporary markings to be paid for shall be the number of square feet of painting performed in accordance with the specifications and accepted by the RPR. Temporary marking includes surface preparation, application and complete removal of the temporary marking.~~

620-4.5 *Retroreflectivity testing of markings shall be subsidiary to other marking pay items.*

BASIS OF PAYMENT

620-5.1 Payment for surface preparation shall be *subsidiary to other items.* ~~made at the contract price for [the number of square feet for each type of surface preparation specified in paragraph 620-3.3] [lump sum].~~

620-5.2 Payment for markings shall be made at the contract price for by the number of square feet of painting.

620-5.3 Payment for reflective media shall be *subsidiary to other items.* ~~made at the contract unit price for [the number of pounds of reflective media] [lump sum].~~

620-5.4 Payment for temporary markings shall be made at the contract price for the number of square feet of painting. This price shall be full compensation for furnishing all materials and for all labor, equipment, tools, and incidentals necessary to complete the item.

620-5.6 *Payment for retroreflectivity testing shall not be paid for separately.*

Payment will be made under:

Item P-620-5.1	Runway and Taxiway Marking - per square foot

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM International (ASTM)

ASTM D476	Standard Classification for Dry Pigmentary Titanium Dioxide Products
ASTM D968	Standard Test Methods for Abrasion Resistance of Organic Coatings by Falling Abrasive
ASTM D1652	Standard Test Method for Epoxy Content of Epoxy Resins
ASTM D2074	Standard Test Method for Total, Primary, Secondary, and Tertiary Amine Values of Fatty Amines by Alternative Indicator Method
ASTM D2240	Standard Test Method for Rubber Property - Durometer Hardness
ASTM D7585	Standard Practice for Evaluating Retroreflective Pavement Markings Using Portable Hand-Operated Instruments
ASTM E303	Standard Test Method for Measuring Surface Frictional Properties Using the British Pendulum Tester
ASTM E1710	Standard Test Method for Measurement of Retroreflective Pavement Marking Materials with CEN-Prescribed Geometry Using a Portable Retroreflectometer
ASTM E2302	Standard Test Method for Measurement of the Luminance Coefficient Under Diffuse Illumination of Pavement Marking Materials Using a Portable Reflectometer
ASTM G154	Standard Practice for Operating Fluorescent Ultraviolet (UV) Lamp Apparatus for Exposure of Nonmetallic Materials

Code of Federal Regulations (CFR)

40 CFR Part 60, Appendix A-7, Method 24	Determination of volatile matter content, water content, density, volume solids, and weight solids of surface coatings
29 CFR Part 1910.1200	Hazard Communication

Federal Specifications (FED SPEC)

FED SPEC TT-B-1325D	Beads (Glass Spheres) Retro-Reflective
FED SPEC TT-P-1952F	Paint, Traffic and Airfield Marking, Waterborne
FED STD 595	Colors used in Government Procurement

Commercial Item Description

A-A-2886B	Paint, Traffic, Solvent Based

Advisory Circulars (AC)

AC 150/5340-1	Standards for Airport Markings

AC 150/5320-12	Measurement, Construction, and Maintenance of Skid Resistant Airport Pavement Surfaces

END OF ITEM P-620

ITEM T-901 SEEDING

DESCRIPTION

901-1.1 This item shall consist of soil preparation, seeding and fertilizing the areas shown on the plans or as directed by the RPR in accordance with these specifications.

MATERIALS

901-2.1 Seed. The species and application rates of grass, legume, and cover-crop seed furnished shall be those stipulated herein. Seed shall conform to the requirements of Federal Specification JJJ-S-181, Federal Specification, Seeds, Agricultural.

Seed shall be furnished separately or in mixtures in standard containers labeled in conformance with the Agricultural Marketing Service (AMS) Seed Act and applicable state seed laws with the seed name, lot number, net weight, percentages of purity and of germination and hard seed, and percentage of maximum weed seed content clearly marked for each kind of seed. The Contractor shall furnish the RPR duplicate signed copies of a statement by the vendor certifying that each lot of seed has been tested by a recognized laboratory for seed testing within six (6) months of date of delivery. This statement shall include: name and address of laboratory, date of test, lot number for each kind of seed, and the results of tests as to name, percentages of purity and of germination, and percentage of weed content for each kind of seed furnished, and, in case of a mixture, the proportions of each kind of seed. Wet, moldy, or otherwise damaged seed will be rejected.

Seeds shall be applied as *specified in the Standard Specifications, Section 805 – Seeding* ~~follows:~~

Seed Properties and Rate of Application

Seed	Minimum Seed Purity (Percent)	Minimum Germination (Percent)	Rate of Application lb/acre (or lb/1,000 S.F.)
Tall Fescue	97	85	20
Bermuda	95	80	15
Smooth Bromegrass	85	80	15

~~Seeding shall be performed during the period between [___] and [___] inclusive, unless otherwise approved by the RPR.~~

901-2.2 Lime. *If required,* lime shall be ground limestone containing not less than 85% of total carbonates, and shall be ground to such fineness that 90% will pass through a No. 20 (850 µm) mesh sieve and 50% will pass through a No. 100 (150 µm) mesh sieve. Coarser material will be acceptable, providing the rates of application are increased to provide not less than the minimum quantities and depth specified in the special provisions on the basis of the two sieve requirements above. Dolomitic lime or a high magnesium lime shall contain at least 10% of magnesium oxide. Lime shall be applied at the rate *specified by the tests furnished in T-905.* All liming materials shall conform to the requirements of ASTM C602.

901-2.3 Fertilizer. Fertilizer shall be standard commercial fertilizers supplied separately or in mixtures containing the percentages of total nitrogen, available phosphoric acid, and water-soluble potash. They shall be applied at the rate and to the depth specified, and shall meet the requirements of applicable state laws. They shall be furnished in standard containers with name, weight, and guaranteed analysis of contents clearly marked thereon. No cyanamide compounds or hydrated lime shall be permitted in mixed fertilizers.

The fertilizers may be supplied in one of the following forms:

a. A dry, free-flowing fertilizer suitable for application by a common fertilizer spreader;

b. A finely-ground fertilizer soluble in water, suitable for application by power sprayers; or

c. A granular or pellet form suitable for application by blower equipment.

Fertilizers shall be 10-20-10 commercial fertilizer and shall be spread at the rate of 500 lbs/acre.

901-2.4 Soil for repairs. The soil for fill and topsoiling of areas to be repaired shall be at least of equal quality to that which exists in areas adjacent to the area to be repaired. The soil shall be relatively free from large stones, roots, stumps, or other materials that will interfere with subsequent sowing of seed, compacting, and establishing turf, and shall be approved by the RPR before being placed.

CONSTRUCTION METHODS

901-3.1 Advance preparation and cleanup. After grading of areas has been completed and before applying fertilizer and ground limestone, areas to be seeded shall be raked or otherwise cleared of stones larger than 2 inches in any diameter, sticks, stumps, and other debris that might interfere with sowing of seed, growth of grasses, or subsequent maintenance of grass-covered areas. If any damage by erosion or other causes has occurred after the completion of grading and before beginning the application of fertilizer and ground limestone, the Contractor shall repair such damage include filling gullies, smoothing irregularities, and repairing other incidental damage.

An area to be seeded shall be considered a satisfactory seedbed without additional treatment if it has recently been thoroughly loosened and worked to a depth of not less than 5 inches as a result of grading operations and, if immediately prior to seeding, the top 3 inches of soil is loose, friable, reasonably free from large clods, rocks, large roots, or other undesirable matter, and if shaped to the required grade.

When the area to be seeded is sparsely sodded, weedy, barren and unworked, or packed and hard, any grass and weeds shall first be cut or otherwise satisfactorily disposed of, and the soil then scarified or otherwise loosened to a depth not less than 5 inches. Clods shall be broken and the top 3 inches of soil shall be worked into a satisfactory seedbed by discing, or by use of cultipackers, rollers, drags, harrows, or other appropriate means.

901-3.2 Dry application method.

a. Liming. *If required,* Lime shall be applied separately and prior to the application of any fertilizer or seed and only on seedbeds that have previously been prepared as described above. The lime shall then be worked into the top 3 inches of soil after which the seedbed shall again be properly graded and dressed to a smooth finish.

b. Fertilizing. Following advance preparations and cleanup fertilizer shall be uniformly spread at the rate that will provide not less than the minimum quantity stated in paragraph 901-2.3.

c. Seeding. Grass seed shall be sown at the rate specified in paragraph 901-2.1 immediately after fertilizing. The fertilizer and seed shall be raked within the depth range stated in the special provisions. Seeds of legumes, either alone or in mixtures, shall be inoculated before mixing or sowing, in accordance with the instructions of the manufacturer of the inoculant. When seeding is required at other than the seasons shown on the plans or in the special provisions, a cover crop shall be sown by the same methods required for grass and legume seeding.

d. Rolling. After the seed has been properly covered, the seedbed shall be immediately compacted by means of an approved lawn roller, weighing 40 to 65 pounds per foot of width for clay soil (or any soil having a tendency to pack), and weighing 150 to 200 pounds per foot of width for sandy or light soils.

901-3.3 Wet application method.

a. General. The Contractor may elect to apply seed and fertilizer (and lime, if required) by spraying them on the previously prepared seedbed in the form of an aqueous mixture and by using the methods and equipment described herein. The rates of application shall be as specified in the special provisions.

b. Spraying equipment. The spraying equipment shall have a container or water tank equipped with a liquid level gauge calibrated to read in increments not larger than 50 gallons over the entire range of the tank capacity, mounted so as to be visible to the nozzle operator. The container or tank shall also be equipped with a mechanical power-driven agitator capable of keeping all the solids in the mixture in complete suspension at all times until used.

The unit shall also be equipped with a pressure pump capable of delivering 100 gallons per minute at a pressure of 100 lb / sq inches. The pump shall be mounted in a line that will recirculate the mixture through the tank whenever it is not being sprayed from the nozzle. All pump passages and pipe lines shall be capable of providing clearance for 5/8 inch solids. The power unit for the pump and agitator shall have controls mounted so as to be accessible to the nozzle operator. There shall be an indicating pressure gauge connected and mounted immediately at the back of the nozzle.

The nozzle pipe shall be mounted on an elevated supporting stand in such a manner that it can be rotated through 360 degrees horizontally and inclined vertically from at least 20 degrees below to at least 60 degrees above the horizontal. There shall be a quick-acting, three-way control valve connecting the recirculating line to the nozzle pipe and mounted so that the nozzle operator can control and regulate the amount of flow of mixture delivered to the nozzle. At least three different types of nozzles shall be supplied so that mixtures may be properly sprayed over distance varying from 20 to 100 feet. One shall be a close-range ribbon nozzle, one a medium-range ribbon nozzle, and one a long-range jet nozzle. For case of removal and cleaning, all nozzles shall be connected to the nozzle pipe by means of quick-release couplings.

In order to reach areas inaccessible to the regular equipment, an extension hose at least 50 feet in length shall be provided to which the nozzles may be connected.

c. Mixtures. Lime, if required, shall be applied separately, in the quantity specified, prior to the fertilizing and seeding operations. Not more than 220 pounds of lime shall be added to and mixed with each 100 gallons of water. Seed and fertilizer shall be mixed together in the relative proportions specified, but not more than a total of 220 pounds of these combined solids shall be added to and mixed with each 100 gallons of water.

All water used shall be obtained from fresh water sources and shall be free from injurious chemicals and other toxic substances harmful to plant life. The Contractor shall identify to the RPR all sources of water at least two (2) weeks prior to use. The RPR may take samples of the water at the source or from the tank at any time and have a laboratory test the samples for chemical and saline content. The Contractor shall not use any water from any source that is disapproved by the RPR following such tests.

All mixtures shall be constantly agitated from the time they are mixed until they are finally applied to the seedbed. All such mixtures shall be used within two (2) hours from the time they were mixed or they shall be wasted and disposed of at approved locations.

d. Spraying. Lime, if required, shall be sprayed only upon previously prepared seedbeds. After the applied lime mixture has dried, the lime shall be worked into the top 3 inches, after which the seedbed shall again be properly graded and dressed to a smooth finish.

Mixtures of seed and fertilizer shall only be sprayed upon previously prepared seedbeds on which the lime, if required, shall already have been worked in. The mixtures shall be applied by means of a high-pressure spray that shall always be directed upward into the air so that the mixtures will fall to the ground like rain in a uniform spray. Nozzles or sprays shall never be directed toward the ground in such a manner as might produce erosion or runoff.

Particular care shall be exercised to ensure that the application is made uniformly and at the prescribed rate and to guard against misses and overlapped areas. Proper predetermined quantities of the mixture in accordance with specifications shall be used to cover specified sections of known area.

Checks on the rate and uniformity of application may be made by observing the degree of wetting of the ground or by distributing test sheets of paper or pans over the area at intervals and observing the quantity of material deposited thereon.

On surfaces that are to be mulched as indicated by the plans or designated by the RPR, seed and fertilizer applied by the spray method need not be raked into the soil or rolled. However, on surfaces on which mulch is not to be used, the raking and rolling operations will be required after the soil has dried.

901-3.4 Maintenance of seeded areas. The Contractor shall protect seeded areas against traffic or other use by warning signs or barricades, as approved by the RPR. Surfaces gullied or otherwise damaged following seeding shall be repaired by regrading and reseeding as directed. The Contractor shall mow, water as directed, and otherwise maintain seeded areas in a satisfactory condition until final inspection and acceptance of the work.

When either the dry or wet application method outlined above is used for work done out of season, it will be required that the Contractor establish a good stand of grass of uniform color and density to the satisfaction of the RPR. A grass stand shall be considered adequate when bare spots are one square foot or less, randomly dispersed, and do not exceed 3% of the area seeded.

METHOD OF MEASUREMENT

901-4.1 The quantity of seeding to be paid for shall be the number of acres measured on the ground surface, completed and accepted. *Seeding shall be measured to the nearest tenth (0.1) of an acre. Lime and fertilizer will not be measured for separate payment but will be considered subsidiary to seeding.*

BASIS OF PAYMENT

901-5.1 Payment shall be made at the contract unit price per acres or fraction thereof, which price and payment shall be full compensation for furnishing and placing all material and for all labor, equipment, tools, and incidentals necessary to complete the work prescribed in this item.

Payment will be made under:

Item T-901-5.1	Seeding - per acre

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM International (ASTM)

ASTM C602	Standard Specification for Agricultural Liming Materials

Federal Specifications (FED SPEC)

FED SPEC	JJJ-S-181, Federal Specification, Seeds, Agricultural

Advisory Circulars (AC)

AC 150/5200-33	Hazardous Wildlife Attractants on or Near Airports

FAA/United States Department of Agriculture

Wildlife Hazard Management at Airports, A Manual for Airport Personnel

END OF ITEM T-901

ITEM T-904 SODDING

DESCRIPTION

904-1.1 This item shall consist of furnishing, hauling, and placing approved live sod on prepared areas in accordance with this specification at the locations shown on the plans or as directed by the ~~RPR~~ Engineer.

MATERIALS

904-2.1 Sod. Sod furnished by the Contractor shall have a good cover of living or growing grass. This shall be interpreted to include grass that is seasonally dormant during the cold or dry seasons and capable of renewing growth after the dormant period. All sod shall be obtained from areas where the soil is reasonably fertile and contains a high percentage of loamy topsoil. Sod shall be cut or stripped from living, thickly matted turf relatively free of weeds or other undesirable foreign plants, large stones, roots, or other materials that might be detrimental to the development of the sod or to future maintenance. At least 70% of the plants in the cut sod shall be composed of the species stated in the MoDOT *Standard Specifications, Section 803 – Sodding* ~~special provisions~~, and any vegetation more than 6 inches in height shall be mowed to a height of 3 inches or less before sod is lifted. Sod, including the soil containing the roots and the plant growth showing above, shall be cut uniformly to a thickness not less than that stated in the MoDOT *Standard Specifications, Section 803 – Sodding* ~~special provisions~~. *Type of sod shall be the type specified in the MoDOT Standard Specifications, Section 803 – Sodding.*

904-2.2 Lime. Not Used.

904-2.3 Fertilizer. Fertilizer shall be standard commercial fertilizers supplied separately or in mixtures containing the percentages of total nitrogen, available phosphoric acid, and water-soluble potash. They shall be applied at the rate and to the depth specified, and shall meet the requirements of applicable state laws. They shall be furnished in standard containers with name, weight, and guaranteed analysis of contents clearly marked thereon. No cyanamide compounds or hydrated lime shall be permitted in mixed fertilizers.

The fertilizers may be supplied in one of the following forms:

a. A dry, free-flowing fertilizer suitable for application by a common fertilizer spreader;

b. A finely-ground fertilizer soluble in water, suitable for application by power sprayers; or

c. A granular or pellet form suitable for application by blower equipment.

Fertilizers shall be 10-20-10 commercial fertilizer and shall be spread at the rate of 250 pounds per acre.

904-2.4 Water. The water shall be sufficiently free from oil, acid, alkali, salt, or other harmful materials that would inhibit the growth of grass. It shall be subject to the approval of the Engineer prior to use.

904-2.5 Soil for repairs. The soil for fill and topsoiling of areas to be repaired shall be at least of equal quality to that which exists in areas adjacent to the area to be repaired. The soil shall be relatively free from large stones, roots, stumps, or other materials that will interfere with subsequent sowing of seed, compacting, and establishing turf, and shall be approved by the ~~RPR~~ Engineer before being placed.

CONSTRUCTION METHODS

904-3.1 General. Areas to be solid, strip, or spot sodded shall be shown on the plans. Areas requiring special ground surface preparation such as tilling and those areas in a satisfactory condition that are to remain undisturbed shall also be shown on the plans.

Suitable equipment necessary for proper preparation of the ground surface and for the handling and placing of all required materials shall be on hand, in good condition, and shall be approved by the RPR before the various operations are started. The Contractor shall demonstrate to the RPR before starting the various operations that the application of required materials will be made at the specified rates.

904-3.2 Preparing the ground surface. After grading of areas has been completed and before applying fertilizer and limestone, areas to be sodded shall be raked or otherwise cleared of stones larger than 2 inches in any diameter, sticks, stumps, and other debris which might interfere with sodding, growth of grasses, or subsequent maintenance of grass-covered areas. If any damage by erosion or other causes occurs after grading of areas and before beginning the application of fertilizer and ground limestone, the Contractor shall repair such damage. This may include filling gullies, smoothing irregularities, and repairing other incidental damage.

904-3.3 Applying fertilizer and ground limestone. Following ground surface preparation, fertilizer shall be uniformly spread at a rate which will provide not less than the minimum quantity of each fertilizer ingredient, as stated in the special provisions. If use of ground limestone is required, it shall then be spread at a rate that will provide not less than the minimum quantity stated in the special provisions. These materials shall be incorporated into the soil to a depth of not less than 2 inches by discing, raking, or other suitable methods. Any stones larger than 2 inches in any diameter, large clods, roots, and other litter brought to the surface by this operation shall be removed.

904-3.4 Obtaining and delivering sod. After inspection and approval of the source of sod by the RPR, the sod shall be cut with approved sod cutters to such a thickness that after it has been transported and placed on the prepared bed, but before it has been compacted, it shall have a uniform thickness of not less than 2 inches. Sod sections or strips shall be cut in uniform widths, not less than 10 inches, and in lengths of not less than 18 inches, but of such length as may be readily lifted without breaking, tearing, or loss of soil. Where strips are required, the sod must be rolled without damage with the grass folded inside. The Contractor may be required to mow high grass before cutting sod.

The sod shall be transplanted within 24 hours from the time it is stripped, unless circumstances beyond the Contractor's control make storing necessary. In such cases, sod shall be stacked, kept moist, and protected from exposure to the air and sun and shall be kept from freezing. Sod shall be cut and moved only when the soil moisture conditions are such that favorable results can be expected. Where the soil is too dry, approval to cut sod may be granted only after it has been watered sufficiently to moisten the soil to the depth the sod is to be cut.

904-3.5 Laying sod. Sodding shall be performed only during the seasons when satisfactory results can be expected. Frozen sod shall not be used and sod shall not be placed upon frozen soil. Sod may be transplanted during periods of drought with the approval of the RPR, provided the sod bed is watered to moisten the soil to a depth of at least 4 inches immediately prior to laying the sod.

The sod shall be moist and shall be placed on a moist earth bed. Pitch forks shall not be used to handle sod, and dumping from vehicles shall not be permitted. The sod shall be carefully placed by hand, edge to edge and with staggered joints, in rows at right angles to the slopes, commencing at the base of the area to be sodded and working upward. The sod shall immediately be pressed firmly into contact with the sod bed by tamping or rolling with approved equipment to provide a true and even surface, and ensure knitting without displacement of the sod or deformation of the surfaces of sodded areas. Where the sod may be displaced during sodding operations, the workmen, when replacing it, shall work from ladders or treaded planks to prevent further displacement. Screened soil of good quality shall be used to fill all cracks between sods. The quantity of the fill soil shall not cause smothering of the grass. Where the grades are such that the flow of water will be from paved surfaces across sodded areas, the surface of the soil in the sod after compaction shall be set approximately one inch below the pavement edge. Where the flow will be over the sodded areas and onto the paved surfaces around manholes and inlets, the surface of the soil in the sod after compaction shall be placed flush with pavement edges.

On slopes steeper than one (1) vertical to 2-1/2 horizontal and in v-shaped or flat-bottom ditches or gutters, the sod shall be pegged with wooden pegs not less than 12 inches in length and have a cross-sectional area of not less than 3/4 sq inch. The pegs shall be driven flush with the surface of the sod.

904-3.6 Watering. Adequate water and watering equipment must be on hand before sodding begins, and sod shall be kept moist until it has become established and its continued growth assured. In all cases, watering shall be done in a manner that will avoid erosion from the application of excessive quantities and will avoid damage to the finished surface.

904-3.7 Establishing turf. The Contractor shall provide general care for the sodded areas as soon as the sod has been laid and shall continue until final inspection and acceptance of the work. All sodded areas shall be protected against traffic or other use by warning signs or barricades approved by the RPR. The Contractor shall mow the sodded areas with approved mowing equipment, depending upon climatic and growth conditions and the needs for mowing specific areas. Weeds or other undesirable vegetation shall be mowed and the clippings raked and removed from the area.

904-3.8 Repairing. When the surface has become gullied or otherwise damaged during the period covered by this contract, the affected areas shall be repaired to re-establish the grade and the condition of the soil, as directed by the RPR, and shall then be sodded as specified in paragraph 904-3.5.

METHOD OF MEASUREMENT

904-4.1 This item shall be measured on the basis of the area in square yards of the surface covered with sod and accepted.

BASIS OF PAYMENT

904-5.1 This item will be paid for on the basis of the contract unit price per square yard for sodding, which price shall be full compensation for all labor, equipment, material, staking, and incidentals necessary to satisfactorily complete the items as specified.

Payment will be made under:

Item T-904-5.1	Sodding - per square yard

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM International (ASTM)

ASTM C602	Standard Specification for Agricultural Liming Materials

Advisory Circulars (AC)

AC 150/5200-33	Hazardous Wildlife Attractants on or Near Airports

FAA/United States Department of Agriculture

Wildlife Hazard Management at Airports, A Manual for Airport Personnel

END OF ITEM T-904

PAGE INTENTIONALLY LEFT BLANK

ITEM T-905 TOPSOIL

DESCRIPTION

905-1.1 This item shall consist of preparing the ground surface for topsoil application, removing topsoil from designated stockpiles or areas to be stripped on the site or from approved sources off the site, and placing and spreading the topsoil on prepared areas in accordance with this specification at the locations shown on the plans or as directed by the RPR.

MATERIALS

905-2.1 Topsoil. Topsoil shall be the surface layer of soil with no admixture of refuse or any material toxic to plant growth, and it shall be reasonably free from subsoil and stumps, roots, brush, stones (2 inches) or more in diameter), and clay lumps or similar objects. Brush and other vegetation that will not be incorporated with the soil during handling operations shall be cut and removed. Ordinary sod and herbaceous growth such as grass and weeds are not to be removed, but shall be thoroughly broken up and intermixed with the soil during handling operations. Heavy sod or other cover, which cannot be incorporated into the topsoil by discing or other means, shall be removed. The topsoil or soil mixture, unless otherwise specified or approved, shall have a pH range of approximately 5.5 pH to 7.6 pH, when tested in accordance with the methods of testing of the Association of Official Agricultural Chemists in effect on the date of invitation of bids. The organic content shall be not less than 3% nor more than 20% as determined by the wet-combustion method (chromic acid reduction). There shall be not less than 20% nor more than 80% of the material passing the 200 mesh (75 µm) sieve as determined by the wash test in accordance with ASTM C117. *Topsoil testing shall be completed and paid for by the Contractor.*

Natural topsoil may be amended by the Contractor with approved materials and methods to meet the above specifications.

905-2.2 Inspection and tests. Within 10 days following acceptance of the bid, the RPR shall be notified of the source of topsoil to be furnished by the Contractor. The topsoil shall be inspected to determine if the selected soil meets the requirements specified and to determine the depth to which stripping will be permitted. At this time, the Contractor may be required to take representative soil samples from several locations within the area under consideration and to the proposed stripping depths, for testing purposes as specified in paragraph 905-2.1.

CONSTRUCTION METHODS

905-3.1 General. Areas to be topsoiled shall be shown on the plans. If topsoil is available on the site, the location of the stockpiles or areas to be stripped of topsoil and the stripping depths shall be shown on the plans.

Suitable equipment necessary for proper preparation and treatment of the ground surface, stripping of topsoil, and for the handling and placing of all required materials shall be on hand, in good condition, and approved by the RPR before the various operations are started.

905-3.2 Preparing the ground surface. Immediately prior to dumping and spreading the topsoil on any area, the surface shall be loosened by discs or spike-tooth harrows, or by other means approved by the RPR, to a minimum depth of 2 inches to facilitate bonding of the topsoil to the covered subgrade soil. The surface of the area to be topsoiled shall be cleared of all stones larger than 2 inches in any diameter and all litter or other material which may be detrimental to proper bonding, the rise of capillary moisture, or the proper growth of the desired planting. Limited areas, as shown on the plans, which are too compact to respond to these operations shall receive special scarification.

Grades on the area to be topsoiled, which have been established by others as shown on the plans, shall be maintained in a true and even condition. Where grades have not been established, the areas shall be smooth-graded and the surface left at the prescribed grades in an even and compacted condition to prevent the formation of low places or pockets where water will stand.

905-3.3 Obtaining topsoil. Prior to the stripping of topsoil from designated areas, any vegetation, briars, stumps and large roots, rubbish or stones found on such areas, which may interfere with subsequent operations, shall be removed using methods approved by the RPR. Heavy sod or other cover, which cannot be incorporated into the topsoil by discing or other means shall be removed.

When suitable topsoil is available on the site, the Contractor shall remove this material from the designated areas and to the depth as directed by the RPR. The topsoil shall be spread on areas already tilled and smooth-graded, or stockpiled in areas approved by the RPR. Any topsoil stockpiled by the Contractor shall be rehandled and placed without additional compensation. Any topsoil that has been stockpiled on the site by others, and is required for topsoil purposes, shall be removed and placed by the Contractor. The sites of all stockpiles and areas adjacent thereto which have been disturbed by the Contractor shall be graded if required and put into a condition acceptable for seeding.

When suitable topsoil is secured off the airport site, the Contractor shall locate and obtain the supply, subject to the approval of the RPR. The Contractor shall notify the RPR sufficiently in advance of operations in order that necessary measurements and tests can be made. The Contractor shall remove the topsoil from approved areas and to the depth as directed. The topsoil shall be hauled to the site of the work and placed for spreading, or spread as required. Any topsoil hauled to the site of the work and stockpiled shall be rehandled and placed without additional compensation.

905-3.4 Placing topsoil. The topsoil shall be evenly spread on the prepared areas to a uniform depth of 4 ~~2~~ inches after compaction, unless otherwise shown on the plans or stated in the special provisions. Spreading shall not be done when the ground or topsoil is frozen, excessively wet, or otherwise in a condition detrimental to the work. Spreading shall be carried on so that turfing operations can proceed with a minimum of soil preparation or tilling.

After spreading, any large, stiff clods and hard lumps shall be broken with a pulverizer or by other effective means, and all stones or rocks (2 inches or more in diameter), roots, litter, or any foreign matter shall be raked up and disposed of by the Contractor. after spreading is completed, the topsoil shall be satisfactorily compacted by rolling with a cultipacker or by other means approved by the RPR. The compacted topsoil surface shall conform to the required lines, grades, and cross-sections. Any topsoil or other dirt falling upon pavements as a result of hauling or handling of topsoil shall be promptly removed.

METHOD OF MEASUREMENT

905-4.1 Topsoil obtained on the site shall be measured by the *area in square yards of the specified thickness of topsoil rehandled and placed from the topsoil stockpiled under Item P-152-2.14 as accepted by the RPR. Topsoiling shall not be measured for payment separately and shall be subsidiary to the item it is contained.* ~~number of cubic yards of topsoil measured in its original position and stripped or excavated. Topsoil stockpiled by others and removed for topsoil by the Contractor shall be measured by the number of cubic yards of topsoil measured in the stockpile. Topsoil shall be measured by volume in cubic yards computed by the method of end areas.~~

~~**905-4.2** Topsoil obtained off the site shall be measured by the number of *square yards at the specified thickness* cubic yards of topsoil measured in its *final* original position and stripped or excavated. Topsoil shall be measured by volume in cubic yards computed by the method of end areas.~~

BASIS OF PAYMENT

905-5.1 Payment will not be made at and shall be considered subsidiary to the item in which it is contained. ~~the contract unit price per *square yard of the specified thickness* cubic yard for topsoil (obtained on the site). This price shall be full compensation for furnishing all materials and for all preparation, placing, and spreading of the materials, and for all labor, equipment, tools, and incidentals necessary to complete the item.~~

~~**905-5.2** Payment will be made at the contract unit price per *square yard of the specified thickness* cubic yard for topsoil (obtained off the site). This price shall be full compensation for furnishing all materials and for all preparation, placing, and spreading of the materials, and for all labor, equipment, tools, and incidentals necessary to complete the item.~~

Payment will be made under:

~~Item T-905-5.1 Topsoil (Obtained off Site) (4 in Thickness) per square yard~~

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM International (ASTM)

ASTM C117	Materials Finer than 75 μm (No. 200) Sieve in Mineral Aggregates by Washing

Advisory Circulars (AC)

AC 150/5200-33	Hazardous Wildlife Attractants on or Near Airports

FAA/United States Department of Agriculture

Wildlife Hazard Management at Airports, A Manual for Airport Personnel

END OF ITEM T-905

PAGE INTENTIONALLY LEFT BLANK

ITEM T-908 MULCHING

DESCRIPTION

908-1.1 This item shall consist of furnishing, hauling, placing, and securing mulch on surfaces indicated on the plans or designated by the RPR.

MATERIALS

908-2.1 Mulch material. Acceptable mulch shall be the materials listed below or any approved locally available material that is similar to those specified. Mulch shall be free from noxious weeds, mold, and other deleterious materials. Mulch materials, which contain matured seed of species that would volunteer and be detrimental to the proposed overseeding, or to surrounding farm land, will not be acceptable. Straw or other mulch material which is fresh and/or excessively brittle, or which is in such an advanced stage of decomposition as to smother or retard the planted grass, will not be acceptable.

~~**a. Hay.** Hay shall be native hay in an air-dry condition and of proper consistency for placing with commercial mulch blowing equipment. Hay shall be sterile, containing no fertile seed.~~

~~**b. Straw.** Straw shall be the stalks from threshed plant residue of oats, wheat, barley, rye, or rice from which grain has been removed. Furnish in air-dry condition and of proper consistency for placing with commercial mulch blowing equipment. Straw shall contain no fertile seed.~~

~~**c. Hay mulch containing seed.** Hay mulch shall be mature hay containing viable seed of native grasses or other desirable species stated in the special provisions or as approved by the RPR. The hay shall be cut and handled so as to preserve the maximum quantity of viable seed. Hay mulch that cannot be hauled and spread immediately after cutting shall be placed in weather-resistant stacks or baled and stored in a dry location until used.~~

d. Manufactured mulch. Cellulose-fiber or wood-pulp mulch shall be products commercially available for use in spray applications.

e. Asphalt binder. Asphalt binder material shall conform to the requirements of ASTM D977, Type SS-1 or RS-1.

908-2.2 Inspection. The RPR shall be notified of sources and quantities of mulch materials available and the Contractor shall furnish him with representative samples of the materials to be used 30 days before delivery to the project. These samples may be used as standards with the approval of the RPR and any materials brought on the site that do not meet these standards shall be rejected.

CONSTRUCTION METHODS

908-3.1 Mulching. Before spreading mulch, all large clods, stumps, stones, brush, roots, and other foreign material shall be removed from the area to be mulched. Mulch shall be applied immediately after seeding. The spreading of the mulch may be by hand methods, blower, or other mechanical methods, provided a uniform covering is obtained.

Mulch material shall be furnished, hauled, and evenly applied on the area shown on the plans or designated by the RPR. Straw or hay shall be spread over the surface to a uniform thickness at the rate of 2 to 3 tons per acre to provide a loose depth of not less than 1-1/2 inches nor more than 3 inches. Other organic material shall be spread at the rate directed by the RPR. Mulch may be blown on the slopes and the use of cutters in the equipment for this purpose will be permitted to the extent that at least 95% of the mulch in place on the slope shall be 6 inches or more in length. When mulches applied by the blowing method are cut, the loose depth in place shall be not less than one inch nor more than 2 inches.

908-3.2 Securing mulch. The mulch shall be held in place by light discing, a very thin covering of topsoil, pins, stakes, wire mesh, asphalt binder, or other adhesive material approved by the RPR. Where mulches have been secured by either of the asphalt binder methods, it will not be permissible to walk on the slopes after the binder has been applied. When an application of asphalt binder material is used to secure the

mulch, the Contractor must take every precaution to guard against damaging or disfiguring structures or property on or adjacent to the areas worked and will be held responsible for any such damage resulting from the operation.

If the "peg and string" method is used, the mulch shall be secured by the use of stakes or wire pins driven into the ground on 5-foot centers or less. Binder twine shall be strung between adjacent stakes in straight lines and crisscrossed diagonally over the mulch, after which the stakes shall be firmly driven nearly flush to the ground to draw the twine down tight onto the mulch.

908-3.3 Care and repair.

a. The Contractor shall care for the mulched areas until final acceptance of the project. Care shall consist of providing protection against traffic or other use by placing warning signs, as approved by the RPR, and erecting any barricades that may be shown on the plans before or immediately after mulching has been completed on the designated areas.

b. The Contractor shall be required to repair or replace any mulch that is defective or becomes damaged until the project is finally accepted. When, in the judgment of the RPR, such defects or damages are the result of poor workmanship or failure to meet the requirements of the specifications, the cost of the necessary repairs or replacement shall be borne by the Contractor.

c. If the "asphalt spray" method is used, all mulched surfaces shall be sprayed with asphalt binder material so that the surface has a uniform appearance. The binder shall be uniformly applied to the mulch at the rate of approximately 8 gallons per 1,000 square feet, or as directed by the RPR, with a minimum of 6 gallons and a maximum of 10 gallons per 1,000 square feet depending on the type of mulch and the effectiveness of the binder securing it. Asphalt binder material may be sprayed on the mulched slope areas from either the top or the bottom of the slope. An approved spray nozzle shall be used. The nozzle shall be operated at a distance of not less than 4 feet from the surface of the mulch and uniform distribution of the asphalt material shall be required. A pump or an air compressor of adequate capacity shall be used to ensure uniform distribution of the asphalt material.

d. If the "asphalt mix" method is used, the mulch shall be applied by blowing, and the asphalt binder material shall be sprayed into the mulch as it leaves the blower. The binder shall be uniformly applied to the mulch at the rate of approximately 8 gallons per 1,000 square feet or as directed by the RPR, with a minimum of 6 gallons and a maximum of 10 gallons per 1,000 square feet depending on the type of mulch and the effectiveness of the binder securing it.

METHOD OF MEASUREMENT

908-4.1 ~~Mulching shall be measured in square yards on the basis of the actual surface area acceptably mulched.~~ *Mulching shall not be measured for separate payment.*

BASIS OF PAYMENT

908-5.1 ~~Payment will be made at the contract unit price per square yard for mulching. The price shall be full compensation for furnishing all materials and for placing and anchoring the materials, and for all labor, equipment, tools, and incidentals necessary to complete the item.~~ *Payment for mulching shall be subsidiary to other contract items.*

REFERENCES

The publications listed below form a part of this specification to the extent referenced. The publications are referred to within the text by the basic designation only.

ASTM International (ASTM)

ASTM D977	Standard Specification for Emulsified Asphalt

Advisory Circulars (AC)

AC 150/5200-33	Hazardous Wildlife Attractants on or Near Airports

FAA/United States Department of Agriculture

Wildlife Hazard Management at Airports, A Manual for Airport Personnel

END OF ITEM T-908

PAGE INTENTIONALLY LEFT BLANK